



LED LIGHTBULB A19

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 6W
- 9W
- 15W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Closed angle reflector.
- Recessed or superficial.
- Outdoors or indoors lighting.

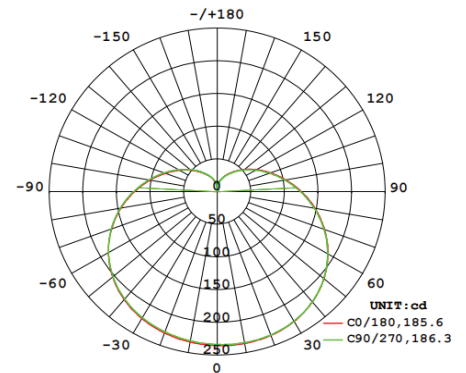

SPECIFICATIONS

Cap/Fitting:	E27
Voltage:	100-240V
Beam Angle:	180° Degree

DIMENSION

6W Size:	D-55mm H-98mm
9W Size:	D-60mm H-108mm
15W Size:	D-70mm H-126mm

SHAPE

A55
A60
A70

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
6W	3000K	540 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-01-4PK-6W-3K
6W	6500K	560 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-01-4PK-6W-6K
9W	3000K	750 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-02-4PK-9W-3K
9W	6500K	800 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-02-4PK-9W-6K
15W	3000K	1150 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-3K
15W	6500K	1300 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-6K

For more information, please visit www.HoneywellLights-fans.com