



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 2W
- 5W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Closed angle reflector.
- Recessed or superficial.
- Outdoors or indoors lighting.

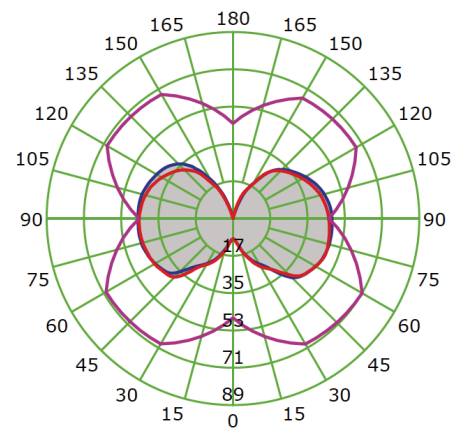

SPECIFICATIONS

Shape:	CANDLE
Cap/Fitting:	E12
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	117mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2W	2700K	250 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BE12-01-2PK-2W-27K
5W	2700K	580 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM27K
5W	6500K	600 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM6K

For more information, please visit www.HoneywellLights-fans.com