
## Honeywell | Ceiling Fans

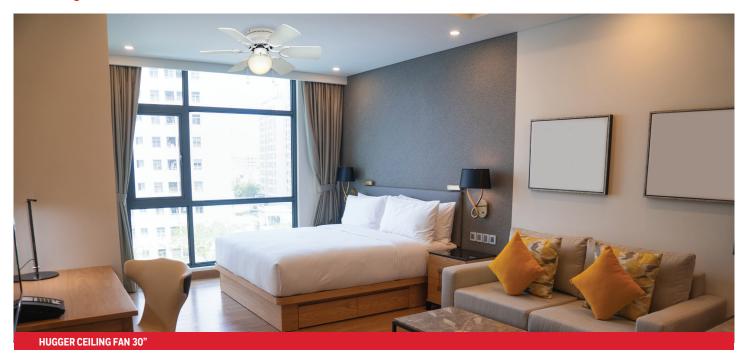

## **APPLICATION:**

- Indoor
- Small Room (up to 9x9)

## **BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



AVAILABLE OPTION	NS:		
HW-F38-WH	White		
Also Available in:	Oil Rubbed Bronze, Blad	ck, Brushed Nickel	
SPECIFICATIONS			
Watts (High):	44		
Size:	30"		
Motor Finish:	Metal		
Motor Finish:	Iron + Copper (153*13	0*7.8mm)	
ENERGY INFORMA	ENERGY INFORMATION		
Airflow (CFM) when o	pperated at high speed:	3322	
Airflow (CFM):		2325	
RPM (High):		230	
Amp (High):		0.37	
For more information	For more information, please visit www.HoneywellLights-fans.com		

ADDITIONAL INFORMATION		
Blades:	MDF Blades	
Blade Pitch:	18°	
Installation:	Hugger	
Down Rod:	No	
Max Ceiling Angle:	18°	
Lead Wire:	20"	
Reverse Airflow:	Yes	
LIGHT SOURCE		
Number of Lamps:	1	
Light Bulb Usage:	E27 Base (not included)	
Capacitor:	1.5+2.5UF/250V	
Control:	Pull chain	
Switch Housing Cap:	Included	

## Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432 Email: info@HoneywellLights-fans.com www.HoneywellLights-fans.com

The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.