



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 7W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

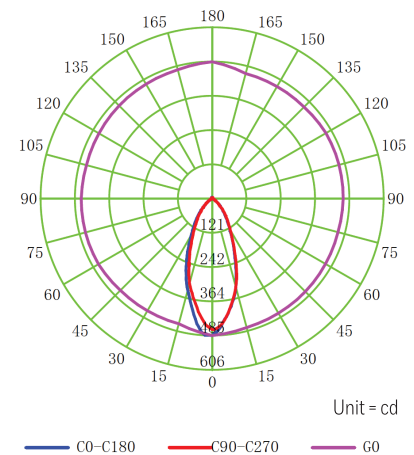

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Tilttable Angle
Finish:	White

ADDITIONAL INFORMATION

Height:	43mm
Width:	85mm
Beam Angle:	45° Degree

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
7W	3000K/4000K/6500K	610Lm / 700Lm / 660Lm	100-240V / 50-60Hz	Non Dimmable	HW-D05-7W-WH-CCT

For more information, please visit www.HoneywellLights-fans.com.

Iluminaciones Técnicas S.A.

P.O. Box 030200683 - Colon Free Zone, Panama.
Tel.: +507 441-2860 / Email: info@HoneywellLights-fans.com

©2022 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC025 | 04-2022