



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 6.5W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

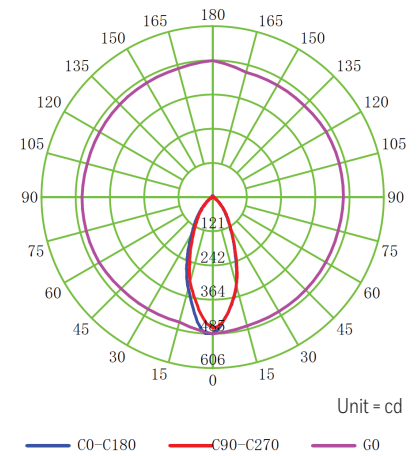

SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

ADDITIONAL INFORMATION

Height:	45mm
Length / Width:	90mm x 90mm
Beam Angle:	38° Degree

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
6.5W	3000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-WH-3K
6.5W	6500K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-WH-6K
6.5W	3000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-BK-3K
6.5W	6500K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-BK-6K

For more information, please visit www.HoneywellLights-fans.com