



LED MINI-BULB G4

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 1.8W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Closed angle reflector.
- Recessed or superficial.
- Outdoors or indoors lighting.

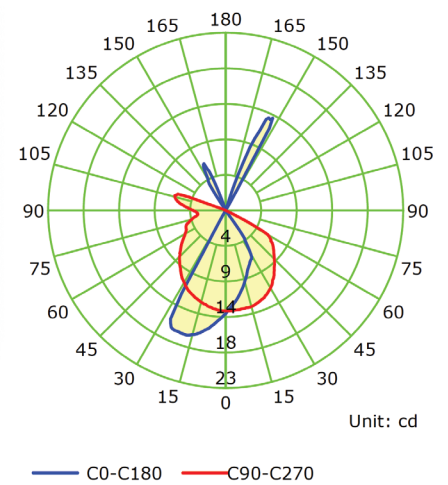

SPECIFICATIONS

Shape:	LED LIGHT BULB
Cap/Fitting:	G4
Beam Angle:	220° Degree

DIMENSIONS

Height:	10mm
Width:	38mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2W	3000K	200 Lm	12V - 50-60Hz	Non Dimmable	HW-BG4-01-3PK-1.8W-3K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2022 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC014 | 04-2022