



**LED LIGHTBULB GU10 / 2-PIN TWIST AND LOCK**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**AVAILABLE WATTAGE OPTIONS:**


- 5W
- 7W
- 5W-DIM

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Closed angle reflector.
- Recessed or superficial.
- Outdoors or indoors lighting.

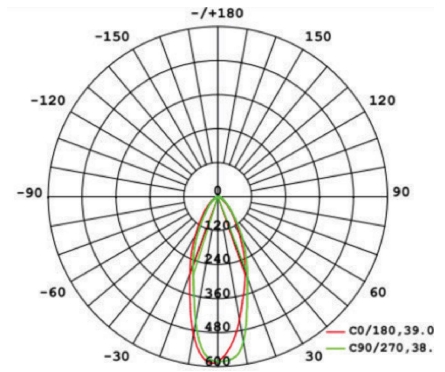

SPECIFICATIONS	
Shape:	MR16
Cap/Fitting:	GU10
Voltage:	100-240V / 100-130V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.

DIMENSION	
Height:	54 mm
Width:	50 mm

ADDITIONAL INFORMATION	
Equivalent:	50W Halogen GU10

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
5W	3000K	410 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-3K	
5W	4000K	470 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-4K	
5W	6500K	470 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-6K	
7W	3000K	640 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-3K	
7W	4000K	650 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-4K	
7W	6500K	650 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-6K	
5W	3000K	460 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM3K	
5W	4000K	450 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM4K	
5W	6500K	460 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM6K	

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)