



LED LIGHTBULB MR16 / 2-PIN

LUMINOUS INTENSITY DISTRIBUTION CURVE



### AVAILABLE WATTAGE OPTIONS:


- 5W
- 5W-DIM

### BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

### APPLICATION:

- Closed angle reflector.
- Recessed or superficial.
- Outdoors or indoors lighting.

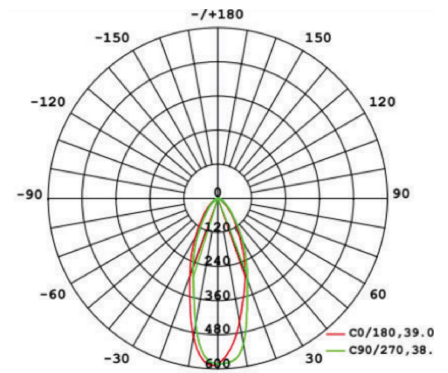

### SPECIFICATIONS

Shape:	MR16
Cap/Fitting:	GU5.3
Voltage:	100-240V / 100-130V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.

### DIMENSION

Height:	48 mm
Width:	50 mm

### ADDITIONAL INFORMATION

Equivalent:	50W Halogen MR16
-------------	------------------

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-3K
5W	4000K	430 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-4K
5W	6500K	430 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-6K
5W	3000K	420 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM3K
5W	4000K	420 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM4K
5W	6500K	460 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

### Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2022 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC002 | 01-2023