



LED LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 5W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

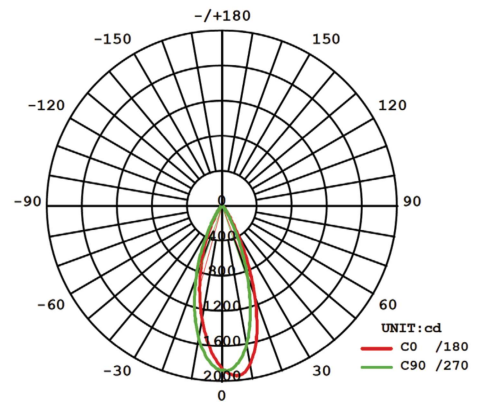

SPECIFICATIONS

Shape:	PAR20
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS

Height:	87mm
Width:	63mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000k	590 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-3K
5W	6500k	600 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-6K

For more information, please visit www.HoneywellLights-fans.com