



LED LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



### AVAILABLE WATTAGE OPTIONS:


- 12W

### BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

### APPLICATION:

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

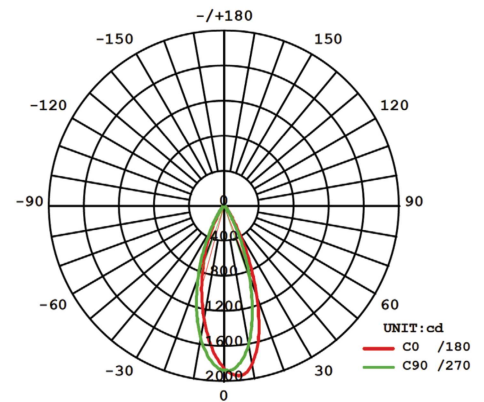

### SPECIFICATIONS

Shape:	PAR38
Cap/Fitting:	E27
Beam Angle:	40°

### DIMENSIONS

Height:	135mm
Width:	116mm

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
12W	3000K	1150 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP38-01-12W-3K
12W	6500K	1300 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP38-01-12W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

### Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2022 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC021 | 01-2023