



LED RECESSED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 3W
- 6W
- 12W
- 18W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Office Building.
- Retail.
- Indoors.

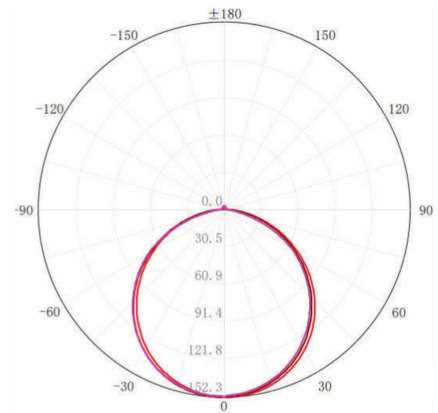

SPECIFICATIONS

Shape: Round LED Lamp
 Cap/Fitting: Recessed Ceiling
 Finish: White

DIMENSION

Volt: 100-240V / 50-60Hz
 Beam Angle: 110°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
3W	3000K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-3K
3W	6500K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-6K
6W	3000K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-3K
6W	6500K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-6K
12W	3000K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-3K
12W	6500K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-6K
18W	3000K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-3K
18W	6500K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-6K

For more information, please visit www.HoneywellLights-fans.com