


LED RECESSED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch

Only to 18W-CCT and 24W-CCT models.



AVAILABLE WATTAGE OPTIONS:


- 6W
- 18W
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Office Building.
- Retail.
- Indoors.

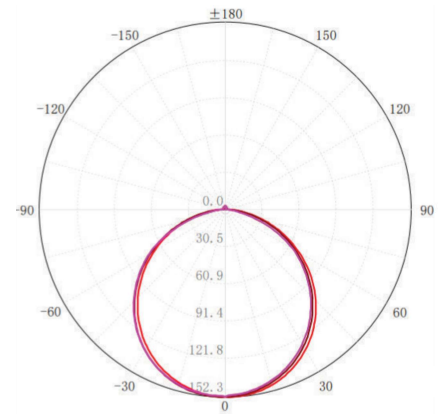

SPECIFICATIONS

Shape:	Square LED Lamp
Cap/Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-240V / 50-60Hz
Beam Angle:	110°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K	390 Lm	120mm x 120mm x 18mm	Non Dimmable	HW-P02-S6W-3K
6W	6000K	390 Lm	120mm x 120mm x 18mm	Non Dimmable	HW-P02-S6W-6K
18W	3000K	1540 Lm	220mm x 220mm x 18mm	Non Dimmable	HW-P02-S18W-3K
18W	6500K	1540 Lm	220mm x 220mm x 18mm	Non Dimmable	HW-P02-S18W-6K
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	220mm x 220mm x 18mm	Non Dimmable	HW-P06-S18W-CCT
24W	3000K/4000K/6500K	1730 Lm / 1900 Lm / 1730 Lm	290mm x 290mm x 18mm	Non Dimmable	HW-P06-S24W-CCT

For more information, please visit www.HoneywellLights-fans.com