



SURFACE MOUNTED LED PANEL

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 18W
- 24W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Office Building.
- Retail.
- Indoors.

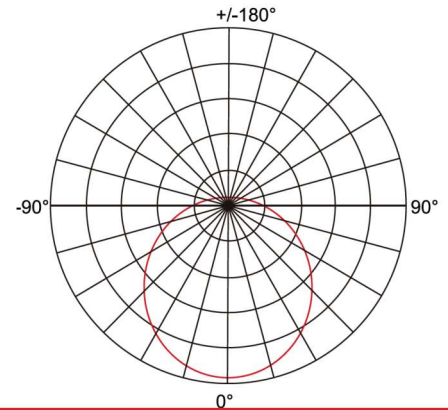

SPECIFICATIONS

Shape:	Square LED Lamp
Cap/Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-240V / 50-60Hz
Beam Angle:	110°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
18W	6500K	1540 Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-6K
18W	3000K	1540 Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-3K
24W	3000K	1400 Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-3K
24W	6500K	1400 Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-6K

For more information, please visit www.HoneywellLights-fans.com