


SURFACE MOUNTED LED PANEL

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch



AVAILABLE WATTAGE OPTIONS:


- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.

APPLICATION:

- Office Building.
- Retail.
- Indoors.

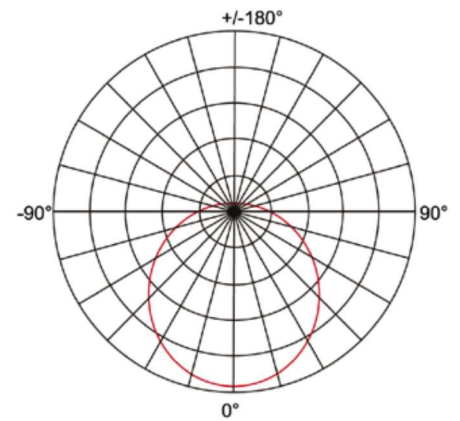

SPECIFICATIONS

Shape: Round LED Lamp
 Cap/Fitting: Surface Mounted Ceiling
 Finish: White

ADDITIONAL INFORMATION

Volt: 100-240V / 50-60Hz
 Beam Angle: 110°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	330 Lm / 440 Lm / 330 Lm	D-112mm H-28mm	Non Dimmable	HW-P07-R6W-CCT
12W	3000K/4000K/6500K	770 Lm / 880 Lm / 770 Lm	D-160mm H-28mm	Non Dimmable	HW-P07-R12W-CCT
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	D-210mm H-28mm	Non Dimmable	HW-P07-R18W-CCT
24W	3000K/4000K/6500K	1730 Lm / 1900 Lm / 1730 Lm	D-282mm H-28mm	Non Dimmable	HW-P07-R24W-CCT

For more information, please visit www.HoneywellLights-fans.com