


LED PANEL LIGHT 2X4

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch
for Model: HW-P2X4-01-60W-CCT




AVAILABLE WATTAGE OPTIONS:

- 60W-CCT
- 60W-65K

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- No heat or UV emissions.
- Design flexibility.
- Long lifespan.
- General lighting for limited build-in height.
- Instant lighting and the ability to withstand frequent switching.

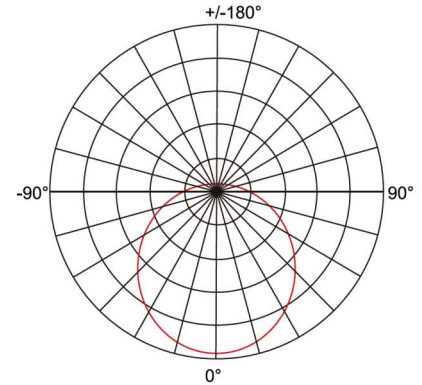

SPECIFICATIONS

Shape:	LED BACKLIT
Cap/Fitting:	2X4
Finish:	Aluminium Frame, PS Diffuser

DIMENSIONS

Volt:	100-277V / 50-60Hz
Beam Angle:	120° Degree
Dimmable / Non Dimmable:	Non Dimmable

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Model
60W	3000K/4000K/6500K	5940 Lm / 6640 Lm / 5930 Lm	1200mm x 600mm x 30mm	HW-P2X4-01-60W-CCT
60W	6500K	5400 Lm	1200mm x 600mm x 30mm	HW-P2X4-02-60W-60K

For more information, please visit www.HoneywellLights-fans.com