




HW-7N108-BF-BK

420W~440W

MONOCRYSTALLINE MODULE

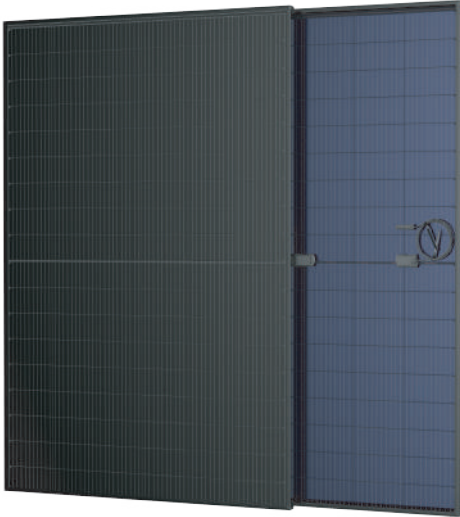

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 22.53% by using innovative N-Type Topcon cell technology.
- Extremely low LID (light induced degradation) and low annual power degradation ensure higher energy yield during the module's lifetime.
- Low temperature coefficient and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.
- Aesthetically appealing design with black back sheet and frame

CERTIFICATIONS


- IEC 61215, IEC 61730, CE
- ISO 9001:2015: Quality management system
- ISO 14001:2015: Environmental management system
- ISO 45001:2018: Occupational health and safety management system



SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty

Passionately
committed to
delivering innovative
energy solutions

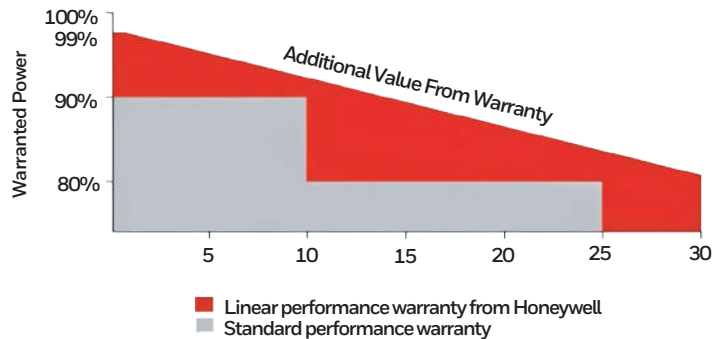

ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P _{max})	420W	425W	430W	435W	440W
Open Circuit Voltage (V _{oc})	38.0V	38.2V	38.4V	38.6V	38.8V
Short Circuit Current (I _{sc})	13.94A	14.00A	14.06A	14.12A	14.18A
Voltage at Maximum Power (V _{mp})	31.8V	32.0V	32.2V	32.4V	32.6V
Current at Maximum Power (I _{mp})	13.21A	13.29A	13.36A	13.43A	13.50A
Module Efficiency (%)	21.51	21.76	22.02	22.28	22.53
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1000V DC/1500V DC				
Fire Resistance Rating	Class C				
Maximum Series Fuse Rating	30A				

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5; Tolerance of P_{max}: ±3%; Measurement Tolerance: ±3%

ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P _{max})	316W	320W	324W	328W	331W
Open Circuit Voltage (V _{oc})	36.1V	36.3V	36.5V	36.7V	36.9V
Short Circuit Current (I _{sc})	11.29A	11.34A	11.39A	11.44A	11.49A
Voltage at Maximum Power (V _{mp})	29.9V	30.1V	30.3V	30.5V	30.7V
Current at Maximum Power (I _{mp})	10.57A	10.64A	10.70A	10.75A	10.81A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

ELECTRICAL CHARACTERISTICS WITH DIFFERENT REAR SIDE POWER GAIN (EXAMPLE: HW-7N108-BF-BK-440W)

Power Gain	P _{max}	V _{oc}	I _{sc}	V _{mp}	I _{mp}
10 %	484W	38.8V	15.71A	32.6V	14.85A
15 %	506W	38.8V	16.41A	32.6V	15.53A
20 %	528W	38.8V	17.14A	32.6V	16.20A
25 %	550W	38.8V	17.85A	32.6V	16.88A
30 %	572W	38.8V	18.55A	32.6V	17.55A

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline N-type 182x91mm
Number of cells	108 (6x18)
Module dimensions	1722x1134x30mm
Weight	24 kg
Front cover	2mm tempered glass with AR coating / 2mm Tempered glass
Frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cable	4mm ² , Portrait: 300mm: Landscape: 1200mm
Connector	MC4 or MC4 compatible

TEMPERATURE CHARACTERISTICS


Nominal Operating Cell Temperature (NOCT)	43°C±2°C
Temperature Coefficients of P _{max}	-0.30%/°C
Temperature Coefficients of V _{OC}	-0.25%/°C
Temperature Coefficients of I _{SC}	0.045%/°C

PACKAGING


Standard packaging	36 pcs/pallet
Module quantity per 20' container	216 pcs
Module quantity per 40' container	936 pcs (HQ)

ENGINEERING DRAWINGS


Unit: mm

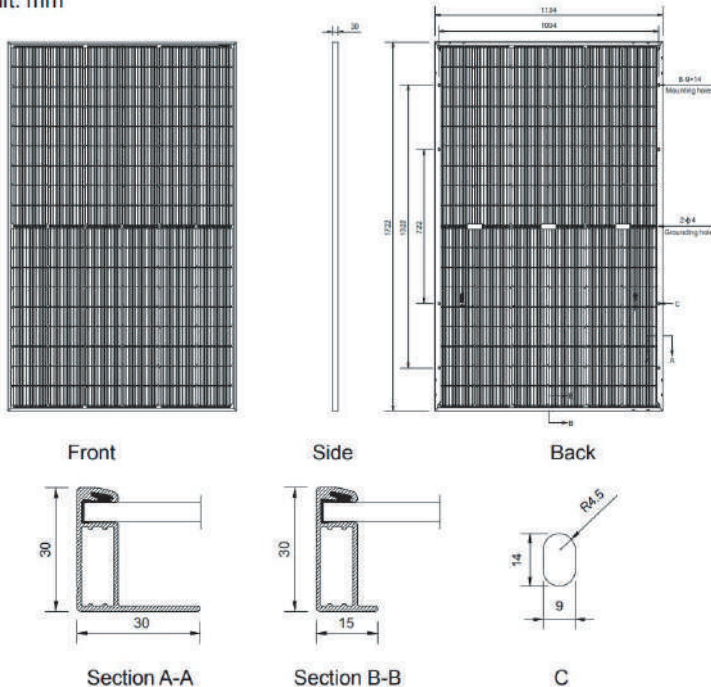

IV CURVES

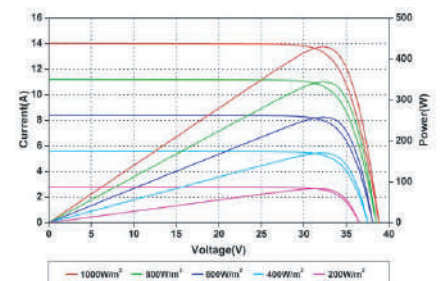

Current-Voltage and Power-Voltage Curves at Different Irradiances

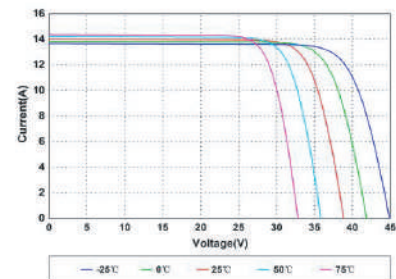

Current-Voltage Curves at Different Temperatures