


## HW-7N144-MF

## 560W~590W

### MONOCRYSTALLINE MODULE

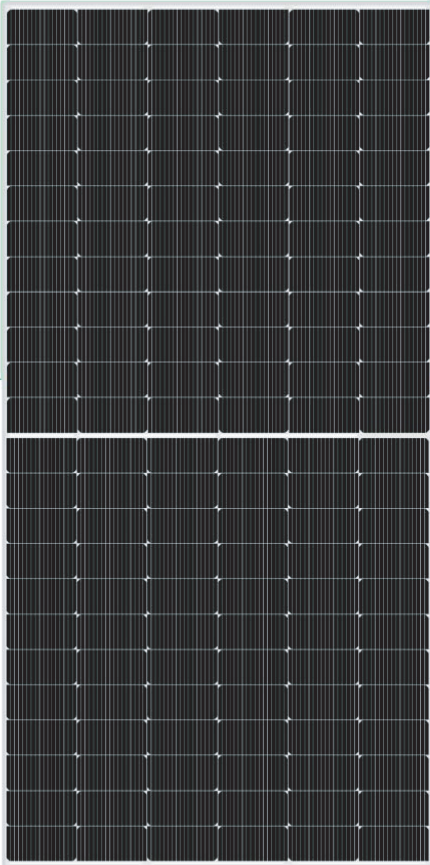

Passionately

committed to

delivering innovative

energy solution

### ADVANCED PERFORMANCE & PROVEN ADVANTAGES


- High module conversion efficiency up to 22.83% by using innovative N-Type Topcon cell technology.
- Extremely low LID (light induced degradation) and low annual power degradation ensure higher energy yield during the module's lifetime.
- Low temperature coefficient and excellent performance under high temperature and low light conditions.
- Robust aluminum frame ensures the modules to withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- High reliability against extreme environmental conditions (passing salt mist, ammonia and hail tests).
- Potential induced degradation (PID) resistance.

### CERTIFICATIONS

- IEC 61215, IEC 61730, CE
- ISO 9001:2015: Quality management system
- ISO 14001:2015: Environmental managements system
- ISO 45001:2018: Occupational health and safety management system

### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty

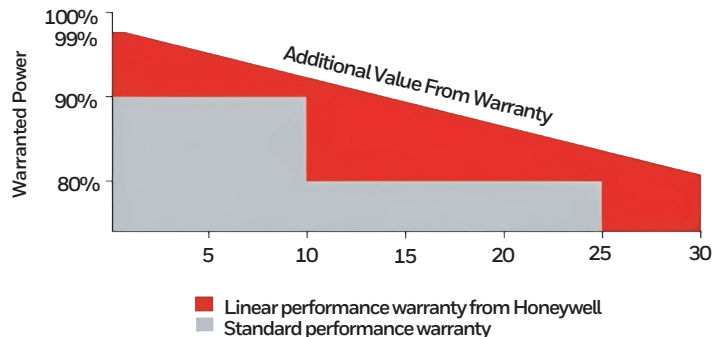

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	560W	565W	570W	575W	580W	585W	590W
Open Circuit Voltage (V <sub>oc</sub> )	50.4 V	50.6 V	50.8 V	51.0 V	51.2 V	51.4 V	51.6 V
Short Circuit Current (I <sub>sc</sub> )	14.04 A	14.09 A	14.14 A	14.19 A	14.24 A	14.29 A	14.34 A
Voltage at Maximum Power (V <sub>mp</sub> )	42.2 V	42.4 V	42.6 V	42.8 V	43.0 V	43.2 V	43.4 V
Current at Maximum Power (I <sub>mp</sub> )	13.28 A	13.33 A	13.39 A	13.44 A	13.49 A	13.54 A	13.59 A
Module Efficiency (%)	21.67	21.86	22.06	22.25	22.44	22.64	22.83
Operating Temperature	-40°C to +85°C						
Maximum System Voltage	1000V DC/1500V DC						
Fire Resistance Rating	Class C						
Maximum Series Fuse Rating	25 A						

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P <sub>max</sub> )	421W	425W	429W	433W	437W	441W	445W
Open Circuit Voltage (V <sub>oc</sub> )	47.9V	48.1V	48.3V	48.5V	48.7V	48.9V	49.1V
Short Circuit Current (I <sub>sc</sub> )	11.37 A	11.41 A	11.45 A	11.49 A	11.53 A	11.57 A	11.61 A
Voltage at Maximum Power (V <sub>mp</sub> )	39.7 V	39.9 V	40.1 V	40.3 V	40.5 V	40.7 V	40.9 V
Current at Maximum Power (I <sub>mp</sub> )	10.61 A	10.66 A	10.70 A	10.75 A	10.80 A	10.85 A	10.90 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline N-type 182*91mm
Number of cells	144 (6x24)
Module dimensions	2278x1134x30mm (89.72x44.65x1.18 inches)
Weight	27.5kg (60.6lbs)
Front/Back Glass	3.2mm (0.13 inches) tempered glass whit AR coating
Frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , Portrait: 300mm: Landscape: 1300mm Landscape: 1300mm (51.18 inches)
Connector	MC4 or MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	43°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of VOC	-0.25%/°C
Temperature Coefficients of ISC	0.045%/°C


## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)


## ENGINEERING DRAWINGS

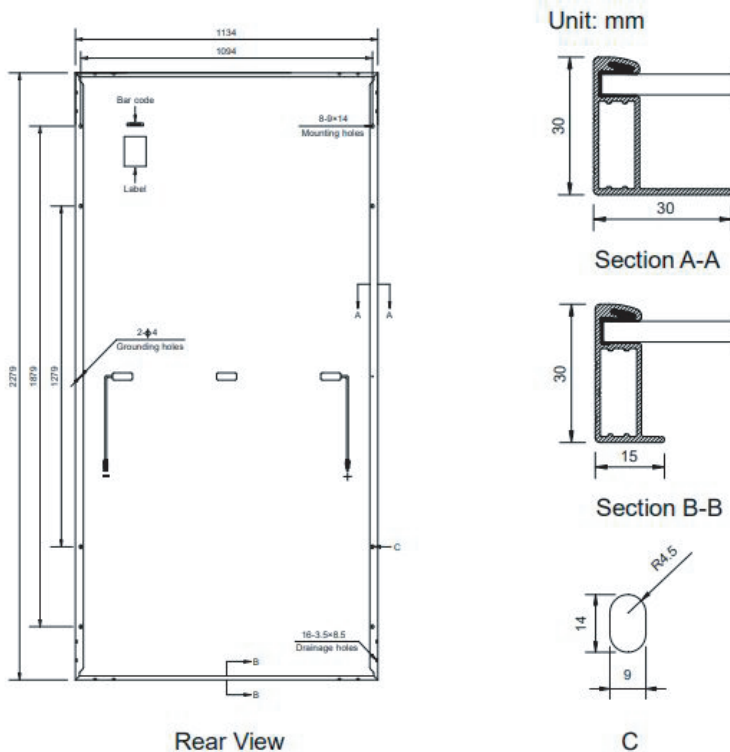

## IV CURVES

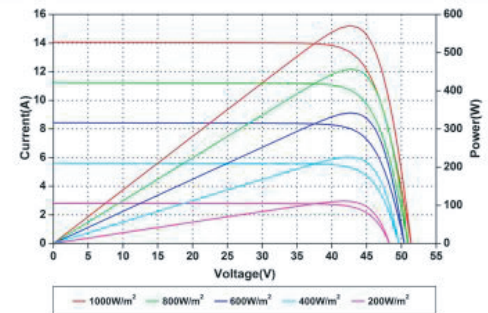

Current-Voltage and Power-Voltage Curves at Different Irradiances

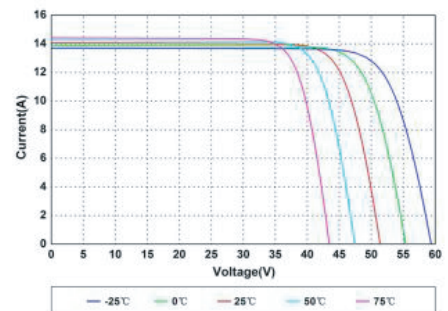

Current-Voltage Curves at Different Temperatures

Specifications in this datasheet are subject to change without prior notice.