

LED PANEL LIGHT

HW-P1X4-05-40W-CCT

Backlit Panel Certified, with high uniform lighting performance. CCT selectable Switch.



Indoor

FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency
- THD > 20%
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



LED



Life Span
50,000 H



Multi Color
Temperature
(CCT)





Easy
Installation



Save Money

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	White	Input Power	40W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	4000, 4700, 4450 Lm	Dimensions (LxWxH)	295x1195x34 mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117 Lm/W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50 000 Hrs	Operation Temperature	0°C to +40°C		


DIMENSIONS

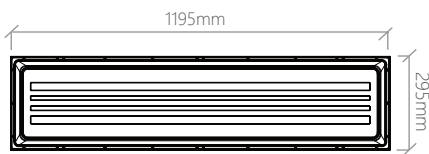

This panel can be installed in two different ways: hanging or recessed.



(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

