


LED PANEL LIGHT

HW-P2X2-05-40W-CCT

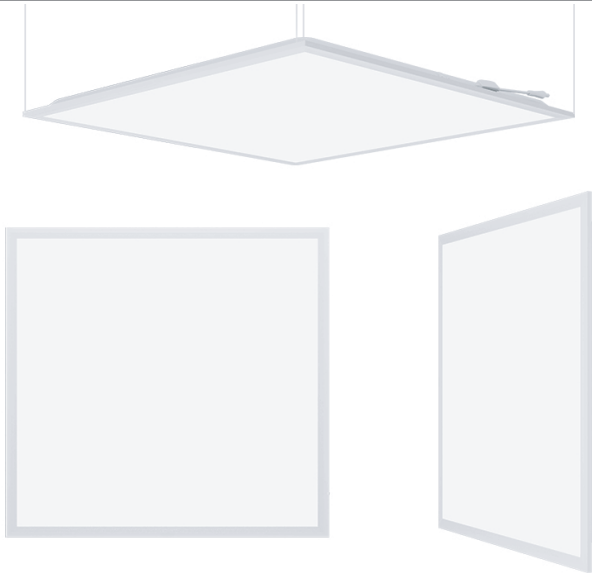

Backlit Panel Certified, with high uniform lighting performance. CCT selectable switch.

FEATURES

- Backlit design without LGP, No risk of yellowing.
- THD > 20%
- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas

CE LED IP 20



Multi Color Temperature (CCT)



Easy Installation




Save Money



Life Span 50,000 H

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	White	Input Power	40W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	4100, 4700, 4500Lm	Dimensions (LxWxH)	595x595x34mm	Frequency	50-60Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117Lm/W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50 000 Hrs	Operation Temperature	00°C to +40°C		

DIMENSIONS

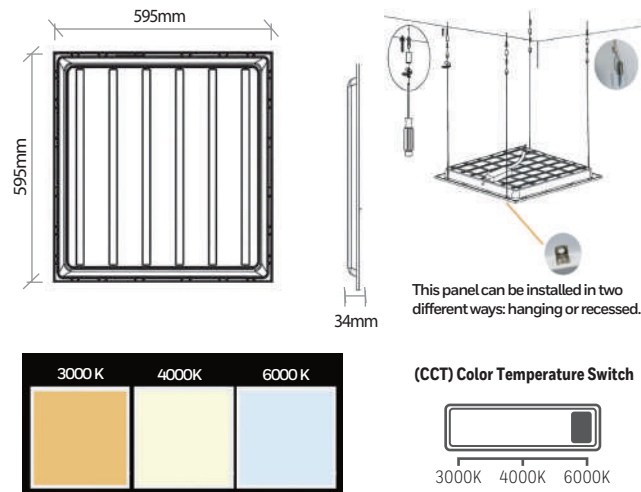

LUMINOUS INTENSITY DISTRIBUTION

