

LED PANEL LIGHT

HW-P2X4-04-PS-CCT-UL

Backlit Panel UL Certified, with high uniform lighting performance. CCT selectable switch.

FEATURES

- Backlit design without LGP, No risk of yellowing.
- ANSI C82.77-2002 Surge Protector
- THD < 20%
- Energy efficiency
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3500K, 4000K, 5000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas

Indoor



RoHS




Multi Color Temperature (CCT)



Multi Wattage Switchable



| OPTICAL DATA | | PHYSICAL DATA | | ELECTRICAL DATA | |
|-------------------------|---------------------|-----------------------|---------------------|-------------------|---------------|
| Color Temperature (CCT) | 3500K, 4000K, 5000K | Finish | White | Input Power | 30W, 35W, 45W |
| CCT Switchable | YES | Protection Level - IP | IP20 | Power Switchable | YES |
| Luminous Flux | 4260/ 4390/6090 Lm | Dimensions (LxWxH) | 1214x604x38mm | Operating Voltage | 120-277 V |
| Type of Distribution | Direct Symmetrical | Type of Installation | Recessed or Hanging | Frequency | 50-60 Hz |
| Beam Angle | 120° | Body Frame | Aluminium | Power Rating | >0.90 |
| Efficiency | 135 Lm/W | Optical Material | Diffuser PC | CRI | 80 |
| Life Span | 50000 Hrs | Operation Temperature | -20°C to +40°C | Dimmable | 0-10V |

DIMENSIONS

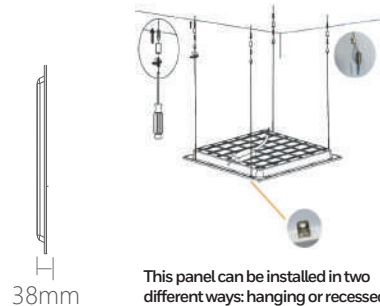


This panel can be installed in two different ways: hanging or recessed.

LUMINOUS INTENSITY DISTRIBUTION

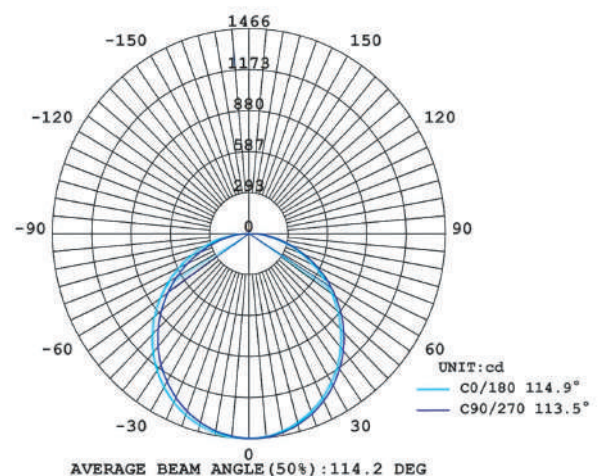

(CCT) Color Temperature Switch



Power Selectable Switch

