LED TRI-PROOF LIGHT

HW-TRI-02-36W-65K

Dust-tight LED luminaire, clipless design, for environments with high humidity and dirt, such as parking lots, industrial facilities, food processing plants or kitchens. with two mounting options, surface or suspended from the ceiling.
Power: 36W
Cool Day Light

FEATURES

- Built in high luminous effieciency LED Chip and Driver.
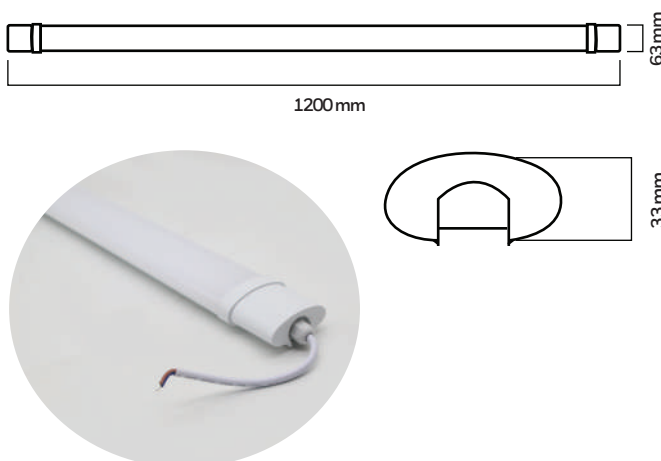- Fast connection
- IP65
- Water Proof

APPLICATION

- Residential Areas
- Sidewalks
- Parks
- Schools
- And others

Indoor

CE | LED | Indoor | Water Proof | $ Save Money | Easy Installation | Eco Friendly

OPTICAL DATA

Color Temperature (CCT)	6500K
Luminous Flux	4700 lm
Beam Angle	120°
Type of Distribution	Direct Symmetrical

PHYSICAL DATA

Finish	White
Protection Level – IP/IK	IP 65/IK07
Dimensions (LxWxH)	1200 X 63 X 33mm
Type of Installation	Ceiling Mountable
Body Frame	PC
Optical Material	Diffuser PC
Operation Temperature	–20°C to +40°C

ELECTRICAL DATA

Input Power	36W
Power Switchable	NO
Operating Voltage	100–277V
Frequency	50–60 Hz
Power Rating	> 0.50
CRI	80
Dimmable	Non Dimmable

DIMENSIONS

63 mm
1200 mm
33 mm

LUMINOUS INTENSITY DISTRIBUTION

Iluminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

SPEC000 |
SPEC000 | 0203