



LED LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 5W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

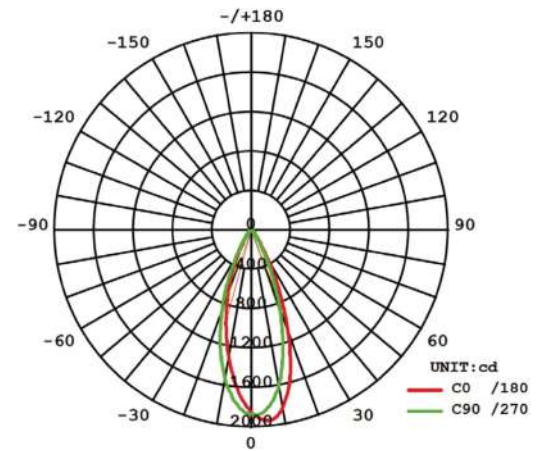

SPECIFICATIONS

| | |
|--------------|-------|
| Shape: | PAR20 |
| Cap/Fitting: | E27 |
| Beam Angle: | 40° |

DIMENSIONS

| | |
|---------|------|
| Height: | 87mm |
| Width: | 63mm |

AVAILABLE WATTAGE OPTIONS

| Power | Tone | Brightness | Volt | Dimmable / Non Dimmable | Model |
|-------|-------|------------|--------------------|-------------------------|------------------|
| 5W | 3000k | 500Lm | 100-277V - 50-60Hz | Non Dimmable | HW-BP20-01-5W-3K |
| 5W | 6500k | 500Lm | 100-277V - 50-60Hz | Non Dimmable | HW-BP20-01-5W-6K |

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2024 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC019 | 01-2024