



**LED PAR 30 BULB**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**AVAILABLE WATTAGE OPTIONS:**


- 30W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Indoors lighting.
- Recessed track lighting.

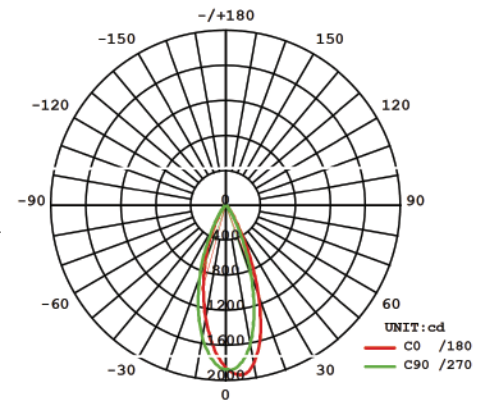

**SPECIFICATIONS**

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	24°
Certification:	CE

**DIMENSIONS**

Height:	128mm
Width:	95mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
30W	3000K	3000 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-02-30W-3K
30W	4000K	3100 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-02-30W-4K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2024 ILUMINACIONES TECNICAS SA. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas SA.

SPEC020 | 01-2024