



LED PAR 38 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 15W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Indoors lighting.
- Recessed track lighting.

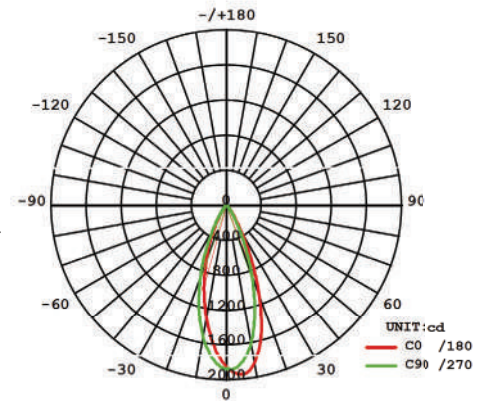

SPECIFICATIONS

Shape:	PAR38
Cap/Fitting:	E27
Beam Angle:	40°
Certification:	CE

DIMENSIONS

Height:	135mm
Diameter:	121mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
15W	3000K	1450 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP38-01-15W-3K
15W	6500K	1450 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP38-01-15W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2024 ILUMINACIONES TECNICAS SA. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas SA.