



LED MINI-BULB G9

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 2.5W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

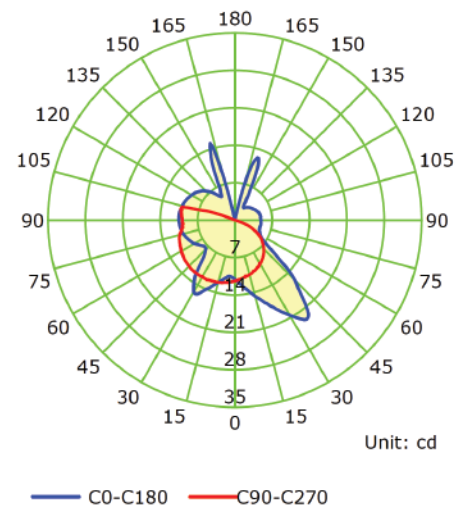

**SPECIFICATIONS**

Shape:	LED LIGHT BULB
Cap/Fitting:	G9
Beam Angle:	220° Degree

**DIMENSIONS**

Height:	48.5mm
Width:	16mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2.5W	3000K	220 lm	100-130V - 50-60Hz	Non Dimmable	HW-BG9-01-3PK-2.5W-3K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS SA. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas SA.