



LED Highbay Lightbulb

Luminous Intensity Distribution Curve



**AVAILABLE WATTAGE OPTIONS:**


- 50W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Widely used for indoor and commercial lighting.
- Wall mount fixtures.
- HID retrofit replacement lamps.
- Garages, warehouses and work-sites.

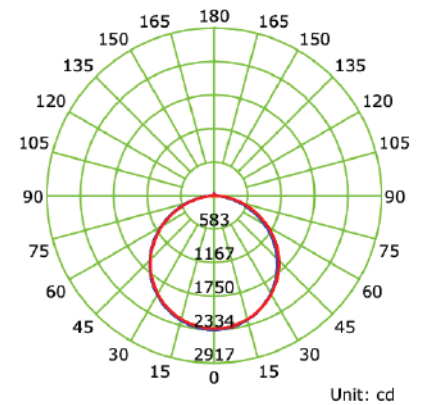

— C0-C180 — C90-C270

**SPECIFICATIONS**

Shape:	LED BULB T140
Cap/Fitting:	E27
Bulb Finish:	White

**ADDITIONAL INFORMATION**

Height:	220 mm
Width:	140 mm
Beam Angle:	180°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
50W	6500K	4700Lm	100-240V - 50-60Hz	Non Dimmable	HW-BLED-01-50W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)