



# Honeywell

 **ilumitec**  
INTERNATIONAL

AUTHORIZED LICENSEE

**CENTRAL AMERICA  
AND CARIBBEAN**

**LED LIGHT BULBS**  
**LED DOWNLIGHTS**  
**COMMERCIAL LIGHTS**  
**CEILING FANS**  
**EXTENSION CORDS**  
**SURGE PROTECTORS**  
**SOLAR LIGHTING**  
**SOLAR PANELS**

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Iluminaciones Técnicas S.A.**  
Panama Headquarters 1 (888) 502-8432  
Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.  
The Honeywell trademark is used under license from Honeywell International Inc.  
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.



# Honeywell

## LED LIGHT BULB 2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 5W-DIM

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

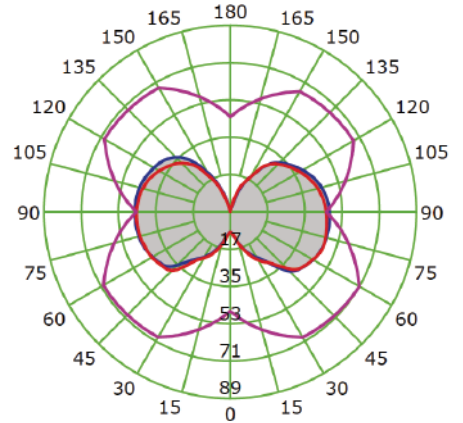

SPECIFICATIONS	
Shape:	CANDLE
Cap/Fitting:	E14
Bulb Finish:	Transparent

ADDITIONAL INFORMATION	
Height:	118mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
5W	2700K	600 lm	100-130V - 50-60Hz	Dimmable	HW-BE14-01-2PK-5W-DIM27K	

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC001 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 5W-DIM

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

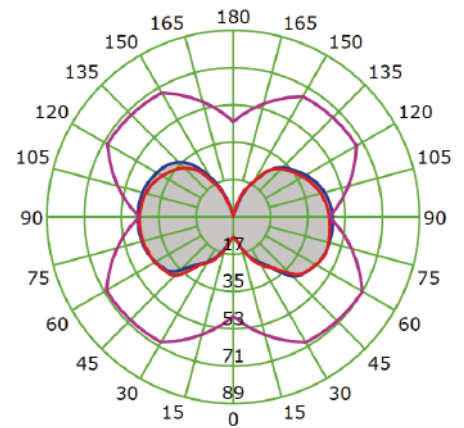

**SPECIFICATIONS**

Shape:	CANDLE
Cap/Fitting:	E27
Bulb Finish:	Transparent

**ADDITIONAL INFORMATION**

Height:	113mm
Width:	35mm
Beam Angle:	320°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	2700K	600 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-03-2PK-5W-DIM27K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 2W
- 5W-DIM

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

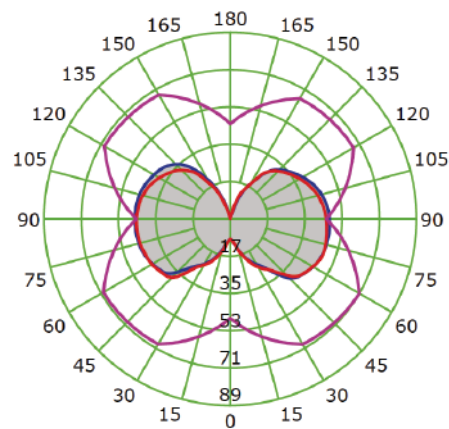

**SPECIFICATIONS**

Shape: CANDLE

Cap/Fitting: E12

Bulb Finish: Transparent

**ADDITIONAL INFORMATION**

Height: 117mm

Width: 35mm

Beam Angle: 320°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2W	2700K	292 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BE12-01-2PK-2W-27K
5W	2700K	650 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM27K
5W	6500K	739 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 8W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

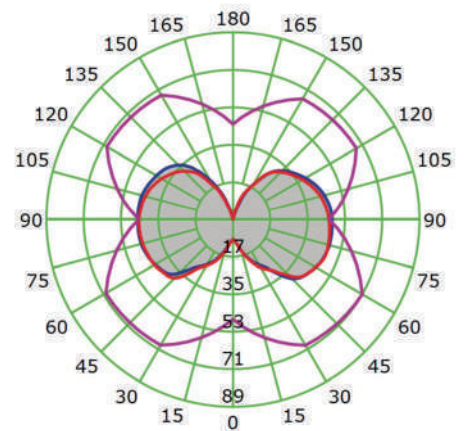

**SPECIFICATIONS**

Shape:	A60
Cap/Fitting:	E27
Bulb Finish:	Transparent

**ADDITIONAL INFORMATION**

Height:	107mm
Width:	60mm
Beam Angle:	320°

**AVAILABLE WATTAGE OPTIONS**


Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1000 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BA19-04-8W-27K
8W	6500K	1055 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BA19-04-8W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE

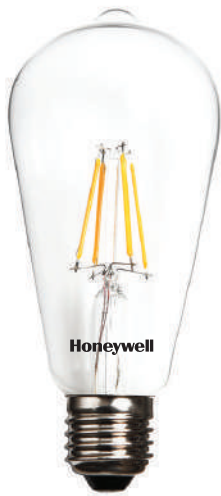


**AVAILABLE WATTAGE OPTIONS:**

- 4W-DIM

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

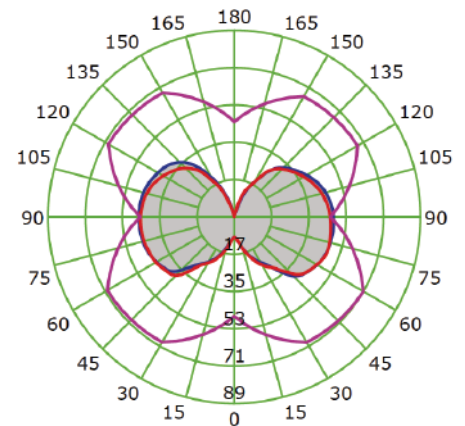

**SPECIFICATIONS**

Shape:	ST64
Cap/Fitting:	E27
Bulb Finish:	Transparent

**DIMENSIONS**

Height:	138mm
Width:	64mm
Beam Angle:	320°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
4W	2700K	578 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-04-4W-DIM27K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 8W-DIM

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

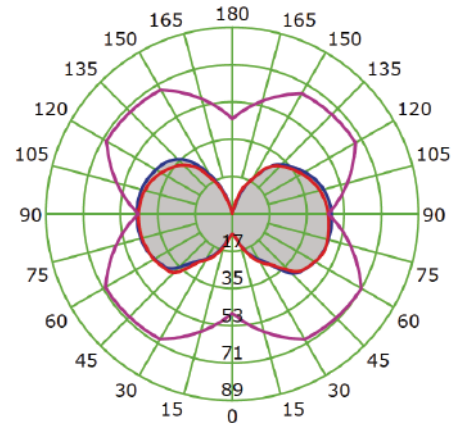

**SPECIFICATIONS**

Shape:	ST64
Cap/Fitting:	E27
Bulb Finish:	Amber

**DIMENSIONS**

Height:	138mm
Width:	64mm
Beam Angle:	320°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1055 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-05-8W-DIM27K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 8W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

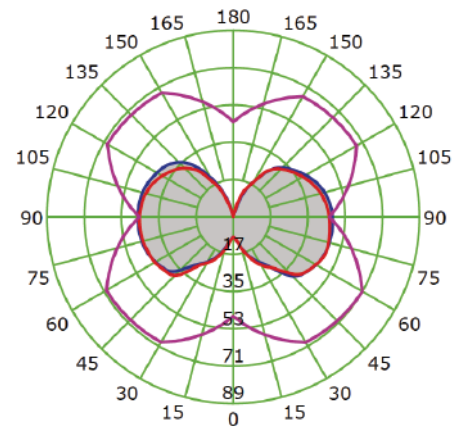

**SPECIFICATIONS**

Shape:	G125
Cap/Fitting:	E27
Bulb Finish:	Transparent

**ADDITIONAL INFORMATION**

Height:	173mm
Width:	125mm
Beam Angle:	320°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1055 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-06-8W-DIM27K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 8W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

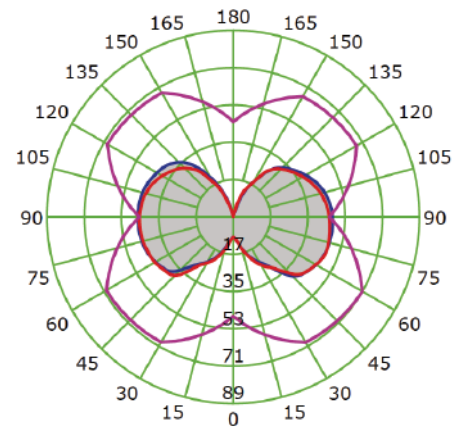

**SPECIFICATIONS**

Shape:	G125
Cap/Fitting:	E27
Bulb Finish:	Amber

**ADDITIONAL INFORMATION**

Height:	173mm
Width:	125mm
Beam Angle:	320°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1045 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-07-8W-DIM27K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED FILAMENT LIGHT BULB


LUMINOUS INTENSITY DISTRIBUTION CURVE

### AVAILABLE WATTAGE OPTIONS:

- 5W

### BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

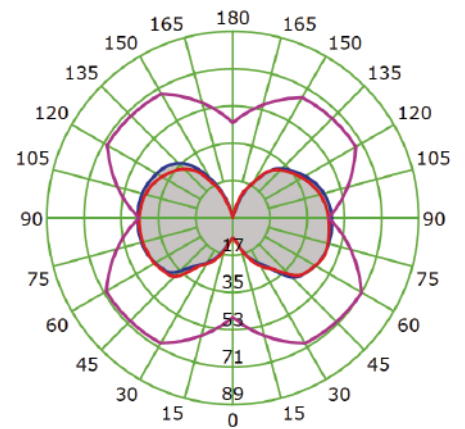

### SPECIFICATIONS

Shape:	G45
Cap/Fitting:	E27
Bulb Finish:	Transparent

### ADDITIONAL INFORMATION

Height:	77mm
Width:	45mm
Beam Angle:	320°

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	2700K	628 Lm	100-130V - 50-60Hz	Dimmable	HW-BG45-01-2PK-5W-DIM27K
5W	6500K	700 Lm	100-130V - 50-60Hz	Dimmable	HW-BG45-01-2PK-5W-DIM6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED HIGHBAY LIGHTBULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



**AVAILABLE WATTAGE OPTIONS:**


- 50W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Widely used for indoor and commercial lighting.
- Wall mount fixtures.
- HID retrofit replacement lamps.
- Garages, warehouses and work-sites.

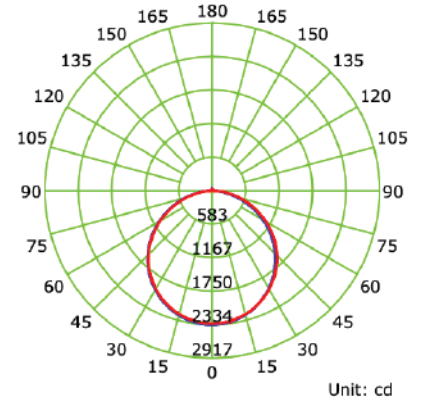

— C0-C180 — C90-C270

**SPECIFICATIONS**

Shape:	LED BULB T140
Cap/Fitting:	E27
Bulb Finish:	White


**ADDITIONAL INFORMATION**

Height:	220 mm
Width:	140 mm
Beam Angle:	180°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
50W	6500K	4700Lm	100-240V - 50-60Hz	Non Dimmable	HW-BLED-01-50W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

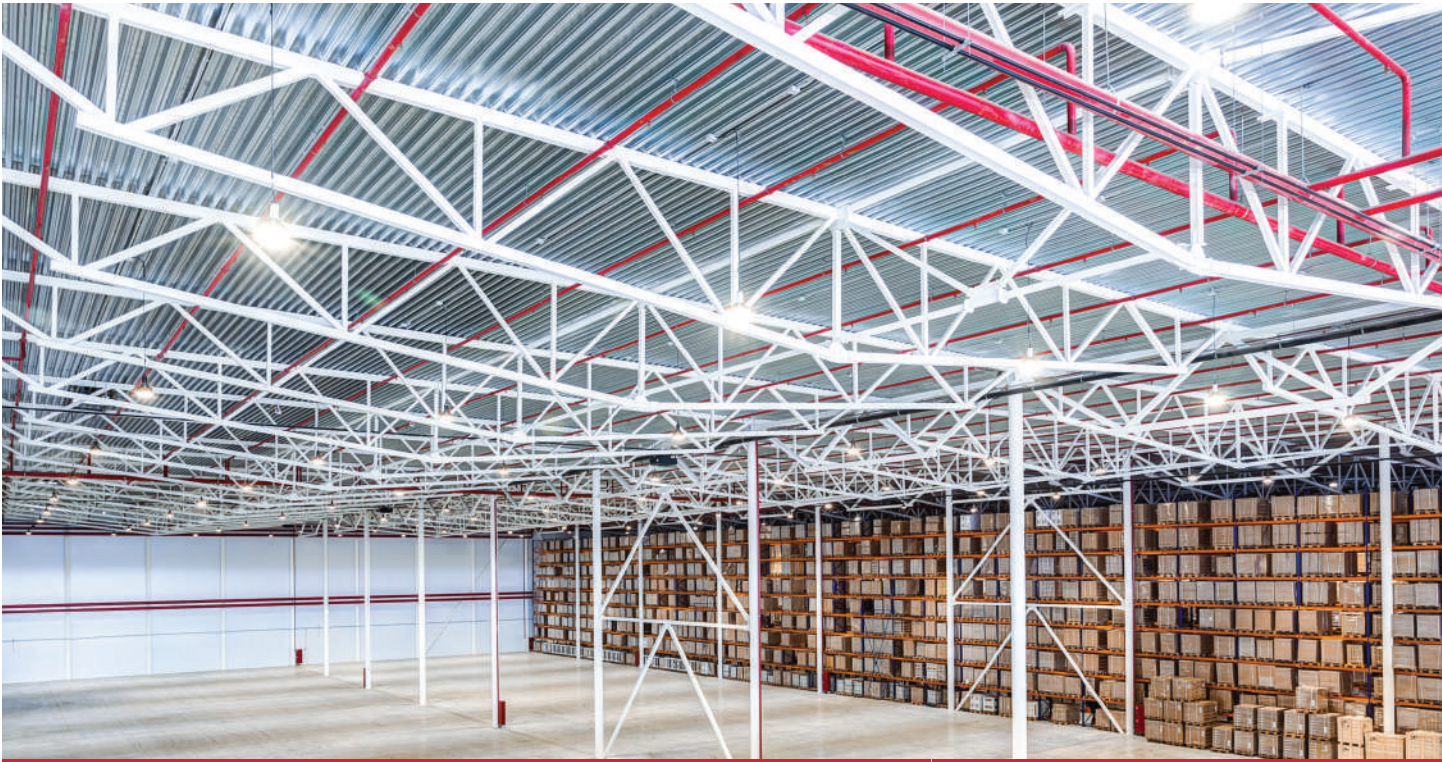

LED HIGH POWER LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



**AVAILABLE WATTAGE OPTIONS:**


- 100W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Widely used for indoor and commercial lighting.
- Wall mount fixtures.
- HID retrofit replacement lamps.
- Garages, warehouses and work-sites.

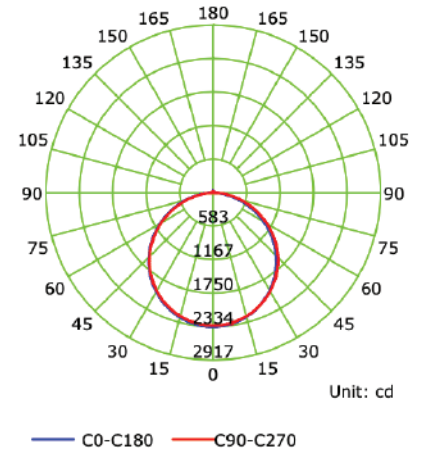

**SPECIFICATIONS**

Shape:	LED BULB T150
Cap/Fitting:	E27
Bulb Finish:	Alluminium Housing

**ADDITIONAL INFORMATION**

Height:	270mm
Width:	150mm
Beam Angle:	180°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
100W	6500K	9000 lm	100-277V - 50-60Hz	Non Dimmable	HW-BLED-02-100W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED LIGHTBULB A19

LUMINOUS INTENSITY DISTRIBUTION CURVE




### AVAILABLE WATTAGE OPTIONS:

- 6W
- 9W
- 15W

### BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.



### SPECIFICATIONS

Cap/Fitting:	E27
Voltage:	100-240V
Beam Angle:	180° Degree
Certification:	CE

### DIMENSION


6W Size:	D-55mm H-98mm	A55
9W Size:	D-60mm H-108mm	A60
15W Size:	D-70mm H-126mm	A70

### SHAPE

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Packing
6W	3000K	540 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-01-4PK-6W-3K	4 Pack
6W	6500K	620 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-05-4PK-6W-65K	4 Pack
9W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-1PK-9W-65K	1 Pack
9W	3000K	840 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-2PK-9W-30K	2 Pack
9W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-2PK-9W-65K	2 Pack
9W	3000K	840 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-4PK-9W-30K	4 Pack
9W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-4PK-9W-65K	4 Pack
9W	3000K	840 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-6PK-9W-30K	6 Pack
9W	6500K	1400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-6PK-9W-65K	6 Pack
15W	3000K	1460 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-3K	2 Pack
15W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-6K	2 Pack
15W	3000K	1400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-1PK-15W-30K	1 Pack
15W	6500K	1460 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-1PK-15W-65K	1 Pack
15W	3000K	1400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-2PK-15W-30K	2 Pack
15W	6500K	1460 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-2PK-15W-65K	2 Pack

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

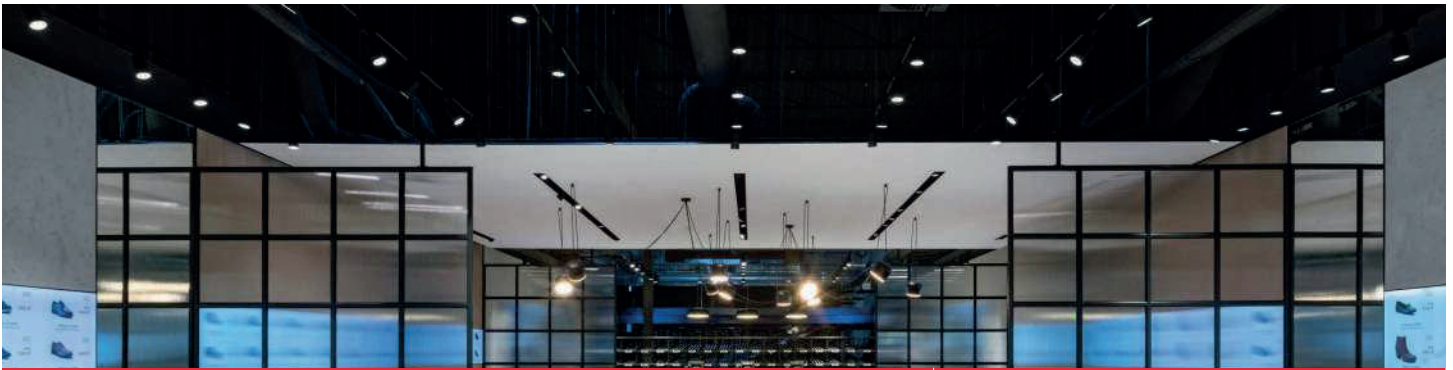

## LED LIGHTBULB GU10 / 2-PIN TWIST AND LOCK

## LUMINOUS INTENSITY DISTRIBUTION CURVE



### AVAILABLE WATTAGE OPTIONS:


- 5W
- 5W-DIM
- 7W
- 7W-DIM

### BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

### APPLICATION:

- For use in mains voltage GU10 downlights, spotlights and luminaires.



### SPECIFICATIONS

Shape:	GU10
Cap/Fitting:	GU10
Voltage:	100-130V / 100-240V / 100-277V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.
Certification:	CE

### DIMENSION

Height:	54 mm
Diameter:	50 mm
Height Bulb Pro:	55 mm
Diameter Bulb Pro:	50 mm

### ADDITIONAL INFORMATION

Equivalent:	50W Halogen GU10
-------------	------------------

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	420 Lm	100-240V - 50-60Hz	Non Dimmable	HW BGU10 01 2PK 5W 3K
5W	4000K	460 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-4K
5W	6500K	463 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-6K
5W	3000K	460 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM3K
5W	4000K	436 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM4K
5W	6500K	457 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM6K
7W	3000K	560 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-02-2PK-7W-DIM3K
7W	6500K	576 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-02-2PK-7W-DIM6K
7W	3000K	600 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-3K
7W	4000K	600 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-4K
7W	6500K	600 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-6K
7W	3000K	900 Lm	100-277V-50-60Hz	Non Dimmable	HW-BGU10-04PRO-2PK-7W-3K
7W	3000K	800 Lm	100-130V - 50-60Hz	Dimmable	HW-BGU10-05PRO-2PK-7W-DIM3K

For more information please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED LIGHTBULB MR16 / 2-PIN

LUMINOUS INTENSITY DISTRIBUTION CURVE




### AVAILABLE WATTAGE OPTIONS:

- 5W
- 5W-DIM

### BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

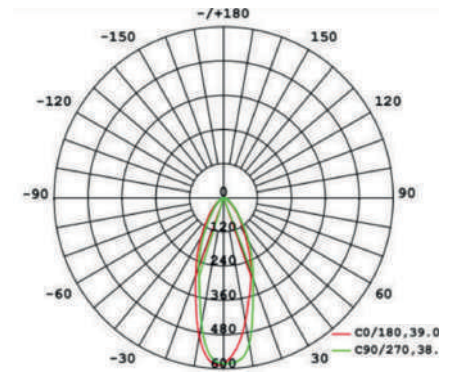

Shape:	MR16
Cap/Fitting:	GU5.3
Voltage:	100-240V / 100-130V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.

Height:	48 mm
Width:	50 mm

### ADDITIONAL INFORMATION

Equivalent: 50W Halogen MR16

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-3K
5W	4000K	420 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-4K
5W	6500K	420 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-6K
5W	3000K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM3K
5W	4000K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM4K
5W	6500K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





LED MINI-BULB G9

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 2.5W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

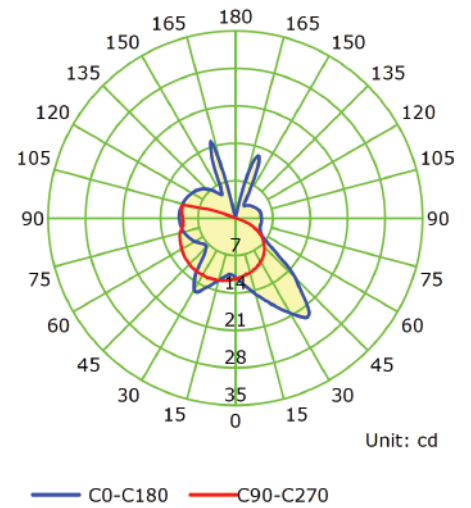

**SPECIFICATIONS**

Shape:	LED LIGHT BULB
Cap/Fitting:	G9
Beam Angle:	220° Degree

**DIMENSIONS**

Height:	48.5mm
Width:	16mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2.5W	3000K	220 lm	100-130V - 50-60Hz	Non Dimmable	HW-BG9-01-3PK-2.5W-3K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.



LED MINI-BULB G9

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 4W-DIM

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

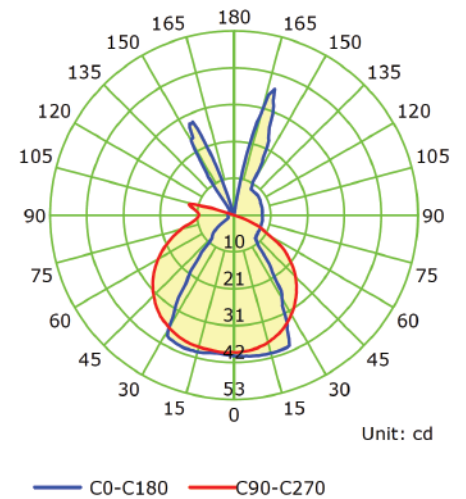

**SPECIFICATIONS**

Shape: LED LIGHT BULB  
 Cap/Fitting: G9  
 Beam Angle: 220° Degree

**DIMENSIONS**

Height: 54mm  
 Width: 18mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
4W	3000K	495 lm	100-130V - 50-60Hz	Dimmable	HW-BG9-02-3PK-4W-DIM3K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED MINI-BULB G4

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 1.8W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

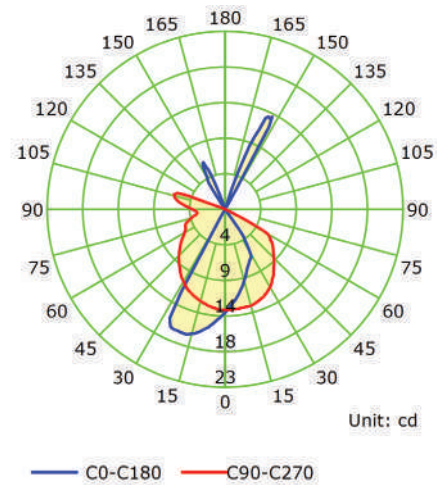

**SPECIFICATIONS**

Shape:	LED LIGHT BULB
Cap/Fitting:	G4
Beam Angle:	220° Degree

**DIMENSIONS**

Height:	10mm
Width:	38mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2W	3000K	220 Lm	12V - 50-60Hz	Non Dimmable	HW-BG4-01-3PK-1.8W-3K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



T8 LED LAMP

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 9W
- 18W
- 36W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

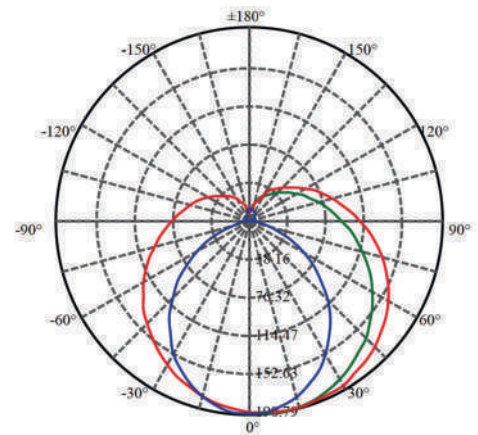

**SPECIFICATIONS**

Shape: LED TUBE  
 Cap/Fitting: T8

**ADDITIONAL INFORMATION**

Volt: 100-277V - 50-60Hz  
 Material: Glass

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Base	Size	Dimmable / Non Dimmable	Model
9W	3000K	939 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-3K
9W	4000K	934 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-4K
9W	6500K	900 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-6K
18W	3000K	1925 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-3K
18W	4000K	1925 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-4K
18W	6500K	1930 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-6K
36W	6500K	3758 Lm	FA8	W-25.5mm H-2380mm - 2.4m	Non Dimmable	HW-BT8-03-36W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



LED LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



**AVAILABLE WATTAGE OPTIONS:**


- 5W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

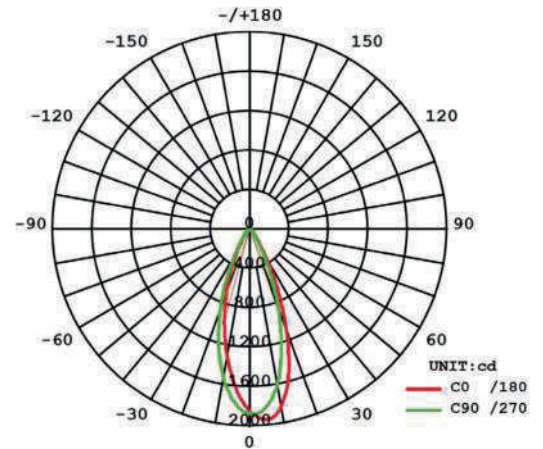

**SPECIFICATIONS**

Shape: PAR20  
 Cap/Fitting: E27  
 Beam Angle: 40°

**DIMENSIONS**

Height: 87mm  
 Width: 63mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000k	500Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-3K
5W	6500k	500Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**LED LIGHT BULB**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**AVAILABLE WATTAGE OPTIONS:**

- 9W


**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

**SHORT NECK**

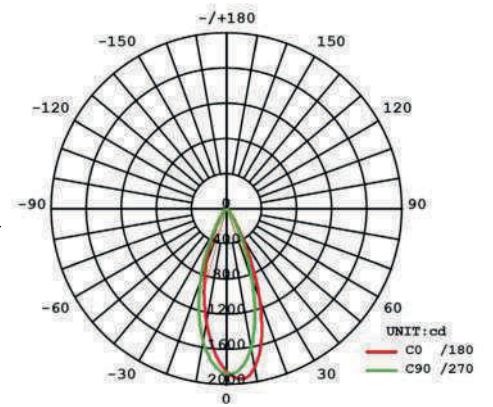

**SPECIFICATIONS**

Shape: PAR30  
 Cap/Fitting: E27  
 Beam Angle: 40°

**DIMENSIONS**

Height: 87mm  
 Diameter: 92mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
9W	3000K	900 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-3K
9W	4000K	950 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-4K
9W	6500K	950Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**LED PAR 30 BULB**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**




**AVAILABLE WATTAGE OPTIONS:**

- 12W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

**LONG NECK**

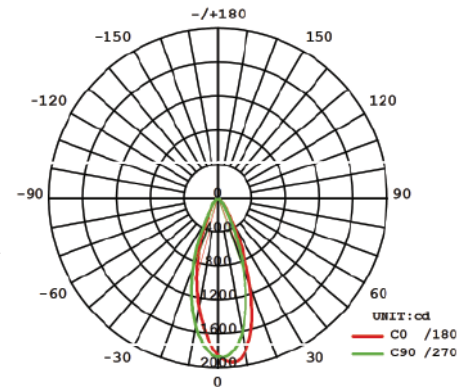

**SPECIFICATIONS**

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	40°
Certification:	CE

**DIMENSIONS**

Height:	122mm
Diameter:	95mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
12W	3000K	1150 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-01-12W-3K
12W	4000K	1200 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-01-12W-4K
12W	6500K	1150Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-01-12W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC023 | 01-2025



LED PAR 30 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



### AVAILABLE WATTAGE OPTIONS:


- 30W

### BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

### APPLICATION:

- Indoors lighting.
- Recessed track lighting.
- Flood lighting.

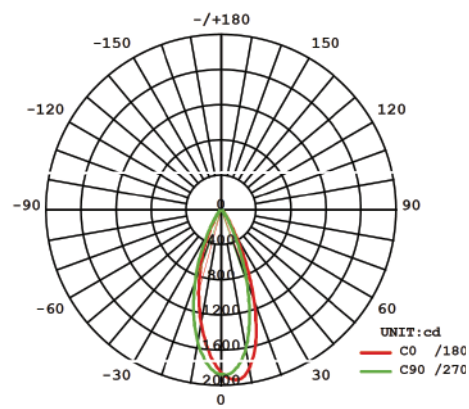

### SPECIFICATIONS

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	24°

### DIMENSIONS

Height:	128mm
Width:	95mm

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
30W	3000K	3000 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-02-30W-3K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

#### Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2024 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC100 | 01-2024





**LED PAR 38 BULB**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**AVAILABLE WATTAGE OPTIONS:**


- 9W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Indoors lighting.
- Recessed track lighting.
- Flood lighting.

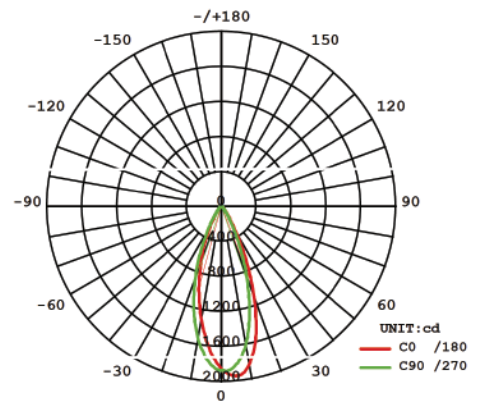

**SPECIFICATIONS**

Shape:	PAR38
Cap/Fitting:	E27
Beam Angle:	24°

**DIMENSIONS**

Height:	135mm
Width:	121mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
15W	3000K	1450 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP38-01-15W-3K
15W	6500K	1450 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP38-01-15W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2024 ILLUMINACIONES TECNICAS S.A. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Illuminaciones Técnicas S.A.



LED LIGHTBULB A19 CCT SWITCH

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 9W

**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

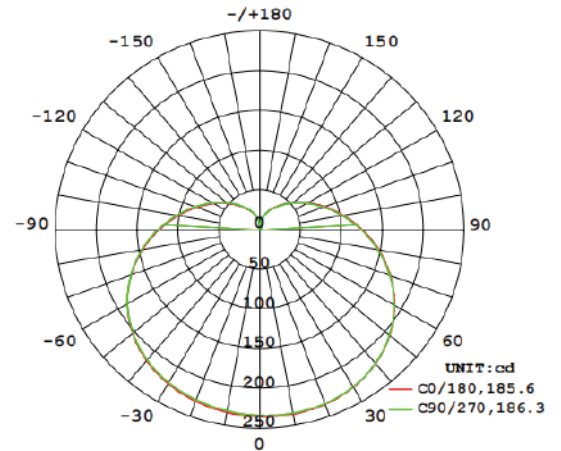

**SPECIFICATIONS**

Cap/Fitting:	E27
Voltage:	100-240V
Beam Angle:	180° Degree
Certification:	CE

**DIMENSION**

Size:	D-60mm H-110mm
Shape:	A19
Tone:	3000K/ 4000K/ 6500K

**AVAILABLE WATTAGE OPTIONS**

Power	Brightness	Volt	CCT	Dimmable / Non Dimmable	Model
9W	930 Lm	100-240V - 50-60Hz	3 Tone CCT Switch	Non Dimmable	HW-BA19-08-2PK-9W-CCT

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**LED PAR 30 BULB**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**AVAILABLE WATTAGE OPTIONS:**

- 9W


**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

**SHORT NECK**

**APPLICATION:**

- Indoors lighting.
- Recessed track lighting.
- Flood lighting.

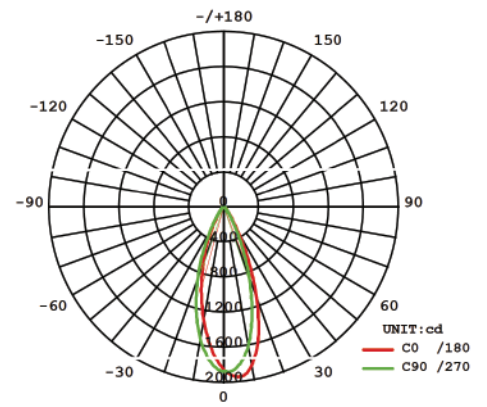

**SPECIFICATIONS**

Shape:	PAR30
Cap/Fitting:	E26
Beam Angle:	24°

**DIMENSIONS**

Height:	94mm
Width:	95mm
Tone:	2700K/ 3000K/ 3500K/ 4000K/ 5000K

**AVAILABLE WATTAGE OPTIONS**

Power	Brightness	Volt	CCT	Dimmable / Non Dimmable	Model
9W	950 Lm	120V - 50-60Hz	5 Tone CCT Switch	Dimmable	HW-BP30-03-2PK-9W-5CCT-DIMSN

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**LED PAR 30 BULB**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**AVAILABLE WATTAGE OPTIONS:**

- 9W


**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

**LONG NECK**

**APPLICATION:**

- Indoors lighting.
- Recessed track lighting.
- Flood lighting.

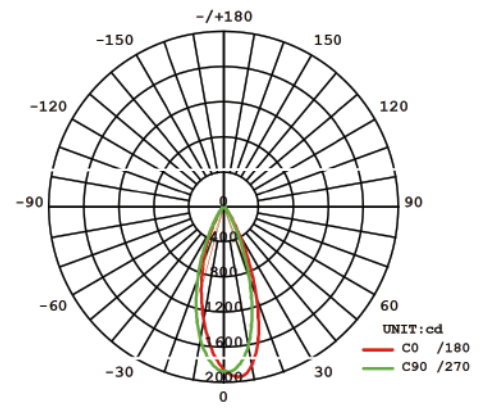

**SPECIFICATIONS**

Shape:	PAR30
Cap/Fitting:	E26
Beam Angle:	24°

**DIMENSIONS**

Height:	118mm
Width:	95mm
Tone:	2700K/ 3000K/ 3500K/ 4000K/ 5000K

**AVAILABLE WATTAGE OPTIONS**

Power	Brightness	Volt	CCT	Dimmable / Non Dimmable	Model
9W	950 Lm	120V - 50-60Hz	5 Tone CCT Switch	Dimmable	HW-BP30-04-2PK-9W-5CCT-DIMLN

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



# Honeywell

## LED PANELS 2025



RECESSED LED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 3 W
- 6 W
- 12W
- 18W

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

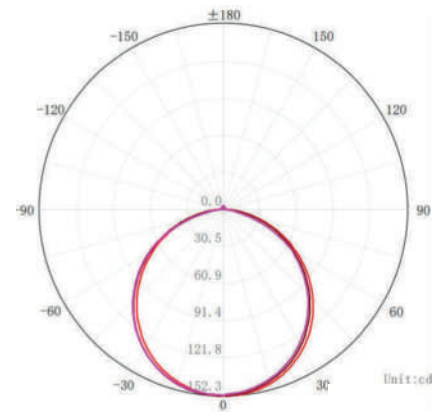

**SPECIFICATIONS**

Shape:	Round LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

**ADDITIONAL INFORMATION**

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
3W	3000K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-3K
3W	6500K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-6K
6W	3000K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-3K
6W	6500K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-6K
12W	3000K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-3K
12W	6500K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-6K
18W	3000K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-3K
18W	6500K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).

**Iluminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC102 | 01-2025



RECESSED LED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




**AVAILABLE WATTAGE OPTIONS:**

- 6W-CCT Switchable
- 9W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

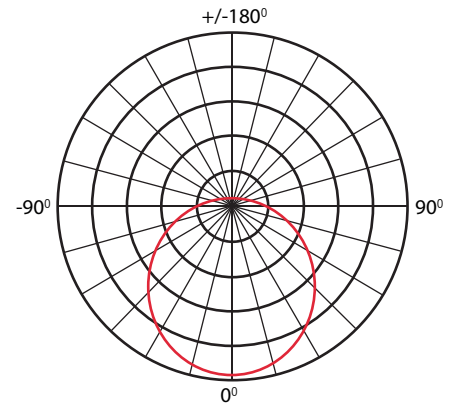

SPECIFICATIONS	
Shape:	Round LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION		
Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
6W	3000K/4000K/6500K	362Lm/445Lm/353Lm	D-115mm H-18mm	Non Dimmable	HW-P05-R6W-CCT	
9W	3000K/4000K/6500K	627Lm/667Lm/627Lm	D-167mm H-18mm	Non Dimmable	HW-P05-R9W-CCT	
12W	3000K/4000K/6500K	815Lm/916Lm/827Lm	D-167mm H-18mm	Non Dimmable	HW-P05-R12W-CCT	
18W	3000K/4000K/6500K	1430Lm/1580Lm/1430Lm	D-220mm H-18mm	Non Dimmable	HW-P05-R18W-CCT	
24W	3000K/4000K/6500K	1730Lm/1900Lm/1730Lm	D-292mm H-18mm	Non Dimmable	HW-P05-R24W-CCT	

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).



**LED RECESSED PANEL LIGHT**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**




**AVAILABLE WATTAGE OPTIONS:**

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

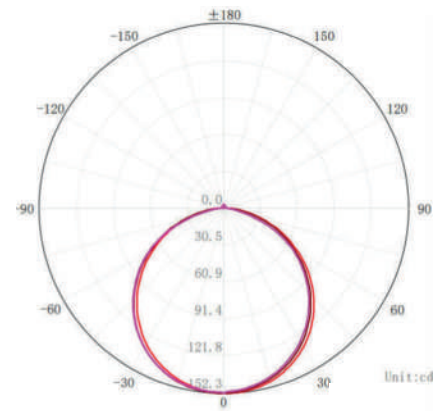

SPECIFICATIONS	
Shape:	Square LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION		
Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
6W	3000K	390 Lm	120mm x120mm x 18mm	Non Dimmable	HW-P02-S6W-3K	
6W	6000K	390Lm	120mm x120mm x 18mm	Non Dimmable	HW-P02-S6W-6K	
6W	3000K/4000K/6500K	323Lm/398Lm/332Lm	119mm x119mm x 18mm	Non Dimmable	HW-P06-S6W-CCT	
12W	3000K/4000K/6500K	733Lm/824Lm/744Lm	169mm x169mm x 18mm	Non Dimmable	HW-P06-S12W-CCT	
18W	3000K	1540Lm	220mm x220mm x 18mm	Non Dimmable	HW-P02-S18W-CCT	
18W	6500K	1540Lm	220mm x220mm x 18mm	Non Dimmable	HW-P02-S18W-CCT	
18W	3000K/4000K/6500K	1430Lm/1580Lm/1430Lm	220mm x220mm x 18mm	Non Dimmable	HW-P06-S18W-CCT	
24W	3000K/4000K/6500K	1730Lm/1900Lm/1730Lm	290mm x290mm x 18mm	Non Dimmable	HW-P06-S24W-CCT	

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).





LED SURFACE PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE




**AVAILABLE WATTAGE OPTIONS:**

- 12W
- 18W

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

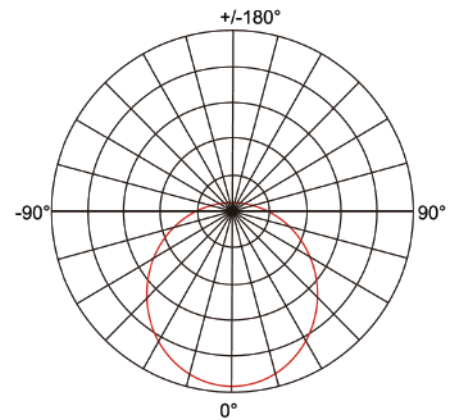

**SPECIFICATIONS**

Shape:	Round LED Lamp
Cap/Fitting:	Surface Mounted Ceiling
Finish:	White

**ADDITIONAL INFORMATION**

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
12W	6500K	750Lm	D-160mm H-27mm	Non Dimmable	HW-P03-R12W-6K
18W	6500K	1200Lm	D-210mm H-27mm	Non Dimmable	HW-P03-R18W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).



**LED SURFACE PANEL LIGHT**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**(CCT) Color Temperature Switch**




**AVAILABLE WATTAGE OPTIONS:**

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

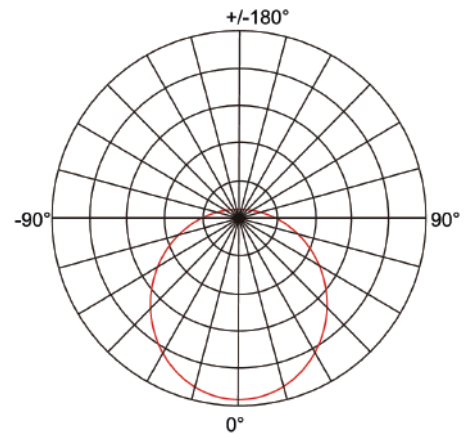

**SPECIFICATIONS**

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

**ADDITIONAL INFORMATION**

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	330 Lm / 440 Lm / 330 Lm	D-112mm H-28mm	Non Dimmable	HW-P07-R6W-CCT
12W	3000K/4000K/6500K	770 Lm / 880 Lm / 770 Lm	D-160mm H-28mm	Non Dimmable	HW-P07-R12W-CCT
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	D-210mm H-28mm	Non Dimmable	HW-P07-R18W-CCT (White or Black)
24W	3000K/4000K/6500K	1730 Lm / 1900 Lm / 1730 Lm	D-282mm H-28mm	Non Dimmable	HW-P07-R24W-CCT

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).



**SURFACE MOUNTED LED PANEL**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**




### AVAILABLE WATTAGE OPTIONS:

- 18W
- 24W

### BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

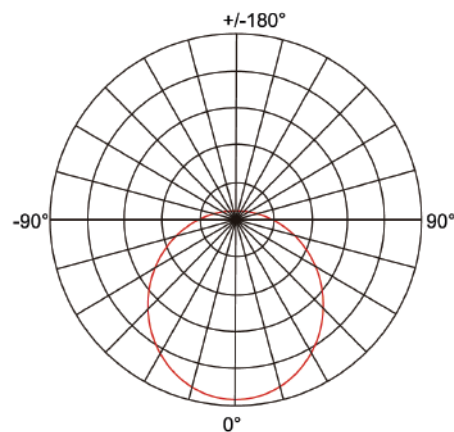

SPECIFICATIONS	
Shape:	Square LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION		
Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
18W	6500K	1540Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-6K	
18W	3000K	1540Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-3K	
24W	3000K	1400Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-3K	
24W	6500K	1400Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-6K	

**For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).**

**Iluminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.



**SURFACE MOUNTED LED PANEL**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**(CCT) Color Temperature Switch**




**AVAILABLE WATTAGE OPTIONS:**

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

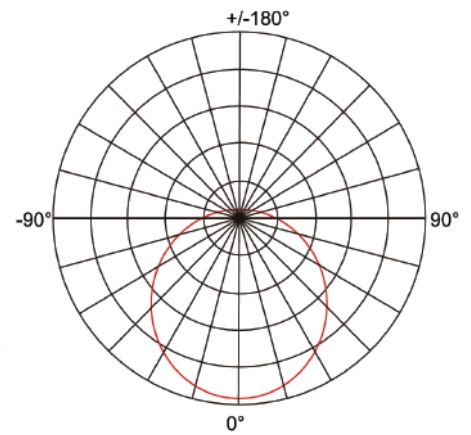

**SPECIFICATIONS**

Shape:	Square LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

**ADDITIONAL INFORMATION**

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	330 Lm / 440 Lm / 330 Lm	112mm x 112mm x 28mm	Non Dimmable	HW-P08-S6W-CCT
12W	3000K/4000K/6500K	815Lm/916Lm/827Lm	160mm x 160mm x 28mm	Non Dimmable	HW-P08-S12W-CCT
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	210mm x 210mm x 28mm	Non Dimmable	HW-P08-S18W-CCT (White or Black)
24W	3000K/4000K/6500K	1730 Lm / 1900 Lm / 1730 Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P08-S24W-CCT

**For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).**



LED SURFACE PANEL LIGHT WITH MOTION SENSOR

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




**AVAILABLE WATTAGE OPTIONS:**

- 18W CCT Switchable

**BENEFITS:**

- Motion Sensor.
- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.

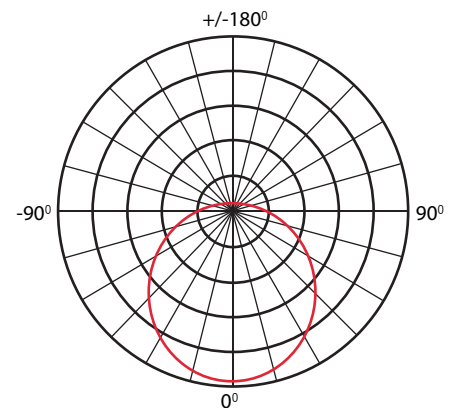

**SPECIFICATIONS**

Shape: Round LED Lamp with Motion Sensor  
 Fitting: Surface Mounted Ceiling

**ADDITIONAL INFORMATION**

Volt: 100-277V 50-60Hz  
 Beam Angle: 110°

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
18W	3000K/4000K/6500K	1440Lm/1440Lm/1415Lm	D-210mm H-37mm	Non Dimmable	HW-P09-SM-R18W-CCT

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



**AVAILABLE WATTAGE OPTIONS:**


- 5W

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

**APPLICATION:**

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

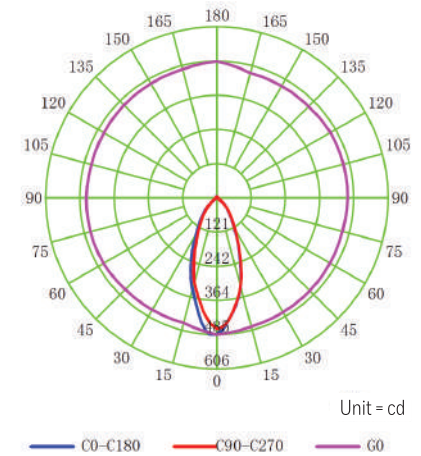

SPECIFICATIONS	
Shape:	Round LED Lamp
Fitting:	Tiltable Angle
Finish:	White and Black Available

ADDITIONAL INFORMATION	
Height:	45mm
Width:	90mm
Beam Angle:	38° Degree

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-WH-3K	
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-WH-6K	
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-BK-3K	
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-BK-6K	

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



### AVAILABLE WATTAGE OPTIONS:


- 5W

### BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

### APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

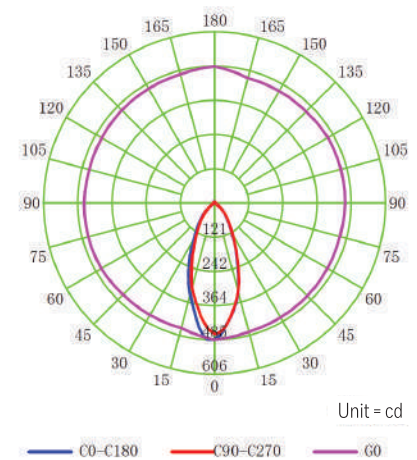

### SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

### ADDITIONAL INFORMATION

Height:	45mm
Length / Width:	90mm x 90mm
Beam Angle:	38° Degree

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-6K
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).

### Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2015 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC106 | 01-2025



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



### AVAILABLE WATTAGE OPTIONS:


- 6.5W

### BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

### APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

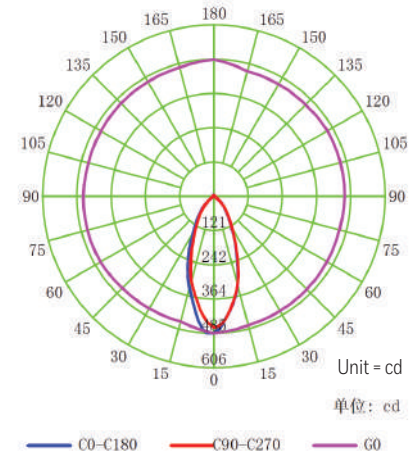

### SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

### ADDITIONAL INFORMATION

Height:	45mm
Width:	90mm
Beam Angle:	38° Degree

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
6.5W	3000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D03-6.5W-BK-3K
6.5W	6000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D03-6.5W-BK-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



**AVAILABLE WATTAGE OPTIONS:**


- 6.5W

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

**APPLICATION:**

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

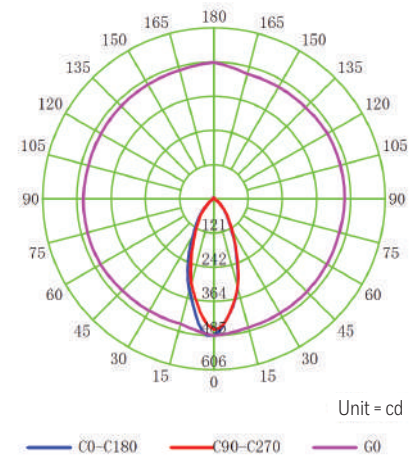

**SPECIFICATIONS**

Shape:	Square LED Lamp
Fitting:	Tiltable Angle
Finish:	White and Black Available

**ADDITIONAL INFORMATION**

Height:	45mm
Length / Width:	90mm x 90mm
Beam Angle:	38° Degree

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
6.5W	3000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-WH-3K
6.5W	6500K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-WH-6K
6.5W	3000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-BK-3K
6.5W	6500K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-BK-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



# Honeywell

## COMMERCIAL LIGHTS 2025

## LED WALL LAMP

HW-WP-02-PS-CCT



Two-Piece Die-Cast Aluminum Housing with Thermally Conductive LED Panel and Electrical Chamber  
 Tunable CCT for 4000K, 5000K, 6000K, Color Temperature Options  
 Anti-UV Prismatic Translucent Lens Designed to Shape the Light Distribution and Uniformity.  
 Mounting via J-box or Surface Conduit

### FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection
- IP65

### APPLICATION

- Industrial Areas • Parks
- Sidewalks • Schools
- Squares • And others.

Indoor / Outdoor



Multi Wattage Switchable



Multi Color Temperature (CCT)






Easy Installation



Water Proof

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	4000K, 5000K, 6000K	Finish	Dark Bronze	Input Power	35W, 55W, 80W
Luminous Flux	6,275 lm/9160 lm/12,619	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	100°	Dimensions	316x175x152 mm	Operating Voltage	120-277V
Type of Distribution	Direct Symmetrical	Type of Installation	Surface Mounted	Frequency	50-60 Hz
Life Span	50 000 Hrs	Body Frame	Die-Cast Aluminium	Power Factor	>0.95
		Weight	2.05 Kg	CRI	70
		Operation Temperature	-40°C to +50°C		

### DIMENSIONS

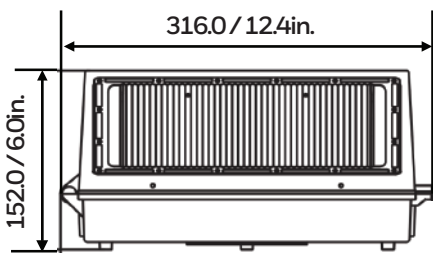


Power Selector Switch



CCT Selector Switch

### LUMINOUS INTENSITY DISTRIBUTION

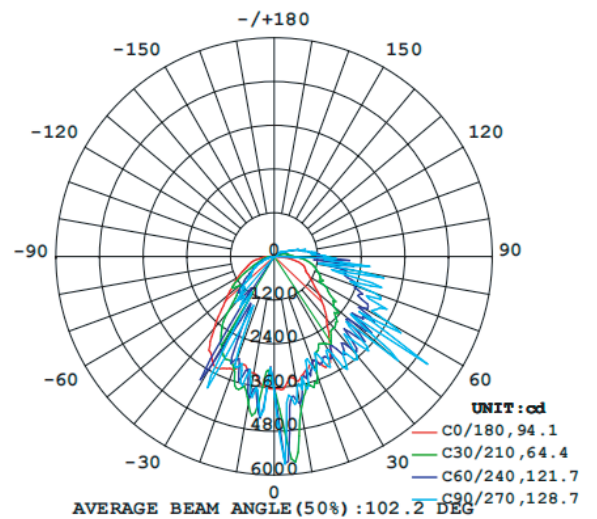

## LED WALL LAMP

HW-WP-01-PS-CCT



Rugged, die-cast housing with advanced thermal management system ensures reliability and durability. Weather-proof, gasketed driver compartment protects electronics against environmental elements.

Tunable CCT for 4000K, 5000K, 6000K, Color Temperature Options

Anti-UV Prismatic Translucent Lens Designed to Shape the Light Distribution and Uniformity. Mounting via J-box or Surface Conduit.

Casting Thermally Conducts LED Heat to Optimize Performance and Long Life

Pre-Installed Photocell Sensor

### FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection
- IP65

### APPLICATION

- Industrial Areas
- Schools
- Sidewalks
- Residential

Outdoor



PHOTOCELL  
SENSOR



Multi Wattage  
Switchable



Multi Color  
Temperature  
(CCT)



Easy  
Installation



Water  
Proof

### OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Lumens	2,359 lm / 3,213 lm / 4,480 lm
Beam Angle	100°
Type of Distribution	Direct Symmetrical
Life Span	50,000 Hrs
Weight	0.52 kg


### PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Dimensions	144x224x85mm
Type of Installation	Surface Mounted
Body Frame	Die-Cast Aluminium
Optical Material	Diffuser PC
Operation Temperature	-40°C to +50°C

### ELECTRICAL DATA

Input Power	15W, 20W, 30W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70


### DIMENSIONS

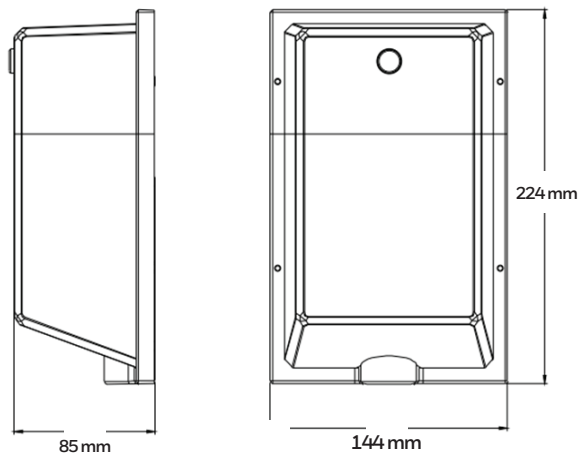


Power Selector Switch



CCT Selector Switch



### LUMINOUS INTENSITY DISTRIBUTION

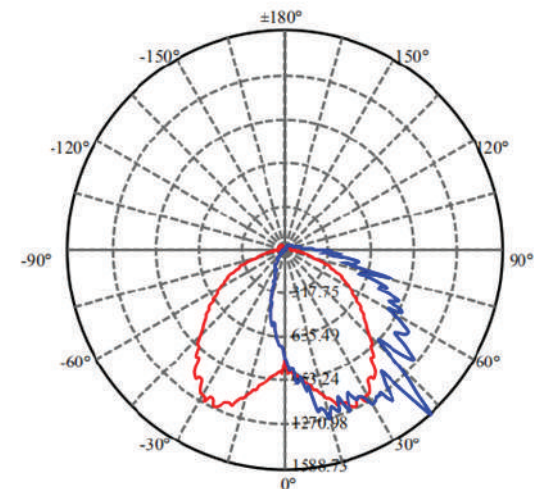

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: info@HoneywellLights-fans.com

www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC207 | 01-2025

## LED PANEL LIGHT HW-P2X2-04-PS-CCT-UL



Backlite panel UL Certified, with high uniform lighting performance. watt and CCT selectable

### FEATURES

- ANSI C82.77-2002 Surge Protector
- THD < 20%
- Excellent surface treatment.
- Light in weight and more like traditional grille light, better for user experience.
- Backlit design without LGP, No risk of yellowing.
- Fully Automated production lines guarantees short lead time.
- 3 CCT Selectable: 3500K, 4000K, 5000K could be adjusted with a switch

### APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- And others

Indoor




RoHS






OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3500K, 4000K, 5000K	Finish	White	Input Power	20W, 30W, 35W
CCT Switchable	YES	Protection Level - IP	IP20	Power Switchable	YES
Luminous Flux	3240/4490/5330 lm	Dimensions (LxWxH)	604x604x38mm	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Frequency	50-60 Hz
Beam Angle	120°	Body Frame	Aluminium	Power Rating	>0.90
Efficiency	110 Lm/W	Optical Material	Diffuser PC	CRI	80
Life Span	50,000 Hrs	Operation Temperature	-20°C to +40°C	Dimmable	0-10V


### DIMENSIONS

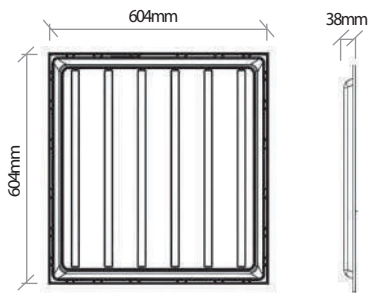

This panel can be installed in two different ways: hanging or recessed.




### LUMINOUS INTENSITY DISTRIBUTION

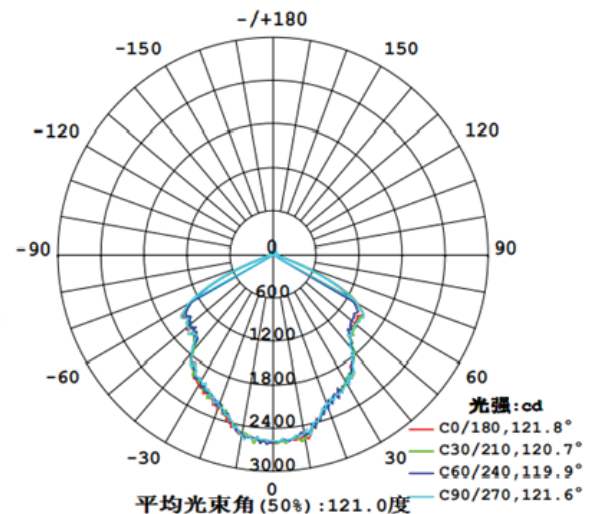

### LED PANEL LIGHT

HW-P2X2-05-40W-CCT

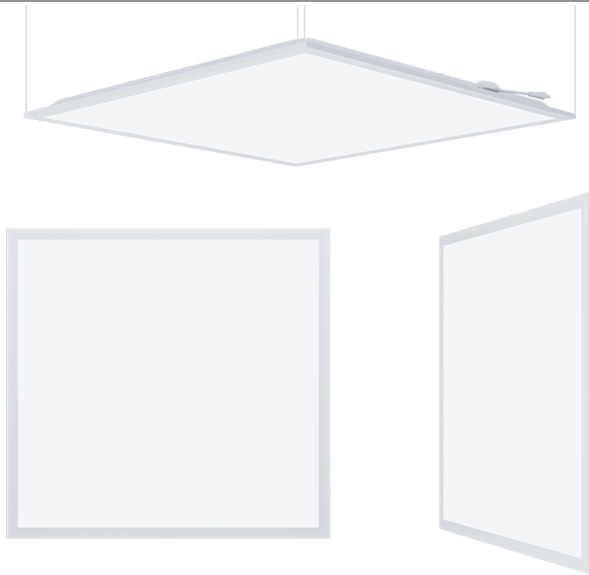

Backlit Panel Certified, with high uniform lighting performance. CCT selectable switch.

#### FEATURES

- Backlit design without LGP, No risk of yellowing.
- THD>20%
- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

#### APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas

CE LED IP 20



Multi Color Temperature (CCT)



Easy Installation






Save Money




Life Span 50,000 H

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	White	Input Power	40W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	4100, 4700, 4500Lm	Dimensions (LxWxH)	595x595x34mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117Lm/W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50 000 Hrs	Operation Temperature	00°C to +40°C		



#### DIMENSIONS



(CCT) Color Temperature Switch




#### LUMINOUS INTENSITY DISTRIBUTION

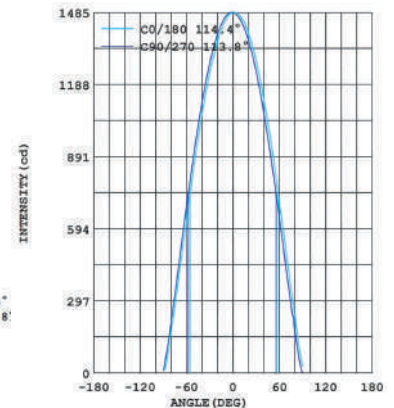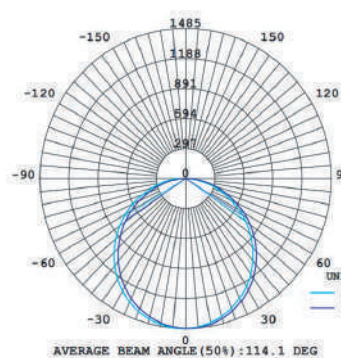

### LED PANEL LIGHT

HW-P1X4-05-40W-CCT

Backlit Panel Certified, with high uniform lighting performance. CCT selectable Switch.

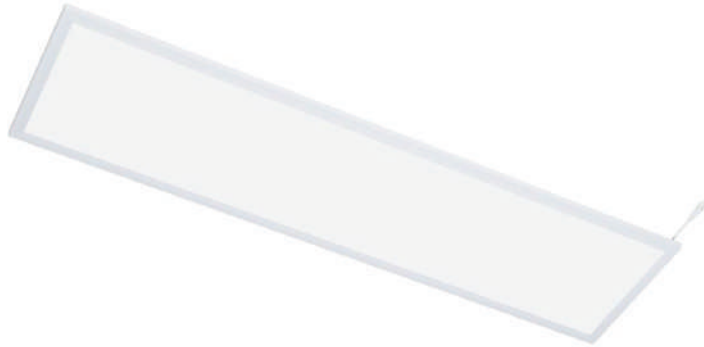

Indoor

#### FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency
- THD > 20%
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

#### APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



LED



Life Span  
50,000 H



Multi Color  
Temperature  
(CCT)



Easy  
Installation




Save Money

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	White	Input Power	40W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	4000, 4700, 4450 Lm	Dimensions (LxWxH)	295x1195x34 mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117 Lm/W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50000 Hrs	Operation Temperature	0°C to +40°C		

### DIMENSIONS LUMINOUS INTENSITY DISTRIBUTION

This panel can be installed in two different ways: hanging or recessed.

(CCT) Color Temperature Switch

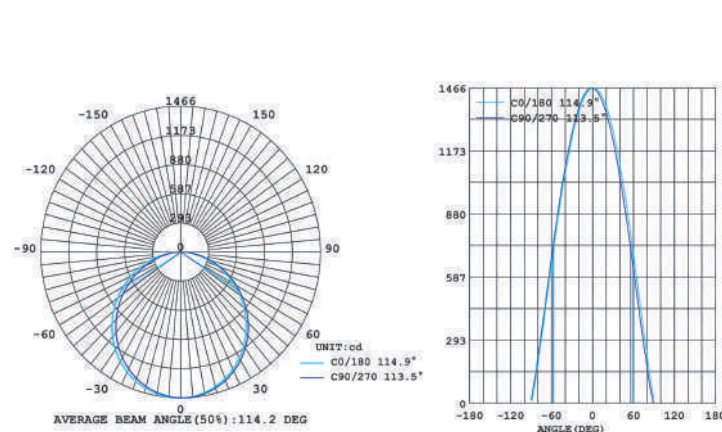

### LED PANEL LIGHT

HW-P2X4-04-PS-CCT-UL

Backlit Panel UL Certified, with high uniform lighting performance. CCT selectable switch.

#### FEATURES

- Backlit design without LGP, No risk of yellowing.
- ANSI C82.77-2002 Surge Protector
- THD<20%
- Energy efficiency
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3500K, 4000K, 5000K could be adjusted with a switch

#### APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



Indoor



RoHS




Multi Color Temperature (CCT)



Multi Wattage Switchable





OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3500K, 4000K, 5000K	Finish	White	Input Power	30W, 35W, 45W
CCT Switchable	YES	Protection Level - IP	IP20	Power Switchable	YES
Luminous Flux	4260/ 4390/6090 Lm	Dimensions (LxWxH)	1214x604x38mm	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Frequency	50-60 Hz
Beam Angle	120°	Body Frame	Aluminium	Power Rating	>0.90
Efficiency	135 Lm/W	Optical Material	Diffuser PC	CRI	80
Life Span	50000 Hrs	Operation Temperature	-20°C to +40°C	Dimmable	0-10V

#### DIMENSIONS

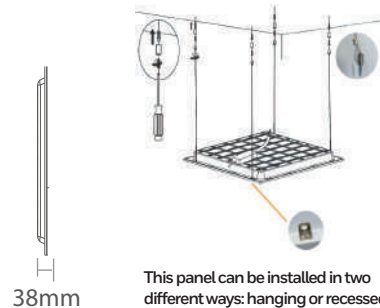

This panel can be installed in two different ways: hanging or recessed.

#### LUMINOUS INTENSITY DISTRIBUTION

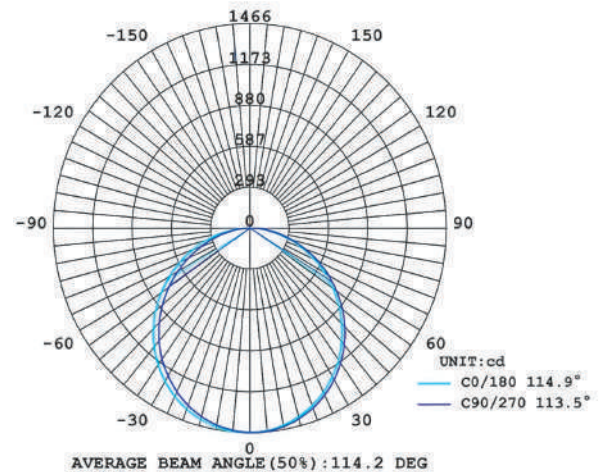



### LED PANEL LIGHT

HW-P2X4-05-60W-CCT

Backlit Panel Certified, with high uniform lighting performance. CCT selectable switch.



#### FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency
- THD > 20%
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

#### APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



Life Span  
50,000 H

# LED



Multi Color  
Temperature  
(CCT)



Easy  
Installation



Save Money

#### OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
CCT Switchable	YES
Luminous Flux	6600, 7400, 7000Lm
Type of Distribution	Direct Symmetrical
Beam Angle	120°
Efficiency	117 Lm/W
Life Span	50000 Hrs


#### PHYSICAL DATA

Finish	White
Protection Level - IP	IP20
Dimensions (LxWxH)	1195x595x34mm
Type of Installation	Recessed or Hanging
Body Frame	Aluminium
Optical Material	Diffuser PS
Operation Temperature	0°C to +40°C

#### ELECTRICAL DATA

Input Power	60W
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO


#### DIMENSIONS





34mm

This panel can be installed in two different ways: hanging or recessed.

(CCT) Color Temperature Switch



#### LUMINOUS INTENSITY DISTRIBUTION

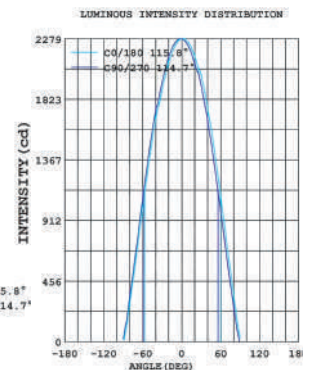

#### Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
Email: info@HoneywellLights-fans.com  
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC200 | 01-2025

### LED CANOPY LAMP

HW-CAN-01-PS-CCT



The CAN-01 Selectable Canopy Light is a contractor experience LED canopy light - designed to save you money, save you time, and install quickly.

3 selectable lumen outputs for different ceiling heights and 3 selectable CCT color outputs.

Fast installation that's prime for an easy retrofit - engineered with your experience first.

#### FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection, IP65

#### APPLICATION

- Industrial Areas
- Sidewalks
- Commercial Areas
- Parks
- Schools
- And others.

Indoor / Outdoor



**LED**



**Multi Wattage Switchable**



**Multi Color Temperature (CCT)**



**Easy Installation**



**Water Proof**

#### OPTICAL DATA

Color Temperature (CCT)	4000K, 5000K, 6000K
Lumens	6,446 lm / 9072 lm / 12648 lm
Beam Angle	120°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H
Weight	2.2kg



#### PHYSICAL DATA

Finish	White
Protection Level - IP	IP65
Dimensions (LxWxH)	265x265x84 mm
Type of Installation	Surface Mounted
Body Frame	Die Cast Aluminium
Optical Material	Diffuser PC
Operation Temperature	-40°C to +50°C



#### ELECTRICAL DATA

Input Power	40W, 60W, 80W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

#### DIMENSIONS




Power Selector Switch



CCT Selector Switch

#### LUMINOUS INTENSITY DISTRIBUTION

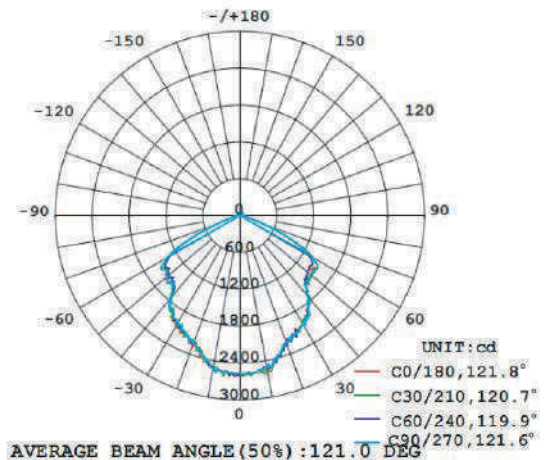

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: info@HoneywellLights-fans.com

www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS SA. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Illuminaciones Técnicas S.A.

SPEC219 | 01-2025

## LED TRI-PROOF LIGHT

HW-TRI-02-36W-65K



Indoor

Dust-tight LED luminaire, clipless design, for environments with high humidity and dirt, such as parking lots, industrial facilities, food processing plants or kitchens. with two mounting options, surface or suspended from the ceiling.

Power: 36W

Cool Day Light

### FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Water Proof


### APPLICATION

- Residential Areas
- Sidewalks
- Parks
- Schools
- And others




OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	6500K	Finish	White	Input Power	36W
Luminous Flux	4700 lm	Protection Level - IP/IK	IP 65/IK07	Power Switchable	NO
Beam Angle	120°	Dimensions (LxWxH)	1200 X 63 X 33mm	Operating Voltage	100-277V
Type of Distribution	Direct Symmetrical	Type of Installation	Ceiling Mountable	Frequency	50-60 Hz
		Body Frame	PC	Power Rating	> 0.50
		Optical Material	Diffuser PC	CRI	80
		Operation Temperature	-20°C to +40°C	Dimmable	Non Dimmable

### DIMENSIONS

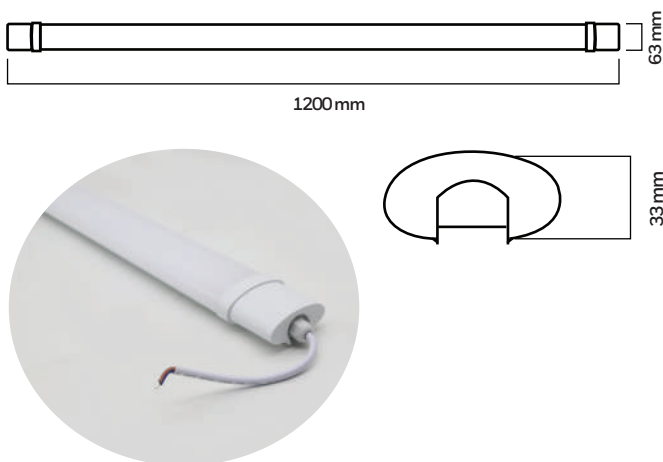

### LUMINOUS INTENSITY DISTRIBUTION

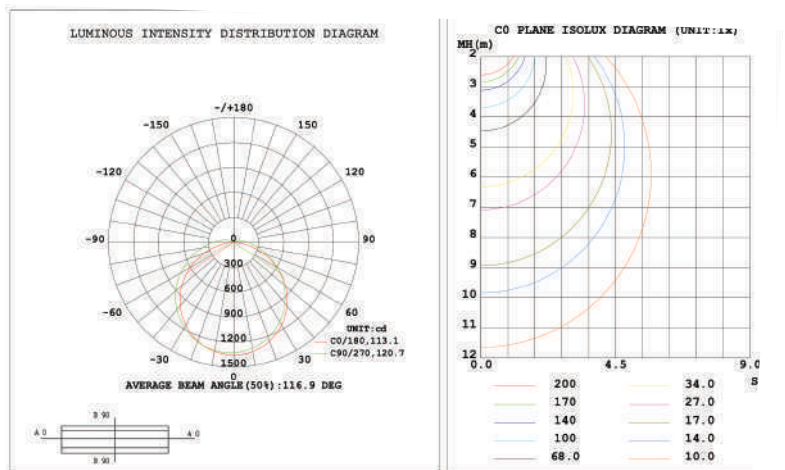

**Illuminaciones Técnicas S.A.**  
Panama Headquarters 1 (888) 502-8432  
Email: info@HoneywellLights-fans.com  
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.  
The Honeywell trademark is used under license from Honeywell International Inc.  
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC205 | 01-2025

## LED TRI-PROOF LIGHT

HW-TRI-01-PS-65K



Hermetic industrial luminaire, clipless design, smooth and elegant appearance, no need to open the diffuser to connect with safe and reliable protection level  
Switchable power: 30W, 40W or 50W.

### FEATURES

- UV protection
- Built in high luminous efficiency LED Chip and Driver
- IP65/IK08
- 3 Level Power Switchable
- Fast connection
- Light Efficiency: 100-118lm/W

### APPLICATION

- Industrial Areas
- Schools
- Sidewalks
- And Others
- Parks



**LED**



**Multi Wattage Switchable**



**Eco Friendly**


**UV Protection**



**Easy Installation**


OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	6500 K	Finish	Gray & White	Input Power	30W, 40W, 50W
Luminous Flux	3540, 4280, 5170 Lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	120°	Dimensions (LxWxH)	1200x70x56 mm	Operating Voltage	100-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Surface Mounted	Frequency	50-60 Hz
Opening Angle	80	Body Frame	PC	Power Factor	>0.9
Efficiency	100-118 Lm/W	Optical Material	Diffuser PC	CRI	80
		Operation Temperature	-20°C to +40°C	Dimmable	NO

### DIMENSIONS

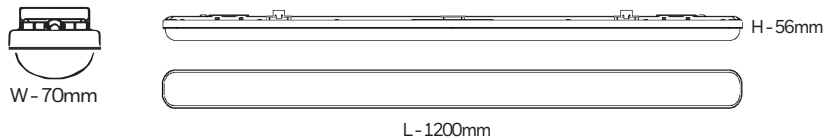

Power Selectable Switch

### LUMINOUS INTENSITY DISTRIBUTION

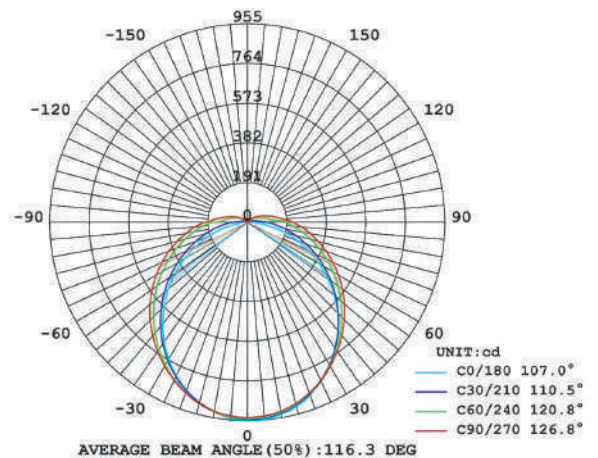

#### Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
Email: info@HoneywellLights-fans.com  
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC201 | 01-2025

### LED LINEAR LIGHT

HW-LI01-40W-CCT



LED Linear luminaire, homogeneous light distribution without shadows, for a continuous, clean and simple lighting system. Modern and compact design with LED strip and opalized diffuser.

With 3 installation methods: hanging, surface-mounted, or recessed/Trimless

#### FEATURES

- 3 Color Switchable Selection 3000K/4000K/6500K
- 1.5 Mt Hanging Kit Adjustable
- Ability to operate in cold conditions.
- Design flexibility.
- General lighting for limited build-in height
- Instant lighting and the ability to withstand frequent switching.

#### APPLICATION

- Offices
- Stores
- Residential
- Commercial Areas
- Educational Institutions
- And Others



LED



Multi Color Temperature (CCT)



Save Money



Eco Friendly




3 Type of Installation

Hanging, Surface & Recessed


OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6500K	Finish	Black/White	Input Power	40W
Luminous Flux	4000 Lm	Protection Level - IP	IP20	Driver Type	Isolated Driver
Beam Angle	110°	Dimensions (LxWxH)	1191x50x70 mm	Operating Voltage	100-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	3 Type of Installation	Frequency	50-60 Hz
Efficiency	100 Lm/W	Body Frame	Aluminium	CRI	80
		Optical Material	PMMA	Operation Temperature	-20°C to +40°C

### DIMENSIONS

### LUMINOUS INTENSITY DISTRIBUTION

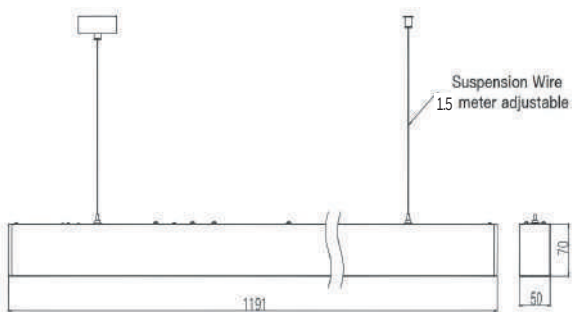


(CCT) Color Temperature Switch



Select one of the following 3 installation methods :



Tri-Mount Options  
Tres opciones de montaje



Hanging installation





Surface installation



Recessed installation



Seamless effect interconnectable

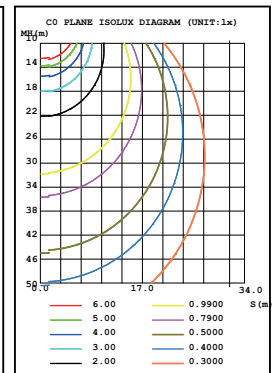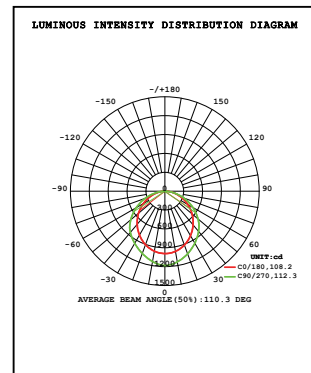

## LED FLOOD LIGHT

HW-FL-01-10W



Outdoor

LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. Includes a breather valve that dissipates moisture.

### FEATURES

- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- Anti Siphon Cable

### APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes



IP65

LED



Indoor  
Outdoor




Save Money




Easy  
Installation

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K or 6000K	Finish	Black	Input Power	10W
CCT Switchable	NO	Protection Level - IP	IP65	Operating Voltage	100-277 V
Luminous Flux	930 Lm	Dimensions (LxWxH)	90x28x65mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Wall or Ceiling Mount	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117 Lm / W	Optical Material	Glass	Dimmable	NO
		Operation Temperature	-20°C to +40°C		

### DIMENSIONS

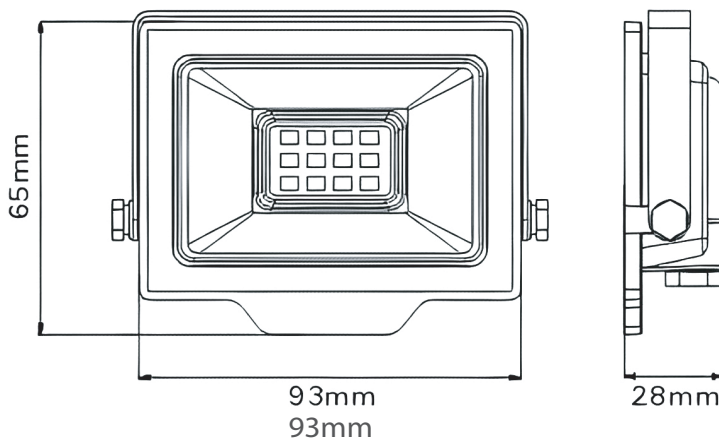

### LUMINOUS INTENSITY DISTRIBUTION

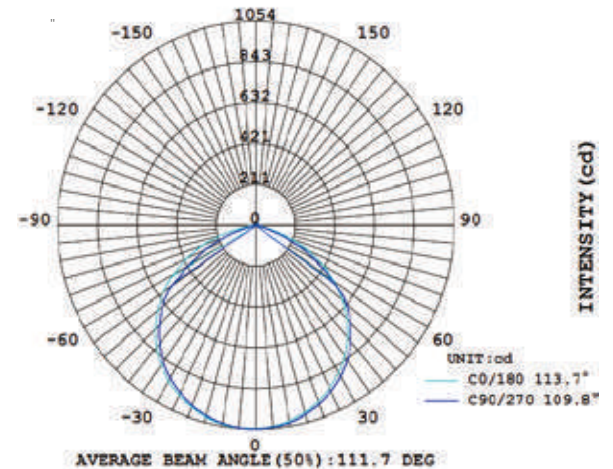

## LED FLOOD LIGHT

HW-FL-01-30W-CCT



Outdoor

LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. Includes a breather valve that dissipates moisture.

### FEATURES

- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- Anti Siphon Cable

### APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes

CE IP65 LED



Indoor  
Outdoor




Multi Color  
Temperature  
(CCT)




Easy  
Installation

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	Black	Input Power	30W
CCT Switchable	YES	Protection Level - IP	IP65	Operating Voltage	100-277 V
Luminous Flux	3210 Lm	Dimensions (LxWxH)	140x28x120mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Wall or Ceiling Mount	CRI	80
Beam Angle	120°	Body Frame	Aluminium	Dimmable	NO
		Optical Material	Glass		
		Operation Temperature	-20°C to +40°C		

### DIMENSIONS

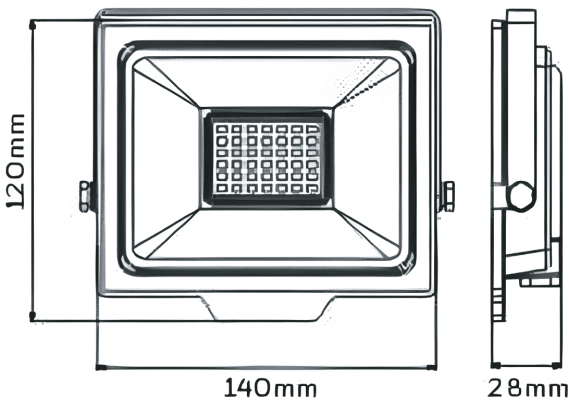

### LUMINOUS INTENSITY DISTRIBUTION

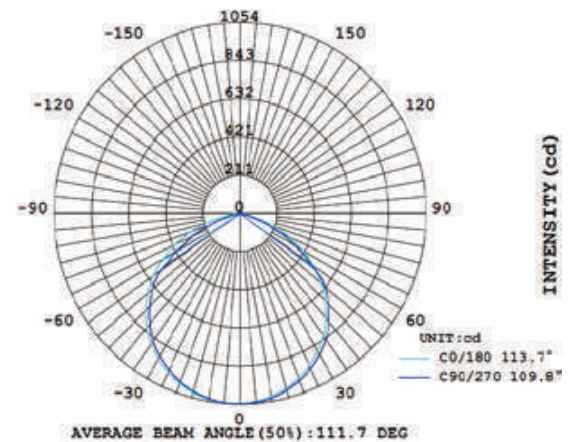

## LED FLOOD LIGHT

HW-FL-02-RGB



LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. RGB color adjustment providing the color tone you

### FEATURES

- Remote control included, RGB type.
- Energy efficiency
- No UV emissions
- Long Lifespan

### APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes

Outdoor



IP65

LED



Indoor  
Outdoor



Save Money



Easy  
Installation

### SPECIFICATIONS

Model	Power	CCT	Dimensions (LxWxH)	Remote Control	Use
HW-FL-02-10W-RGB	10W	RGB	110x28x90mm	YES	Indoor / Outdoor
HW-FL-02-50W-RGB	50W	RGB	175x28x140mm	YES	Indoor / Outdoor

### OPTICAL DATA

Color Temperature (CCT)	RGB Color
Vented	YES
Type of Distribution	Direct Symmetrical
Beam Angle	120°


### PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Glass
Operation Temperature	-20°C to +40°C

### ELECTRICAL DATA


Operating Voltage	100-277 V
Frequency	50-60 Hz
CRI	80
Remote Control Included	YES
Dimmable	NO

### DIMENSIONS

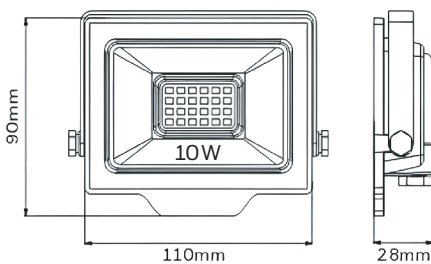

110mm

28mm

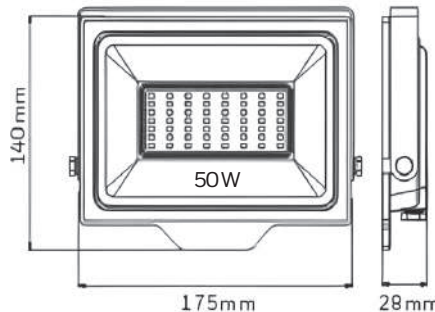


175mm

28mm

CCT RGB



### LUMINOUS INTENSITY DISTRIBUTION

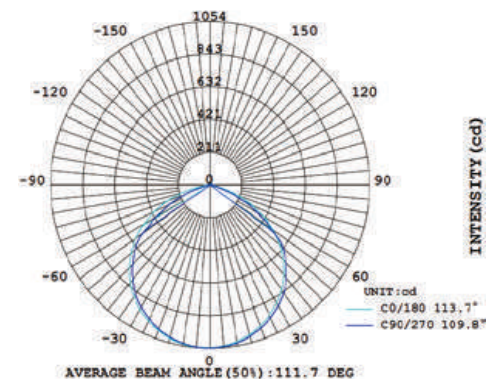

Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: info@HoneywellLights-fans.com

www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC214 | 01-2025



## LED FLOOD LIGHT

HW-FL-03-50W-PS-CCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

### FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

### APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



CE IP 66



Multi Wattage Switchable



Multi Color Temperature (CCT)



Indoor Outdoor



Easy Installation

### SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-03-50W-PS-CCT	40W / 50W	3000K, 4000K, 6000K	6800 Lm / 7500 Lm	208x140x33mm	Indoor / Outdoor

### OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	110 Lm/W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



### PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C


### ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

### DIMENSIONS

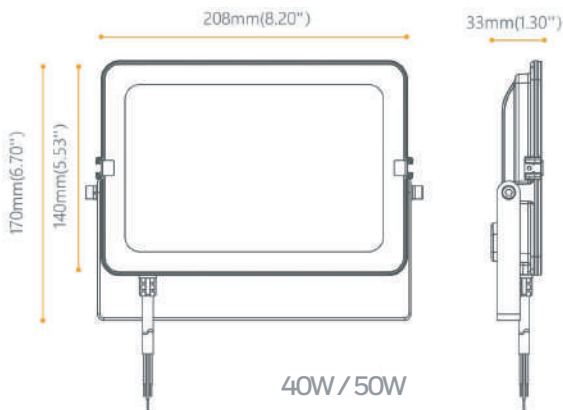


(CCT) Color Temperature Switch



Power Selectable Switch

40W 50W

### LUMINOUS INTENSITY DISTRIBUTION

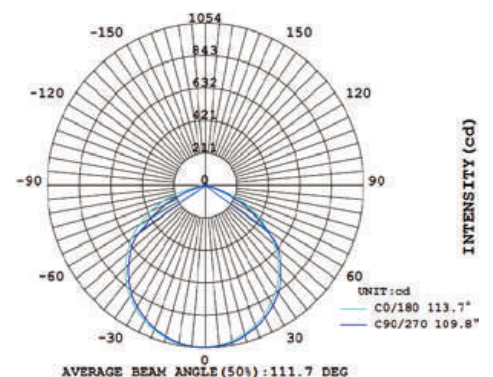

### Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
Email: info@HoneywellLights-fans.com  
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC212 | 01-2025

## LED FLOOD LIGHT

HW-FL-03-100W-PS-CCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

### FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

### APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



CE IP 66



Multi Wattage Switchable



Multi Color Temperature (CCT)



Indoor Outdoor



Easy Installation

### SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-03-100W-PS-CCT	70W / 100W	3000K, 4000K, 6000K	12 700 Lm / 14 000 Lm	266x198x35mm	Indoor / Outdoor

### OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	110 Lm/W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



### PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C


### ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO


### DIMENSIONS

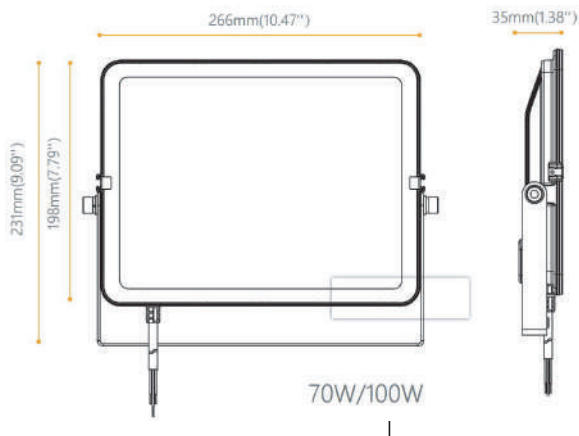


(CCT) Color Temperature Switch



Power Selectable Switch



### LUMINOUS INTENSITY DISTRIBUTION

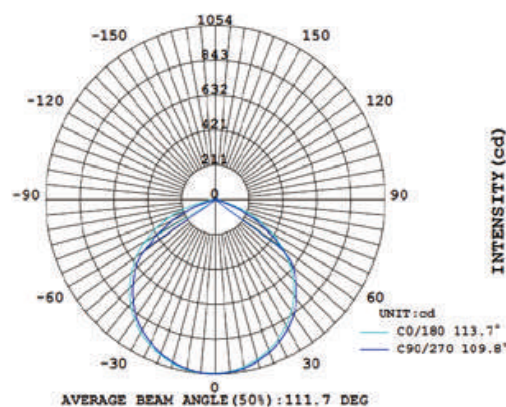

### Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
Email: info@HoneywellLights-fans.com  
www.HoneywellLights-fans.com

©2025 I LUMINACIONES TECNICAS SA. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Illuminaciones Técnicas S.A.

## LED FLOOD LIGHT

HW-FL-03-200W-PS-CCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

### FEATURES

- Powerful and ideal for working at heights
- IP66
- No UV emissions
- High uniform lighting

### APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



Multi Wattage Switchable



Multi Color Temperature (CCT)



Indoor Outdoor



Easy Installation

### SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-03-200W-PS-CCT	150W / 200W	3000K, 4000K, 6000K	25 500 Lm / 28 000 Lm	336x266x39mm	Indoor / Outdoor

### OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	110 Lm / W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



### PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C


### ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

### DIMENSIONS

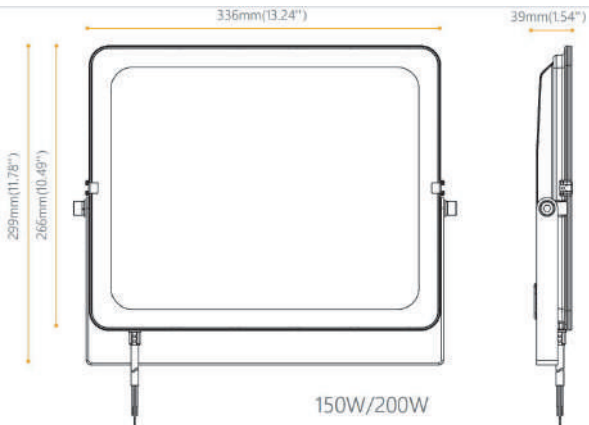


(CCT) Color Temperature Switch



Power Selectable Switch

150W 200W

### LUMINOUS INTENSITY DISTRIBUTION

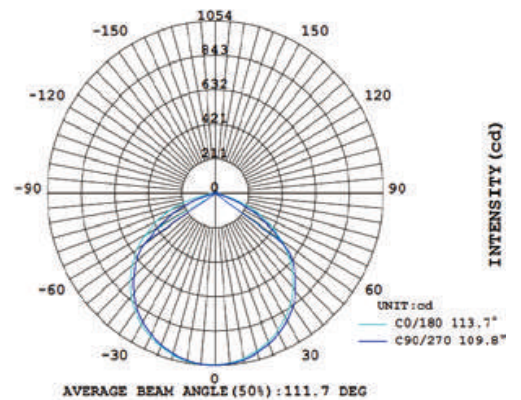

## LED STREET LIGHT

HW-ST-01-PS-CCT



LED luminaire for street and outdoor lighting, modern and compact design, uniform light projection, high efficiency, long life and easy installation, reduces energy consumption and maintenance costs.

### FEATURES

- Heavy Duty Die Cast aluminum housing with ample heat sinking.
- Angle of inclination adjustable in  $\pm 90^\circ$ .
- Slipfit Arm included
- IP65/IK08/4KV Rating.
- Long Lifespan.

### APPLICATION

#### Outdoor

- Park
- Square
- Trails
- Public or Private roads
- Parking lot
- Bridges
- Residential buildings
- And others



**PHOTOCELL  
SENSOR**



**Multi Color  
Temperature  
(CCT)**



**Multi Wattage  
Switchable**




**Eco  
Friendly**



**Water  
Proof**


OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	4000K, 5000K, 6000K	Finish	Dark Bronze	Input Power	100W, 150W, 200W
Lumens	16,856 lm/24,359 lm/30,455 lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	80x150° Type III	Dimensions (LxWxH)	300x438x62mm	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Body Frame	Die-Cast Aluminium	Frequency	50-60 Hz
Life Span	50 000 H	Weight	5.22 kg	Power Factor	>0.95
Optical Material	Diffuser PC	Operation Temperature	-40°C to +50°C	CRI	70

### DIMENSIONS | LUMINOUS INTENSITY DISTRIBUTION



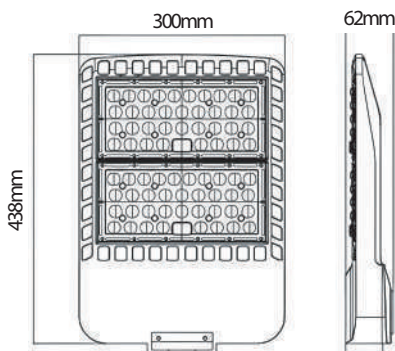


The switch selector allows customers to simply select different wattages and cct. Vent design avoid fogging and frosting.

**Power Selectable Switch**



**(CCT) Color Temperature Switch**

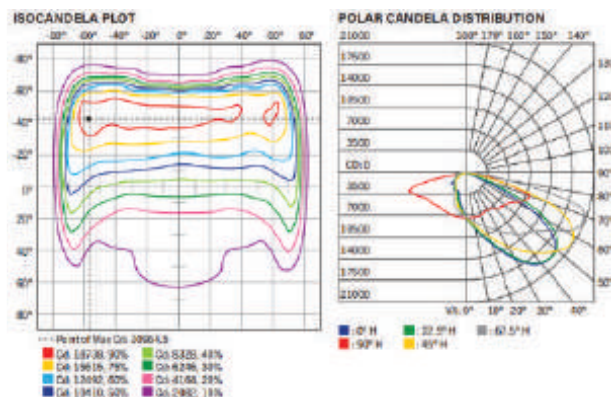

## UFO HIGHBAY

HW-UFO-01-100W-PS-CCT



Power Selectable: 3-IN-ONE, 60W, 80W, 100W  
 3 CCT Selectable: 3000K, 4000K, 6000K  
 3 beam angles Selectable: 60°, 90°, 110° with zommable optic design by simple rotation  
 Tool free Installation and Maintenance  
 The ripple-like lens cover diffuses the dazzling light generated by individual LEDs.

### FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Adjustable Beam Angle

### APPLICATION

- Factory Workshop
- Warehouse
- Parking Lot
- Conference Room
- Storage Room
- Sports Field

Indoor



CE IP65



Multi Beam Angle Switchable



Multi Wattage Switchable




Multi Color Temperature (CCT)

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	Black	Input Power	60W, 80W, 100W
Luminous Flux	10890, 13200, 16500 Lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	60°, 90°, 110° Adjustable	Dimensions	240X157 mm	Operating Voltage	100-277V
Type of Distribution	Direct Symmetrical	Type of Installation	Hanging, Ceiling, Wall	Frequency	50-60 Hz
Optical Material	Diffuser PC	Body Frame	Aluminium	Power Factor	>0.9
Life Span	50 000 Hrs	Weight	1.56 kg	CRI	80
		Operation Temperature	-30°C to +45°C	Dimmable	NO

### DIMENSIONS

### ADDITIONAL INFORMATION


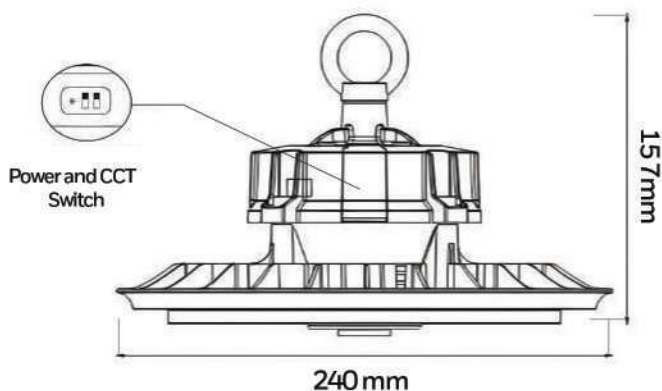


New heat dissipation system to ensure long lifetime




**UFO HIGHBAY**

HW-UFO-01-100W-PS-CCT



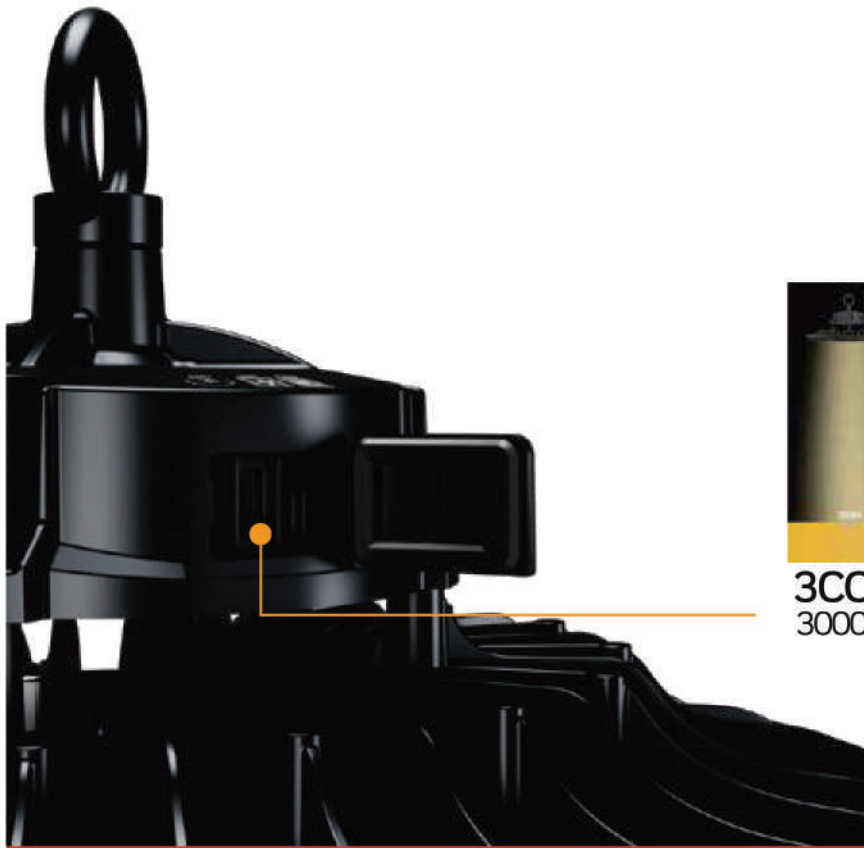


**3CCT Selectable**  
3000K, 4000K, 6000K



**3 Power-in-1**  
60W/80W/100W  
selectable

Rotate the lens to change the beam Angle

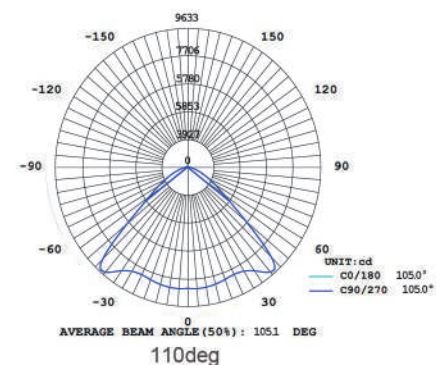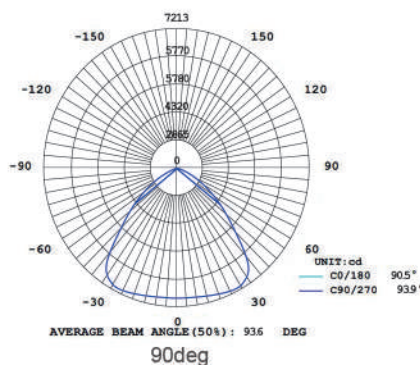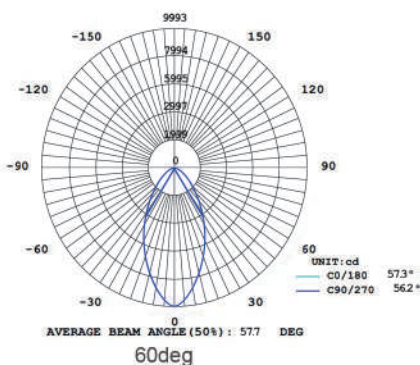

## UFO HIGHBAY

HW-UFO-01-200W-PS-CCT



Power Selectable: 3-IN-ONE, 110 W, 150 W, 200 W

3 CCT Selectable: 3000K, 4000K, 6000K

3 beam angles Selectable: 60°, 90°, 110° with zoomable optic design by simple rotation Tool free Installation and Maintenance

The ripple-like lens cover diffuses the dazzling light generated by individual LEDs.

### FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Adjustable Beam Angle

### APPLICATION

- Factory Workshop
- Warehouse
- Parking Lot
- Conference Room
- Storage Room
- Sports Field

Indoor



CE IP65



Multi Beam Angle Switchable



Multi Wattage Switchable



Multi Color Temperature (CCT)

### OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6000K
Luminous Flux	19500, 26400, 34600 Lm
Beam Angle	60°, 90°, 110° Adjustable
Type of Distribution	Direct Symmetrical
Optical Material	Diffuser PC
Life Span	50 000 Hrs


### PHYSICAL DATA

Finish	Black
Protection Level - IP	IP 65
Dimensions	300x167mm
Type of Installation	Hanging, Ceiling, Wall
Body Frame	Aluminium
Weight	2.0 kg
Operation Temperature	-30°C to +45°C

### ELECTRICAL DATA

Input Power	110W, 150W, 200W
Power Switchable	YES
Operating Voltage	100-277V
Frequency	50-60 Hz
Power Factor	>0.9
CRI	80
Dimmable	NO

### DIMENSIONS

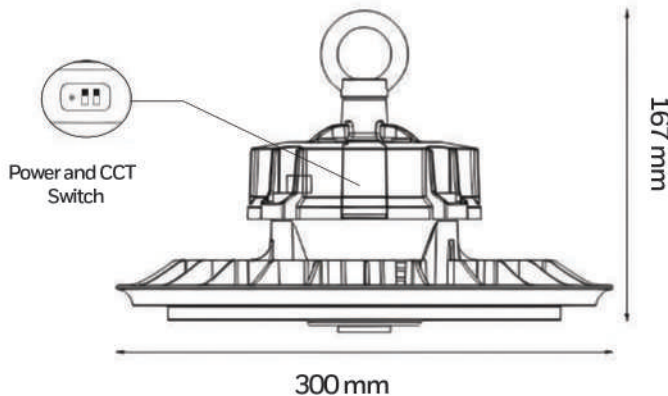



### ADDITIONAL INFORMATION

New heat dissipation system to ensure long lifetime




**UFO HIGHBAY**

HW-UFO-01-200W-PS-CCT



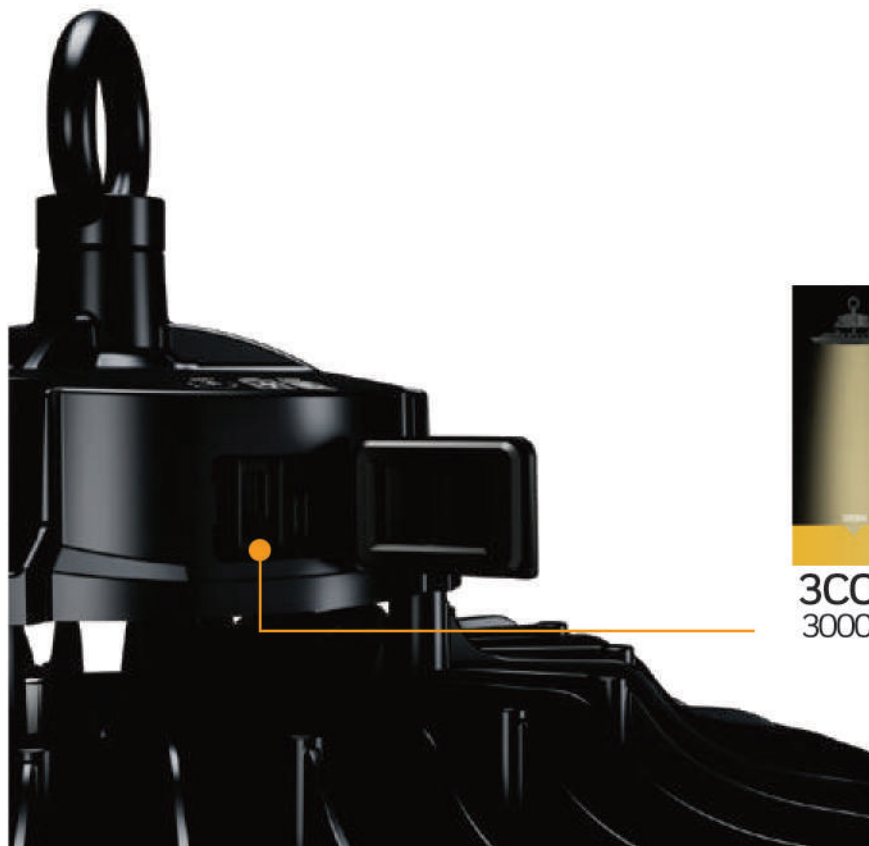


**3CCT Selectable**  
3000K, 4000K, 6000K



**3 Power-in-1**  
110W/150W/200W  
selectable

Rotate the lens to change the beam Angle

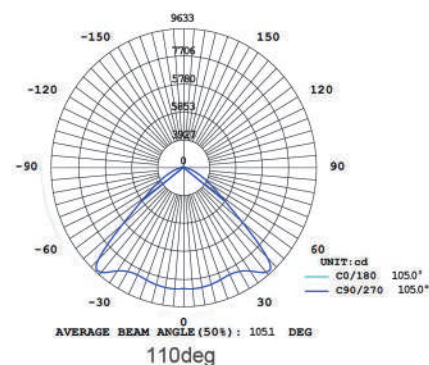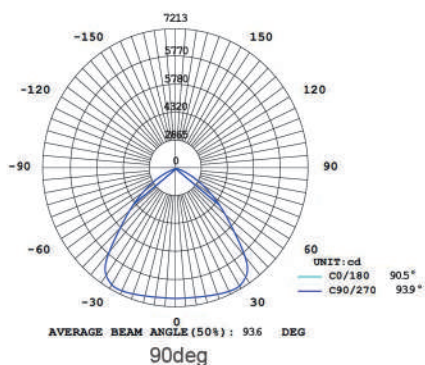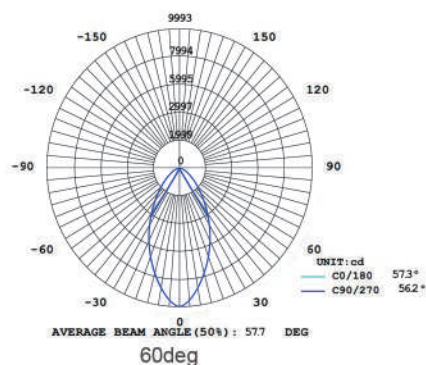





# Honeywell

## CEILING FANS 2025



**VERONA**

**APPLICATION:**

- Indoor
- Small Room (up to 10' X 10')

**BENEFITS:**

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-01-SN	Satin Nickel
HW-F-01-WH	White

**SPECIFICATIONS**

Watts (High):	42W
Volt:	100-130V
Size:	32"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	AC 153*12MM

**ENERGY INFORMATION**

Airflow (CFM):	3180
RPM (High):	250

**ADDITIONAL INFORMATION**

Blades:	Plywood
Installation:	Tri-mount
Down Length:	5" + 10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	ETL

**LIGHT SOURCE**

Number of Lamps:	1
Light Bulb Usage:	E27 Base (not included) / 40W
Capacitor:	3.5+4+6uF
Control:	3 Speed Pull chain

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



## HOOVER

### APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

### BENEFITS:

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

### CERTIFICATE:



### AVAILABLE OPTIONS:

HW-F-02-BK	Black
HW-F-02-WH	White
Also Available in:	Oil Rubbed Bronze, Brushed Nickel

### SPECIFICATIONS

Watts (High):	55W
Volt:	100-130V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	AC 153*15 mm

### ENERGY INFORMATION

Airflow (CFM) when operated at high speed:	4500
Airflow (CFM):	3105
RPM (High):	175

### ADDITIONAL INFORMATION

Blades:	Plywood Blades
Installation:	Tri-Mount
Max Ceiling Angle:	18°
Lead Wire:	20"
Reverse Airflow:	Yes
Certification:	ETL

### LIGHT SOURCE

Number of Lamps:	2
Light Bulb Usage:	E27 Base (not included)
Capacitor:	4uF/5uF/6uF
Control:	Pull chain
Switch Housing Cap:	Included

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

#### Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC301 | 01-2025



**FULTON**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-03-SN      Brushed Nickel

Also Available in:      White

**SPECIFICATIONS**

Watts (High):      54W

Volt:      100-130V

Size:      52"

Motor Finish:      Silicon Steel + Copper Wire

Motor Size:      AC 153\*15mm

**ENERGY INFORMATION**

Airflow (CFM) when operated at high speed:      4580

Airflow (CFM):      3204

RPM (High):      215

**ADDITIONAL INFORMATION**

Blades:      Plywood

Reverse Airflow:      Yes

Installation:      Tri-Mount

Down Rod:      5" + 10"

Max Ceiling Angle:      18°

Certification:      ETL

**LIGHT SOURCE**

Light Usage:      LED

Wattage:      15W

Control:      3 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432

Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)


[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC302 | 01-2025

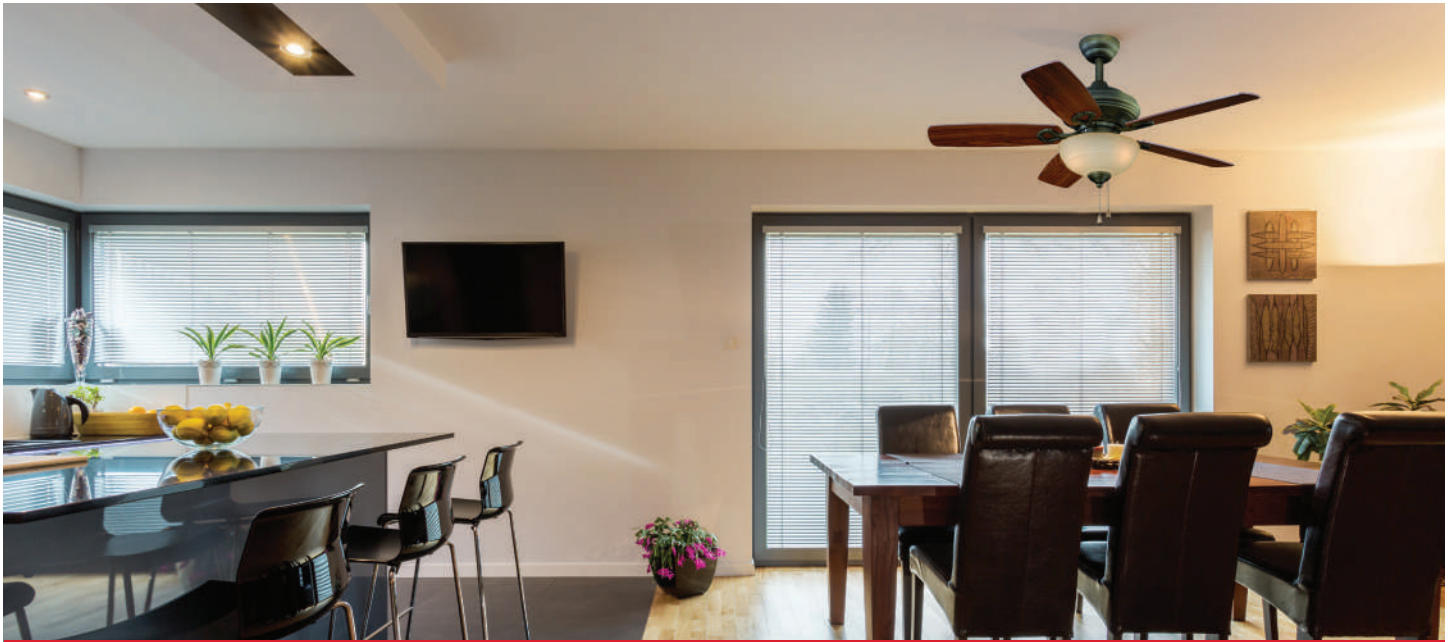

**CLANTON CEILING FAN 42"**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

- HW-F-04-ORB Oil Rubbed Bronze  
 Also Available in: Brushed Nickel

**SPECIFICATIONS**

- Watts (High): 54W  
 Volt: 100-130V  
 Size: 42"  
 Motor: Silicon Steel + Copper Wire  
 Motor Size: AC 153\*15 mm

**ENERGY INFORMATION**

- Airflow (CFM) when operated at high speed: 3500  
 Airflow (CFM): 2450  
 RPM (High): 205

**ADDITIONAL INFORMATION**

- Blades: Plywood  
 Installation: Tri-Mount  
 Down Rod: 5" + 10"  
 Max Ceiling Angle: 16°  
 Reverse Airflow: Yes  
 Certification: ETL

**LIGHT SOURCE**

- Number of Lamps: 2  
 Light Bulb Usage: E27 Base (not included) 40W Max  
 Capacitor: 3.5uF/4uF/6uF  
 Control: Pull chain  
 Watt: 40W Max

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**CALERA**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-05-BNW Brushed Nickel

**SPECIFICATIONS**

Watts (High): 56W  
 Volt: 100-130V  
 Size: 52"  
 Motor: Silicon Steel + Copper Wire  
 Motor Size: AC 153\*15MM

**ENERGY INFORMATION**

Airflow (CFM) when operated at high speed: 4530  
 RPM (High): 170

**ADDITIONAL INFORMATION**

Blades: Plywood  
 Installation: Tri-mount  
 Down Rod: 5"+10"  
 Max Ceiling Angle: 16°  
 Reverse Airflow: Yes  
 Certification: ETL  
 Control: 3 Speed Pull Chain

**LIGHT SOURCE**

Number of Lamps: 2  
 Light Bulb Usage: E27 Base (not included)  
 Capacitor: 4+5+6uF

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**FAYETTE**

## IP20

### APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

### BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

### CERTIFICATE:



### AVAILABLE OPTIONS:

HW-F-39-BK    Black

### SPECIFICATIONS

Watts (High):    40W  
 Volt:    110-240V  
 Size:    52"  
 Motor:    Silicon Steel + Copper Wire  
 Motor Size:    153\*12mm

### ENERGY INFORMATION

Airflow (CFM):    7500  
 RPM (High):    200

### ADDITIONAL INFORMATION

Blades:    Plywood  
 Installation:    Standard and Angled  
 Down Rod:    5" + 10"  
 Max Ceiling Angle:    16°  
 Certification:    CE, ETL  
 Control:    6 Speed Remote Control

### LIGHT SOURCE

Lamp:    LED 20W  
 Lumen:    1800 lm  
 Color temperature:    3000K/4000K/6000K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**ELIO**

**APPLICATION:**

- Indoor
- Small Room (up to 10' X 10')

**BENEFITS:**

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-41-SL	Silver
HW-F-41-BK	Black

**SPECIFICATIONS**

Watts (High):	28W
Volt:	110-240V
Size:	42"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	153*10mm

**ENERGY INFORMATION**

Airflow (CFM):	4688
RPM (High):	288

**ADDITIONAL INFORMATION**

Blades:	ABS
Installation:	Tri-Mount
Down Rod:	5" + 10"
Max Ceiling Angle:	16°
Certification:	CE, ETL
Control:	6 Speed Remote Control

**LIGHT SOURCE**

Source:	LED 20W
CCT switchable:	3000K/4000K/6500K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





**CULLMAN**

**IP20**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-47-SN-SN

HW-F-47-SN-LW

**SPECIFICATIONS**

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*12mm

**ENERGY INFORMATION**

Airflow (CFM):	7300
RPM (High):	230


**ADDITIONAL INFORMATION**

Blades:	ABS Blades
Installation:	Tri-mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	ETL, CE

**LIGHT SOURCE**

Lamp:	Led 20W
Color temperature:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

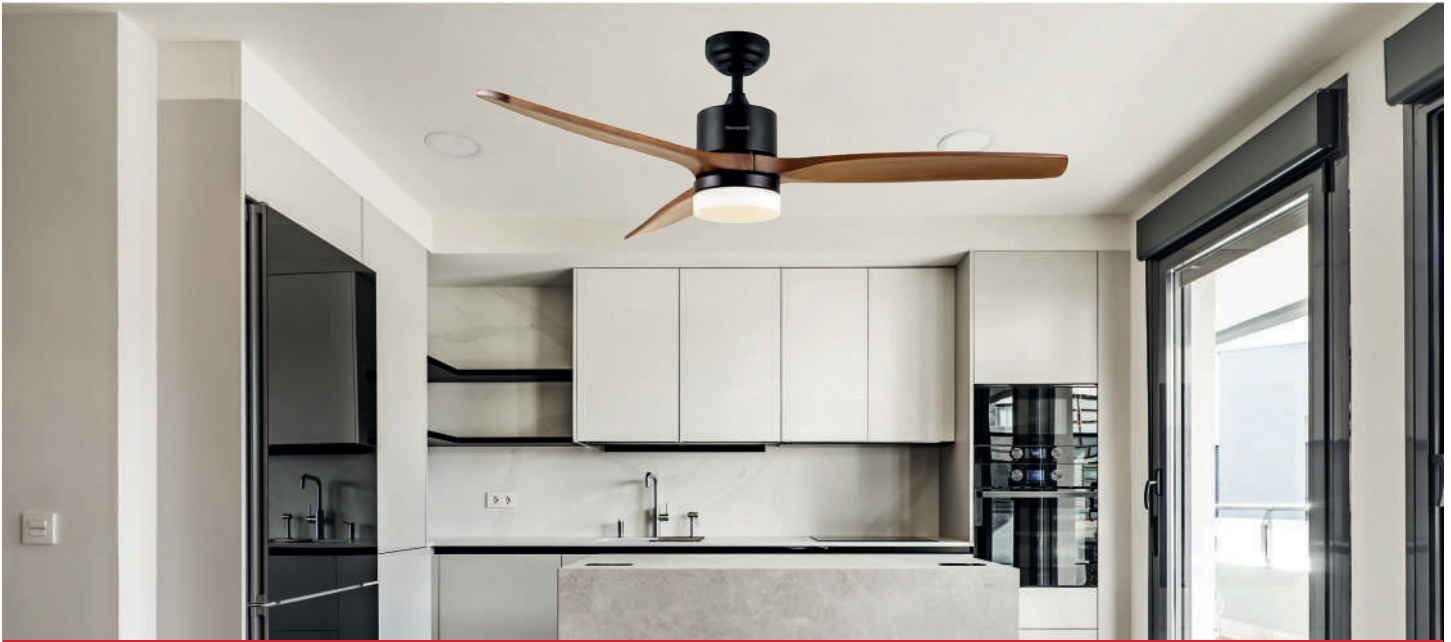

**FLORENCE**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-50-DW      Dark Wood

**SPECIFICATIONS**

Watts (High):      41W  
 Volt:                    110-240V  
 Size:                    52"  
 Motor:                  Silicon Steel + Copper Wire  
 Motor Size:          DC 153\*12mm

**ENERGY INFORMATION**

Airflow (CFM):      6500  
 RPM (High):        210

**ADDITIONAL INFORMATION**

Blades:                    Solid Wood  
 Installation:            Tri-mount  
 Down Length:         5'+10"  
 Max Ceiling Angle:    16°  
 Reverse Airflow:        Yes  
 Certification:            ETL, CE

**LIGHT SOURCE**

Source:                    LED 20W  
 Control:                  6 Speed Remote Control  
 CCT Switchable:        3000K/4000K/6000K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**DULUTH**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-51-SN: Satin Nickel

**SPECIFICATIONS**

Watts (High): 38W  
 Volt: 110-240V  
 Size: 52"  
 Motor: Silicon Steel + Copper Wire  
 Motor Size: DC 153\*12mm

**ENERGY INFORMATION**

Airflow (CFM): 7260  
 RPM (High): 200

**ADDITIONAL INFORMATION**

Blades: Plywood  
 Installation: Tri-mount  
 Down Rod: 5"+10"  
 Max Ceiling Angle: 16°  
 Reverse Airflow: Yes  
 Certification: ETL, CE

**LIGHT SOURCE**

Source: LED 20W  
 CCT switchable: 3000K/4000K/6000K  
 Control: 6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**OXFORD**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-52-WH	White
HW-F-52-BK	Black

**SPECIFICATIONS**

Watts (High):	38W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*15mm

**ENERGY INFORMATION**

Airflow (CFM):	6379
RPM (High):	127

**ADDITIONAL INFORMATION**

Blades:	ABS Blades
Installation:	Tri-mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	ETL, CE

**LIGHT SOURCE**

Source:	LED 20W
CCT switchable:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**BUTLER**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-53-WH      White

**SPECIFICATIONS**

Watts (High):      36W  
 Volt:                      110-240V  
 Size:                      52"  
 Motor Finish:      Silicon Steel + Copper Wire  
 Motor Size:              DC 153\*12mm

**ENERGY INFORMATION**

Airflow (CFM):      7600  
 RPM (High):          225

**ADDITIONAL INFORMATION**

Blades:                      ABS  
 Installation:              Tri-mount  
 Down Rod:                  5"+10"  
 Max Ceiling Angle:      16°  
 Reverse Airflow:          Yes  
 Certification:              ETL, CE

**LIGHT SOURCE**

Lamp:                          Led 20W CCT  
 Color temperature:      3000K/4000K/6000K  
 Control:                      6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**ANNISTON**

**APPLICATION:**

- Indoor or Outdoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**IP44**



**AVAILABLE OPTIONS:**

HW-F-54-WH White

**SPECIFICATIONS**

Watts (High): 40W  
 Volt: 110-240V  
 Size: 52"  
 Motor Finish: Silicon Steel + Copper Wire  
 Motor Size: DC 153\*12mm

**ENERGY INFORMATION**

Airflow (CFM): 7300  
 RPM (High): 205

**ADDITIONAL INFORMATION**

Blades: ABS  
 Installation: Tri-mount  
 Down Rod: 5"+10"  
 Max Ceiling Angle: 16°  
 Reverse Airflow: Yes  
 Certification: ETL, CE

**LIGHT SOURCE**

Lamp: Led 20W  
 Color temperature: 3000K/4000K/6000K  
 Control: 6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**PORTLAND**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-70-DW      Dark wood

**SPECIFICATIONS**

Watts (High):      36W  
 Volt:                    110-240V  
 Size:                    52"  
 Motor Finish:      Silicon Steel + Copper Wire  
 Motor Size:          DC 153\*10mm

**ENERGY INFORMATION**

Airflow (CFM):      6695  
 RPM (High):        170

**ADDITIONAL INFORMATION**

Blades:                    Wood  
 Installation:            Standard & Angled  
 Down Rod:              5"+10"  
 Max Ceiling Angle:    16°  
 Reverse Airflow:      Yes  
 Certification:          CE

**LIGHT SOURCE**

Source:                    LED 18W  
 CCT switchable:      3000K/4000K/6000K  
 Control:                  6 Speed Remote Control

**For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)**



**ELLE**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**IP20**



**AVAILABLE OPTIONS:**

HW-F-71-SN-LW	Satin Nickel - Light Wood
HW-F-71-SN-WH	Satin Nickel - White

**SPECIFICATIONS**

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*12mm

**ENERGY INFORMATION**

Airflow (CFM):	4500
RPM (High):	210

**ADDITIONAL INFORMATION**

Blades:	Plywood
Installation:	Tri-mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	ETL, CE

**LIGHT SOURCE**

Lamp:	LED 20W
Color temperature:	Switch 3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





**LUXOR**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**IP20**



**AVAILABLE OPTIONS:**

HW-F-87-BK      Black

**SPECIFICATIONS**

Watts (High):      33W  
 Volt:                    110-240V  
 Size:                    52"  
 Motor Finish:        Silicon Steel + Copper Wire  
 Motor Size:            DC 153\*12mm

**ENERGY INFORMATION**

Airflow (CFM):      7200  
 RPM (High):         186

**ADDITIONAL INFORMATION**

Blades:                    ABS  
 Installation:            Tri-mount  
 Down Rod:              5"+10"  
 Max Ceiling Angle:    16°  
 Reverse Airflow:        Yes  
 Certification:            ETL, CE

**LIGHT SOURCE**

Source:                    LED 20W  
 CCT switchable:        3000K/4000K/6000K  
 Control:                    6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



## LUXIA

### APPLICATION:

- Indoor
- Large Room (up to 20' X 20')

### BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

### CERTIFICATE:



### AVAILABLE OPTIONS:

HW-F-104-SL-WH	Silver
HW-F-104-BK-DW	Dark Wood
HW-F-104-BK	Black
HW-F-104-WH	White

### SPECIFICATIONS

Watts (High):	40W
Volt:	110-240V
Size:	66"
Motor:	Silicon Steel + Copper Wire
Motor Size:	DC 153*20mm

### ENERGY INFORMATION

Airflow (CFM):	6100
RPM (High):	125

### ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Tri-mount
Down Rod:	5"+10"
Max Ceiling Angle:	12°
Reverse Airflow:	Yes
Certification:	ETL, CE

### LIGHT SOURCE

Source:	LED 20W
CCT switchable:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**BRISA**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



**AVAILABLE OPTIONS:**

HW-F-107-WH	White
HW-F-107-CF	Coffee

**SPECIFICATIONS**

Watts (High):	20W
Volt:	110-240V
Size:	48"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 155*8MM

**ENERGY INFORMATION**

Airflow (CFM):	6760
RPM (High):	236

**ADDITIONAL INFORMATION**

Blades:	PC
Installation:	Standard
Down Length:	8"
Reverse Airflow:	Yes

**LIGHT SOURCE**

Source:	LED 30W
CCT switchable:	3000K/4000K/6000K
Control:	5 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS SA. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC318 | 01-2025



**UFO**

**APPLICATION:**

- Indoor
- Small Room (up to 10' X 10')

**BENEFITS:**

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.
- Internal Rotative Shade.



**AVAILABLE OPTIONS:**

HW-F-108-LW	Light Wood
HW-F-108-DW	Dark Wood
HW-F-108-WH	White

**SPECIFICATIONS**

Watts (High):	13W
Volt:	110-240V
Size:	19"

**ENERGY INFORMATION**

Airflow (CFM):	5900
RPM (High):	1040

**ADDITIONAL INFORMATION**

Blades:	PC
Installation:	Ceiling Mount

**LIGHT SOURCE**

Source:	LED 43W
CCT Switchable:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**AUSTIN**

**APPLICATION:**

- Indoor
- Small Room (up to 10' X 10')

**BENEFITS:**

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



**AVAILABLE OPTIONS:**

HW-F-109-WH	White
HW-F-109-BK	Black

**SPECIFICATIONS**

Watts (High):	15W
Volt:	110-240V
Size:	16"

**ENERGY INFORMATION**

Airflow (CFM):	5800
RPM (High):	1040

**ADDITIONAL INFORMATION**

Blades:	PC
Installation:	Ceiling Mount

**LIGHT SOURCE**

Source:	LED 30W
CCT switchable:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Iluminaciones Técnicas S.A.**  
 Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.  
 The Honeywell trademark is used under license from Honeywell International Inc.  
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC319 | 01-2025



**DECKER**

**IP20**

**APPLICATION:**

- Indoor
- Small Room (up to 10' X 10')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



**AVAILABLE OPTIONS:**

HW-F-110-WH	White
HW-F-110-BK	Black

**SPECIFICATIONS**

Watts (High):	35W
Volt:	110-240V
Size:	42"
Motor Size:	122*10mm

**ENERGY INFORMATION**

Airflow (CFM):	5400
RPM (High):	240

**ADDITIONAL INFORMATION**

Blades:	PC
Installation:	Ceiling + Angled Mount
Down Rod:	5"+10"
Reverse Airflow:	Yes

**LIGHT SOURCE**

Source:	LED 24W
CCT switchable:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**BIRNEY**

**APPLICATION:**

- Indoor
- Small Room (up to 10' X 10')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

IP20



**AVAILABLE OPTIONS:**

HW-F-111-CF	Coffee
HW-F-111-WH-DW	White-Dark Wood

**SPECIFICATIONS**

Watts (High):	35W
Volt:	110-240V
Size:	42"
Motor Size:	122*10mm

**ENERGY INFORMATION**

Airflow (CFM):	5400
RPM (High):	240

**ADDITIONAL INFORMATION**

Blades:	PC
Installation:	Ceiling Mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes

**LIGHT SOURCE**

Source:	LED 24W
Control:	Remote Control Included
CCT Switchable:	3000K/4000K/6000K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**CARNEY**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



**AVAILABLE OPTIONS:**

HW-F-112-BK	Black
HW-F-112-WH	White
HW-F-112-SN	Satin Nickel

**SPECIFICATIONS**

Watts (High):	37W
Volt:	110-240V
Size:	52"
Motor Size:	153*15mm

**ENERGY INFORMATION**

Airflow (CFM):	7300
RPM (High):	175

**ADDITIONAL INFORMATION**

Blades:	ABS
Installation:	Ceiling + Angled Mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes

**LIGHT SOURCE**

Source:	LED 32W
CCT switchable:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





**MEMPHIS**

**APPLICATION:**

- Indoor or Outdoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-113-BK	Black
HW-F-113-WH	White

**SPECIFICATIONS**

Watts (High):	31W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*10mm

**ENERGY INFORMATION**

Airflow (CFM):	6700
RPM (High):	210

**ADDITIONAL INFORMATION**

Blades:	ABS
Installation:	Standard & Angled
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	CE

**LIGHT SOURCE**

Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**ZANE**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-114-BK	Black
HW-F-114-WH	White
HW-F-114-DW	Dark Wood

**SPECIFICATIONS**

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*10mm

**ENERGY INFORMATION**

Airflow (CFM):	6400
RPM (High):	210

**ADDITIONAL INFORMATION**

Blades:	ABS
Installation:	Standard & Angled
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	CE

**LIGHT SOURCE**

Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**FLORIDA**

**APPLICATION:**

- Indoor or Outdoor
- Large Room (up to 15x15')

**BENEFITS:**

- Improved environmental performance.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**IP44**



**AVAILABLE OPTIONS:**

- |             |       |
|-------------|-------|
| HW-F-115-BK | Black |
| HW-F-115-WH | White |

**SPECIFICATIONS**

- |               |                             |
|---------------|-----------------------------|
| Watts (High): | 36W                         |
| Volt:         | 110-240V                    |
| Size:         | 52"                         |
| Motor Finish: | Silicon Steel + Copper Wire |
| Motor Size:   | DC 153x10mm                 |

**ENERGY INFORMATION**

- |                |      |
|----------------|------|
| Airflow (CFM): | 6560 |
| RPM (High):    | 210  |

**ADDITIONAL INFORMATION**

- |                    |                        |
|--------------------|------------------------|
| Blades:            | ABS                    |
| Installation:      | Standard & Angled      |
| Down Rod :         | 5"+10"                 |
| Max Ceiling Angle: | 15°                    |
| Certification:     | CE                     |
| Control:           | 6 Speed Remote Control |

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**BUFFALO**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-116-DW

**SPECIFICATIONS**

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor:	Silicon Steel + Copper Wire
Motor Size:	DC 153*10mm

**ENERGY INFORMATION**

Airflow (CFM):	6400
RPM (High):	215

**ADDITIONAL INFORMATION**

Blades:	ABS
Installation:	Standard & Angled
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	CE

**LIGHT SOURCE**

Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**ONTARIO**

**APPLICATION:**

- Indoor
- Large Room (up to 15' X 15')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

**CERTIFICATE:**



**AVAILABLE OPTIONS:**

HW-F-117-BK      Black

**SPECIFICATIONS**

Watts (High):      51W  
 Volt:                      110-240V  
 Size:                      54"  
 Motor Finish:      Silicon Steel + Copper Wire  
 Motor Size:              DC 153\*16mm

**ENERGY INFORMATION**

Airflow (CFM):      6500  
 RPM (High):              160

**ADDITIONAL INFORMATION**

Blades:                      ABS  
 Installation:              Standard & Angled  
 Down Rod:                5"+10"  
 Max Ceiling Angle:      16°  
 Reverse Airflow:        Yes  
 Certification:              CE

**LIGHT SOURCE**

Lamp:                        Led 18W  
 Color temperature:      3000K/4000K/6500K  
 Control:                    6 Speed Remote Control

**For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)**



**CEILING FAN 16.5"**

**APPLICATION:**

- Indoor
- Small Room (up to 10' X 10')

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



**AVAILABLE OPTIONS:**

HW-F-118-WH      White

**SPECIFICATIONS**

Watts (High):      12W  
 Volt:                      85-265V  
 Size:                      10"

**ADDITIONAL INFORMATION**

Blades:                      ABS  
 Installation:              E27 Socket

**LIGHT SOURCE**

Socket :                      E27  
 Lumen :                      1500 lm  
 Color temperature:      3000K/4000K/6500K  
 Control:                      3 Speed Remote Control

**For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)**



# Honeywell

## EXTENSION CORDS 2025

**INDOOR AND OUTDOOR HEAVY DUTY EXTENSION CORD**



**Indoor / Outdoor**

**1** OUTLET
**25'** FEET
**16** GAUGE
UL LISTED


**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- They allow you to use tools in the garden or workshops.
- Ideal for landscaping.
- Long lifespan.

**Highly Visible**

Orange jacket provides extra safety and prevents tripping while working in the yard.

**Common Uses**

Ideal for landscaping and powering appliances such as a shop vac, weed wacker, bush trimmer, leaf blower and electric lawn mower.

**AVAILABLE OPTIONS:**

HW-E-01-25FT

HW-E-01-50FT

HW-E-01-100FT

**ENERGY INFORMATION 100FT**

Max Power:	1625W	1250W
Voltage/Hz:	125V/50-60HZ	
Current:	13A	10A


**ADDITIONAL INFORMATION**

No. of Outlet Plug:	1
Finish:	Orange
Specification:	16 GAUGE / 3-pronged
Certificate	UL
Major Placements:	Copper, Plastic
Size:	25 / 50 /100 ft


For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



## 3 OUTLET WALL SURGE PROTECTOR EXTENDER WITH 2 USB PORT

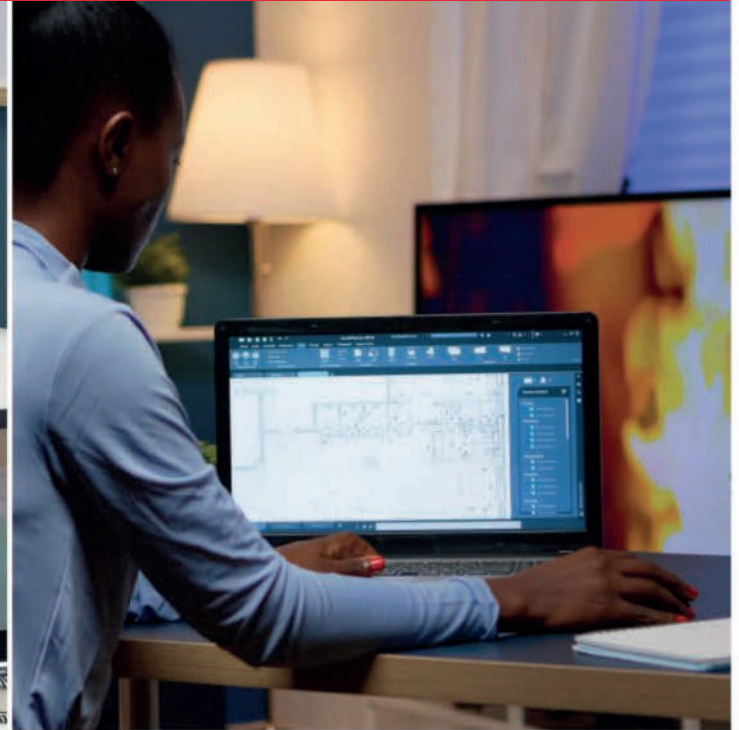

Indoor

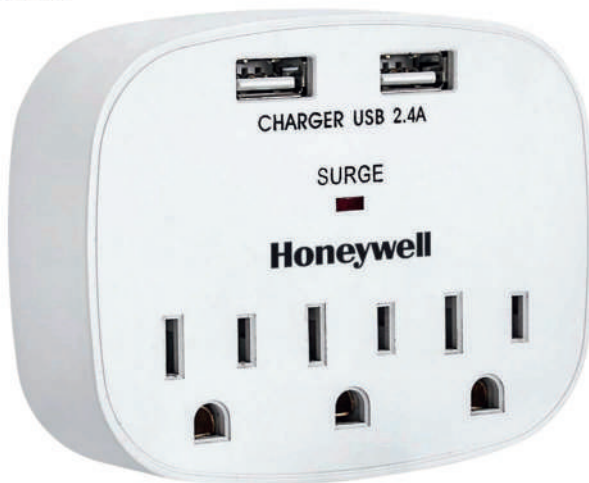

### Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

### 3 Surge Protected Outlets

Outlet adapter has 3 outlets and 2USB charging ports share 2.4A that allows you to power your electronics and charge your portable devices all in one place. Provide 300J can protect your equipments.

### Multi-functional USB Charging Station

Perfect for keeping smartphones, tablets, and other rechargeable devices at home and travel use.

### AVAILABLE OPTIONS:

HW-E-02

### ENERGY INFORMATION

Max Power: 1875W

Voltage/Hz: 125V/60HZ

Current: 15A

Surge Protect: 300J

### ADDITIONAL INFORMATION

No. of Outlet Plug: 3-outlet

Finish: White

Specification: 2USB DC5V/2.4A total

Certificate: UL

Major Placements: Copper, Plastic

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

### Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)

[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC401 | 01-2025

**6 OUTLET WALL EXTENDER**



**Indoor**



**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

**Space Saving**

Expanding your outlet can be sleek with this slim outlet adapter wall tap to power your devices.

**Power More**

Turn 2 outlets into 6-Outlet Adapter that can power your home or office electronics

**AVAILABLE OPTIONS:**

HW-E-04

**ENERGY INFORMATION**

Max Power: 1875W

Voltage/Hz: 125V/60HZ

Current: 15A

**ADDITIONAL INFORMATION**

No. of Outlet Plug: 6-outlet

Finish: White

Certificate ETL

Major Placements: Copper, Plastic

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432

Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)

[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)


©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC402 | 01-2025

**6 OUTLET SURGE PROTECTOR POWER STRIP WITH LIGHTED SWITCH ON/OFF**

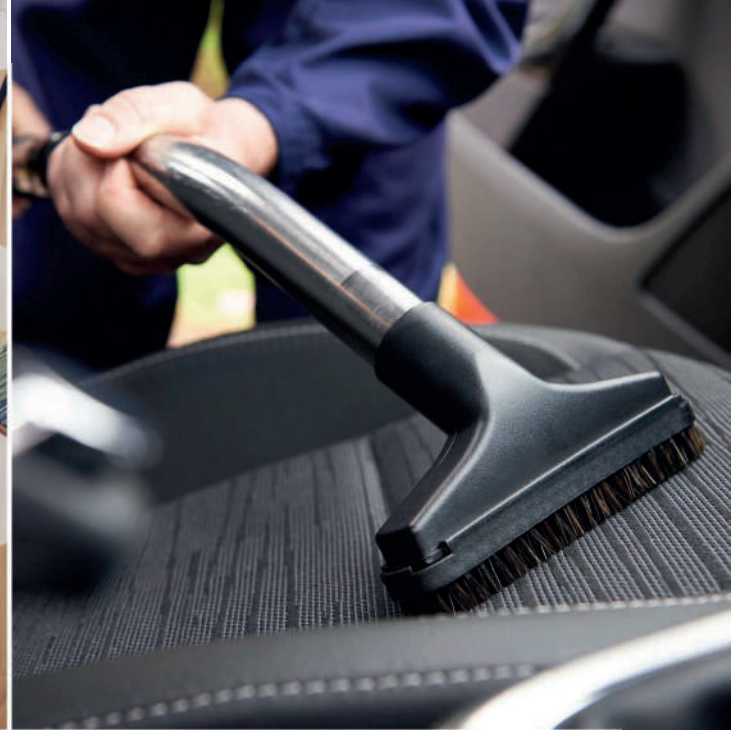

**Indoor**



**6**  
OUTLET

**350**  
JOULES

**14**  
GAUGE



**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple tools in the garage or workbench.
- Long lifespan.

**6 Surge Protected Outlets**

This power strip provide 350J can protect your equipments. Built-in 15A circuit breaker provides overload protection for safety. Lighted reset switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off).

**Common Uses**

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

**AVAILABLE OPTIONS:**

HW-E-05

**ENERGY INFORMATION**

Max Power: 1875W

Voltage/Hz: 125V/60HZ

Current: 15A

Surge Protect: 350J

**ADDITIONAL INFORMATION**

No. of Outlet Plug: 6

Finish: White

Specification: 14AWG\*3C/SJT/3FT

Certificate: ETL

Major Placements: Copper, Plastic

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**POWER STRIP WITH LIGHTED SWITCH ON/OFF**



**Indoor**



**Indoor / Outdoor**

**6**  
OUTLET

**3'**  
FEET

**14**  
GAUGE



**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple tools in the garage or workbench.
- Long lifespan.

**6 Outlets**

Industrial look and ruggedly designed with 4 compact outlets and 2 wide spacing outlets. Cord holder design for wrap the cord, with two horizontal or vertical mounting keyholes.

**Common Uses**

Bright Yellow/Black metal housing used in garage or shop workbench to operate multiple tools and equipments.

**AVAILABLE OPTIONS:**

HW-E-06

**ENERGY INFORMATION**

Max Power: 1875W

Voltage/Hz: 125V/60HZ

Current: 15A

Surge Protect: 90J

**ADDITIONAL INFORMATION**

No. of Outlet Plug: 6

Finish: Black + Yellow

Specification: 14AWG\*3C/SJT/3FT

Certificate: ETL

Major Placements: Iron, Plastic

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**3 OUTLET EXTENDER POWER STRIP AND SURGE PROTECTOR**



**Indoor**



**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

**3 Surge Protected Outlets**

With LED indicator and 3 outlets allow you to power your iPhone, Android, laptop, tablet, Nintendo Switch, Fitbit, smartwatch, Bluetooth speaker, TV, sound system or lamps in any space. Provide 450 joules can protect your equipments.

**Common Uses**

Versatile: Whether you're stuck at the airport and desperately need to charge your devices or need an extra few feet of power to reach the outlet when working remotely at the library or coffee shop.

**AVAILABLE OPTIONS:**

HW-E-07

**ENERGY INFORMATION**


Max Power:	1625W
Voltage/Hz:	125V
Current:	13A
Surge Protect:	450J

**ADDITIONAL INFORMATION**

No. of Outlet Plug:	3-outlet
Finish:	White
Specification:	16AWG*3C/SPT-2
Certificate:	ETL
Size:	3' ft

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

## 3 OUTLET SURGE PROTECTOR POWER STRIP

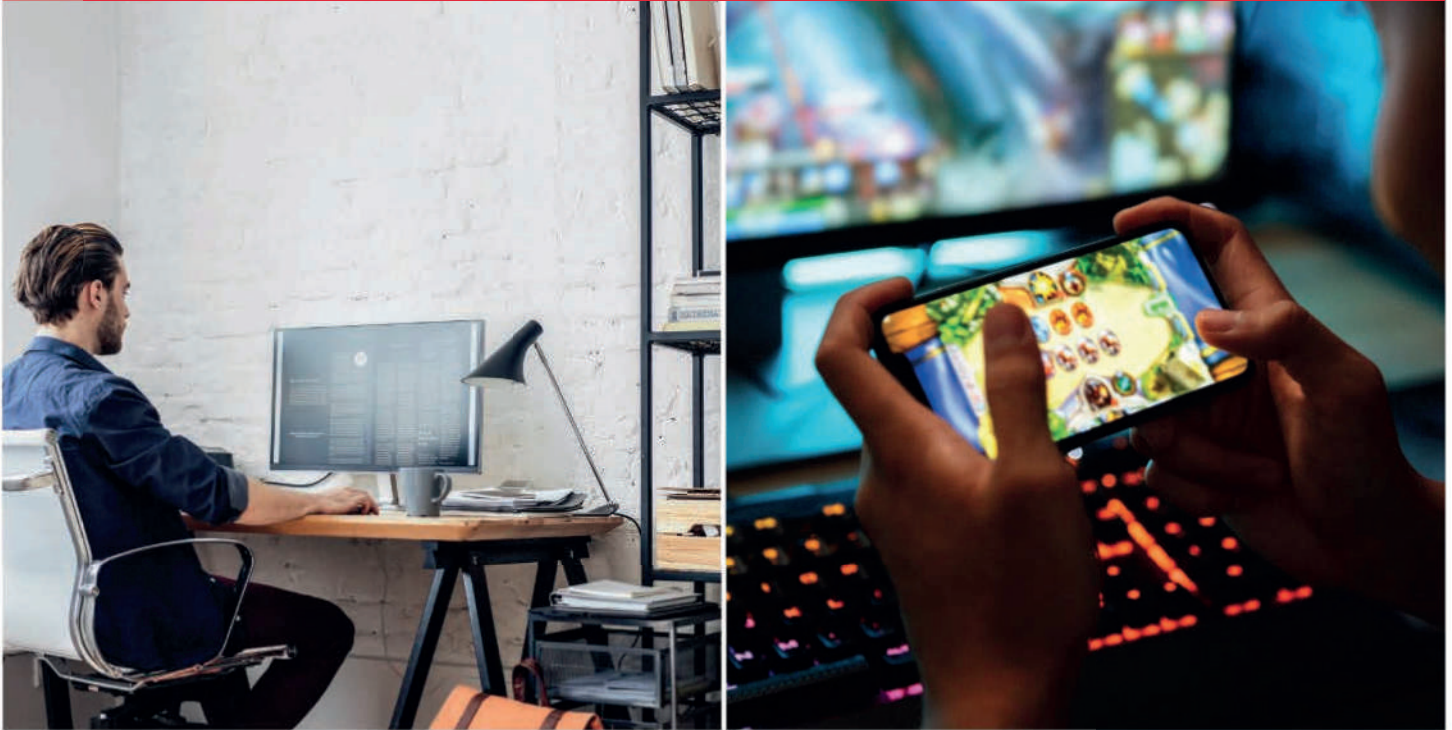

### Indoor



#### Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

#### 3 Surge Protected Outlets

With LED indicator, 3 outlets and 2USB Charging ports allow you to power your iPhone, Android, laptop, tablet, Nintendo Switch, Fitbit, smartwatch, Bluetooth speaker, TV, sound system or lamps in any space. Provide 450 joules can protect your equipments.

#### Common Uses

Versatile: Whether you're stuck at the airport and desperately need to charge your devices or need an extra few feet of power to reach the outlet when working remotely at the library or coffee shop.

#### AVAILABLE OPTIONS:

HW-E-08

#### ENERGY INFORMATION

Max Power: 1625W

Voltage/Hz: 125V

Current: 13A

Surge Protect: 450J

#### ADDITIONAL INFORMATION

No. of Outlet Plug: 3-outlet, 2 USB total 2.4A

Finish: White

Specification: 16AWG\*3C/ SPT-2

Certificate: ETL

Size: 3' ft

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

#### Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC406 | 01-2025

## 4 OUTLET POWER STRIP WITH LIGHTED SWITCH ON/OFF



Indoor



**4**  
OUTLET

**90**  
JOULES

**3'**  
FEET



### Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

### 4 Outlets

This power strip with lighted switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off). Provide 90 joules can protect your equipments.

### Common Uses

Built-in circuit breaker for safety. Perfect for home and travel use.

### AVAILABLE OPTIONS:

HW-E-09

### ENERGY INFORMATION

Max Power: 1875W  
Voltage/Hz: 125V  
Current: 15A  
Surge Protect: 90J

### ADDITIONAL INFORMATION

No. of Outlet Plug: 4-outlet  
Finish: White  
Specification: 14AWG\*3C/SJT/3FT  
Certificate: ETL  
Major Placements: Copper, Plastic

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**POWER STRIP WITH LIGHTED SWITCH ON/OFF**



**Indoor**



**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

**6 Surge Protected Outlets**

Built-in circuit breaker provides overload protection for safety, 1050J can protect your equipments. Lighted reset switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off).

**Common Uses**

Is perfect for home, entertainment centers and offices. 2USB charging ports share 2.4A are perfect for keeping tablets, smartphones, and other rechargeable devices ready to use.

**AVAILABLE OPTIONS:**

HW-E-10

**ENERGY INFORMATION**

Max Power:	1875W
Voltage/Hz:	125V/60HZ
Current:	15A
Surge Protect:	1050J

**ADDITIONAL INFORMATION**

No. of Outlet Plug:	6-outlet, 2 USB DC5V/2.4A total
Finish:	White
Specification:	14AWG*3C/SJT/3FT
Certificate	UL
Major Placements:	Copper, Plastic

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**HEAVY DUTY SURGE PROTECTOR POWER STRIP WITH LIGHTED SWITCH ON/OFF**



**Indoor**



**8**  
OUTLET

**350**  
JOULES

**14**  
GAUGE



**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple tools in the garage or workbench.
- Long lifespan.

**8 Surge Protected Outlets**

This power strip provide 350J can protect your equipments. Built-in 15A circuit breaker provides overload protection for safety. Lighted reset switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off).

**Common Uses**

Perfect for entertainment centers, offices, and anywhere multiple devices need power.

**AVAILABLE OPTIONS:**

HW-E-11

**ENERGY INFORMATION**


Max Power:	1875W
Voltage/Hz:	125V
Current:	15A
Surge Protect:	350J

**ADDITIONAL INFORMATION**

No. of Outlet Plug:	8-outlet
Finish:	White
Specification:	14AWG*3C/SJT/3FT
Certificate	ETL
Major Placements:	Copper, Plastic

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**6 OUTLET POWER STRIP WITH LIGHTED SWITCH ON/OFF**

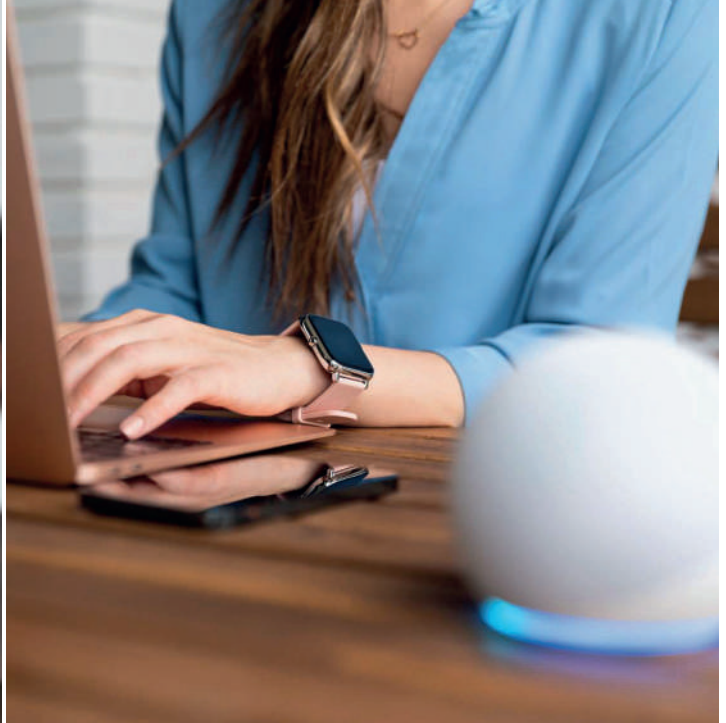

**Indoor**



**2-Pack**

**6**  
OUTLET

**3'**  
FEET

**UL**  
LISTED

**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

**6 Outlets**

This power strip with lighted switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off). Built-in circuit breaker provides overload protection for safety.

**Common Uses**

Perfect for entertainment centers, offices, and anywhere multiple devices need power.

**AVAILABLE OPTIONS:**

HW-E-12

**ENERGY INFORMATION**

Max Power: 1875W  
Voltage/Hz: 125V  
Current: 15A

**ADDITIONAL INFORMATION**

No. of Outlet Plug: 6-outlet  
Finish: White  
Specification: 14AWG\*3C/SJT  
Certificate: UL  
Size: 3' ft

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432  
Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC410 | 01-2025



**6 OUTLET WALL EXTENDER**

**Indoor**



**125**  
VOLT



**Benefits:**

- With Plug System
- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move
- Allow to operate multiple devices at office or home.
- Long lifespan

**Common Uses**

Plugs into Standard Home Outlets.  
Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

**AVAILABLE OPTIONS:**

HW-E-13

**PERFORMANCE PARAMETER**

Finish: White  
Packing: Blister

**ENERGY INFORMATION**

Max Power: 125V  
Frequency: 60Hz  
Current: 15A  
Usage: Indoor  
Certificate: ETL

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**SURGE PROTECTOR POWER STRIP LIGHTED SWITCH ON/OFF**

**Outdoor / Indoor**



**8**  
OUTLET

**90**  
JOULES

**125**  
VOLT



**Benefits:**

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move
- Long lifespan

**Surge Protector Power Strip Lighted Switch ON/OFF:**

Industrial look and ruggedly designed whit 8 compact outlets and 3 wide spacing outlets.

**Common Uses**

Bright Yellow/Black metal housing used in garage or shop workbench to charge and operate multiple tools and equipments at the same time.

**AVAILABLE OPTIONS:**

HW-E-14

**PERFORMANCE PARAMETER**

Finish: Yellow/Black  
Packing: Box

**ENERGY INFORMATION**

Max Power: 1875W  
Voltage: 125V  
Frequency: 50-60Hz  
Current: 15A  
Surge Protect: 90J  
Certificate: ETL

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**WALL EXTENDER WITH MOTION SENSOR**

**Indoor**



**Benefits:**

- With Motion Sensor
- With Night Light
- Save Energy
- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move
- Long lifespan

**Common Uses**

Allow you power your phone, laptop, tablet, video game console, smartwatch, bluetooth speaker, TV, sound system, or lamps in any space. With night light.

**AVAILABLE OPTIONS:**

HW-E-15

**PERFORMANCE PARAMETER**

Finish: White  
Packing: Blister

**ENERGY INFORMATION**

Max Power: 1875W  
Voltage: 125V-15A  
Frequency: 50-60Hz  
Usage: Indoor  
Certificate: ETL

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**1 OUTLET EXTENSION CORD**

**Indoor**



**1**  
OUTLET

**6'**  
FEET

**125**  
VOLT



**Benefits:**

- Extend range of outlets.
- Easy to install and move
- Long lifespan

**Common Uses**

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

**AVAILABLE OPTIONS:**

HW-E-16

**PERFORMANCE PARAMETER**

Finish: Gray  
 Packing: Sleeve  
 Size: 6' ft

**ENERGY INFORMATION**

Max Power: 1875W  
 Voltage: 125V  
 Current: 15A  
 Frequency: 50-60Hz  
 Usage: Indoor  
 Certificate: ETL

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**3 OUTLETS EXTENSION CORD**

**Indoor**



**3**  
OUTLET

**6'**  
FEET

**125**  
VOLT



**Benefits:**

- Extend range of outlets.
- Easy to install and move
- Long lifespan
- Thermoplastic Insulation
- Hard Service Cord

**Common Uses**

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

**AVAILABLE OPTIONS:**

HW-E-17

**PERFORMANCE PARAMETER**

Finish: White  
 Packing: Sleeve  
 Size: 6' ft

**ENERGY INFORMATION**

Max Power: 1625W  
 Voltage: 125V  
 Current: 13A  
 Frequency: 60Hz  
 Usage: Indoor  
 Certificate: ETL

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**SURGE PROTECTOR EXTENDER**

**Indoor**



**6**  
OUTLET

**1000**  
JOULES

**125**  
VOLT



**Benefits:**

- Extend range of outlets.
- Easy to install and move
- Long lifespan
- Useful for light to medium duty items
- Allow to operate multiple devices at office or home.

**Common Uses**

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

**AVAILABLE OPTIONS:**

HW-E-18

**PERFORMANCE PARAMETER**

Finish: White  
Packing: Box

**ENERGY INFORMATION**

Max Power: 1875W  
Voltage: 125V  
Current: 15A  
Frequency: 60Hz  
Usage: Indoor  
Certificate: ETL

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





**6 OUTLETS POWER STRIP**

**Indoor**



<b>6</b> OUTLET	<b>1875</b> WATTS	<b>125</b> VOLT	
--------------------	----------------------	--------------------	--

**Benefits:**

- Extend range of outlets.
- Easy to install and move
- Long lifespan
- Useful for light to medium duty items
- Allow to operate multiple devices at office or home.

**Common Uses**

Allow you to power your Phone, Laptop, Tablet, Video Game Console, Smartwatch, Bluetooth Speaker, TV, Sound System or Lamps in any space. With LED indicator.

**AVAILABLE OPTIONS:**

HW-E-19

**PERFORMANCE PARAMETER**

Finish: White  
Packing: Sleeve

**ENERGY INFORMATION**

Max Power: 1875W  
Voltage: 125V  
Current: 15A  
Frequency: 50-60Hz  
Usage: Indoor  
Certificate: UL

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



# Honeywell

## SURGE PROTECTORS 2025



**VOLTAGE PROTECTOR**



**PROTECTION FUNCTION**

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

**Common Uses**

Refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers.


A/C up to 12,000BTU (10Amp)  
A/C up to 18,000BTU (15Amp)



Voltage protector-10A  
**HW-SP-02**



Voltage protector-15A  
**HW-SP-03**

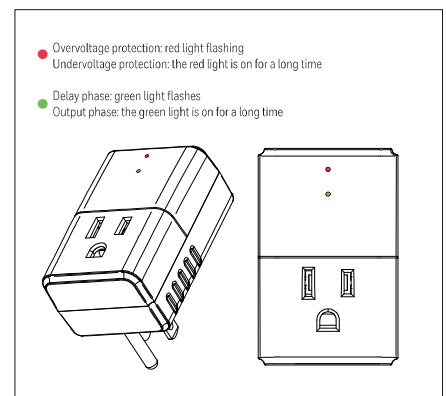

**AVAILABLE OPTIONS:**

HW-SP-02 ETL Certification

HW-SP-03

**PERFORMANCE PARAMETER**

Surge Protect: 140J

**ENERGY INFORMATION**

	HW-SP-02	HW-SP-03
Voltage:	120V	120V
Frequency:	60Hz	50/60Hz
Current:	10A	15A
Delay time:	180s	180s
Under voltage:	90V	90V
Over Voltage:	140V	140V

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).

**Illuminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432  
Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC500 | 01-2025



**VOLTAGE PROTECTOR**




**PROTECTION FUNCTION**


- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

**Common Uses**


A/C up to 30,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



HW-SP-06



HW-SP-07

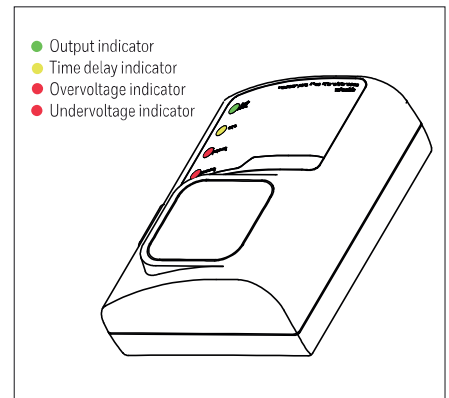

**AVAILABLE OPTIONS:**

HW-SP-06

HW-SP-07

**PERFORMANCE PARAMETER**

Color: White

**ENERGY INFORMATION**

	HW-SP-06	HW-SP-07
Voltage:	120V	220V
Frequency:	50/60Hz	50/60Hz
Current:	20A	20A
Delay time:	180s	180s
Under voltage:	90V-105V	170V-197V
Over Voltage:	140V	265V

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Illuminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC501 | 01-2025



**SURGE PROTECTOR WITH MECHANICAL TIMER**


<b>350</b> JOULES	<b>120</b> VOLT	 SURGE INDICATOR
----------------------	--------------------	--

**PROTECTION FUNCTION**

- Over / Under Voltage Protection.
- Lighting Protection.
- Phosphor copper parts.
- Flame retardant shell.

**Common Uses**

Refrigerators, TVs, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.

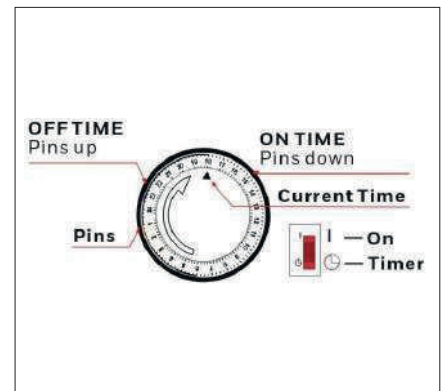

**AVAILABLE OPTIONS:**

HW-SP-08

**PERFORMANCE PARAMETER**

Finish: White  
Packing: Blister

**ENERGY INFORMATION**

Voltage:	120V
Frequency:	50/60Hz
Current:	15A
Max Loading:	1800W
Surge Protect:	350J
Time Setting:	24 Hours

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



## VOLTAGE PROTECTOR

**220**  
VOLT




### PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

### Common Uses

A/A up to 60,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.

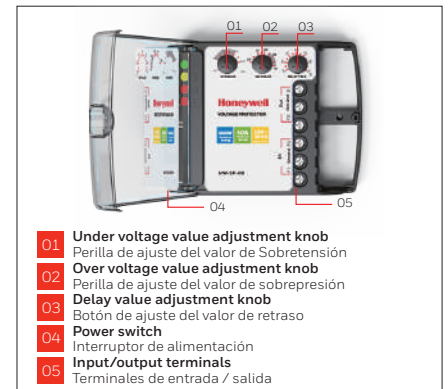

### AVAILABLE OPTIONS:

HW-SP-09


### PERFORMANCE PARAMETER

Finish: White  
Packing: Blister

### ENERGY INFORMATION

Voltage: 220V  
Frequency: 45/85Hz  
Current: 40A  
Max Loading: 8800W  
Under voltage: 170V-210V  
Over voltage: 220V-260V

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

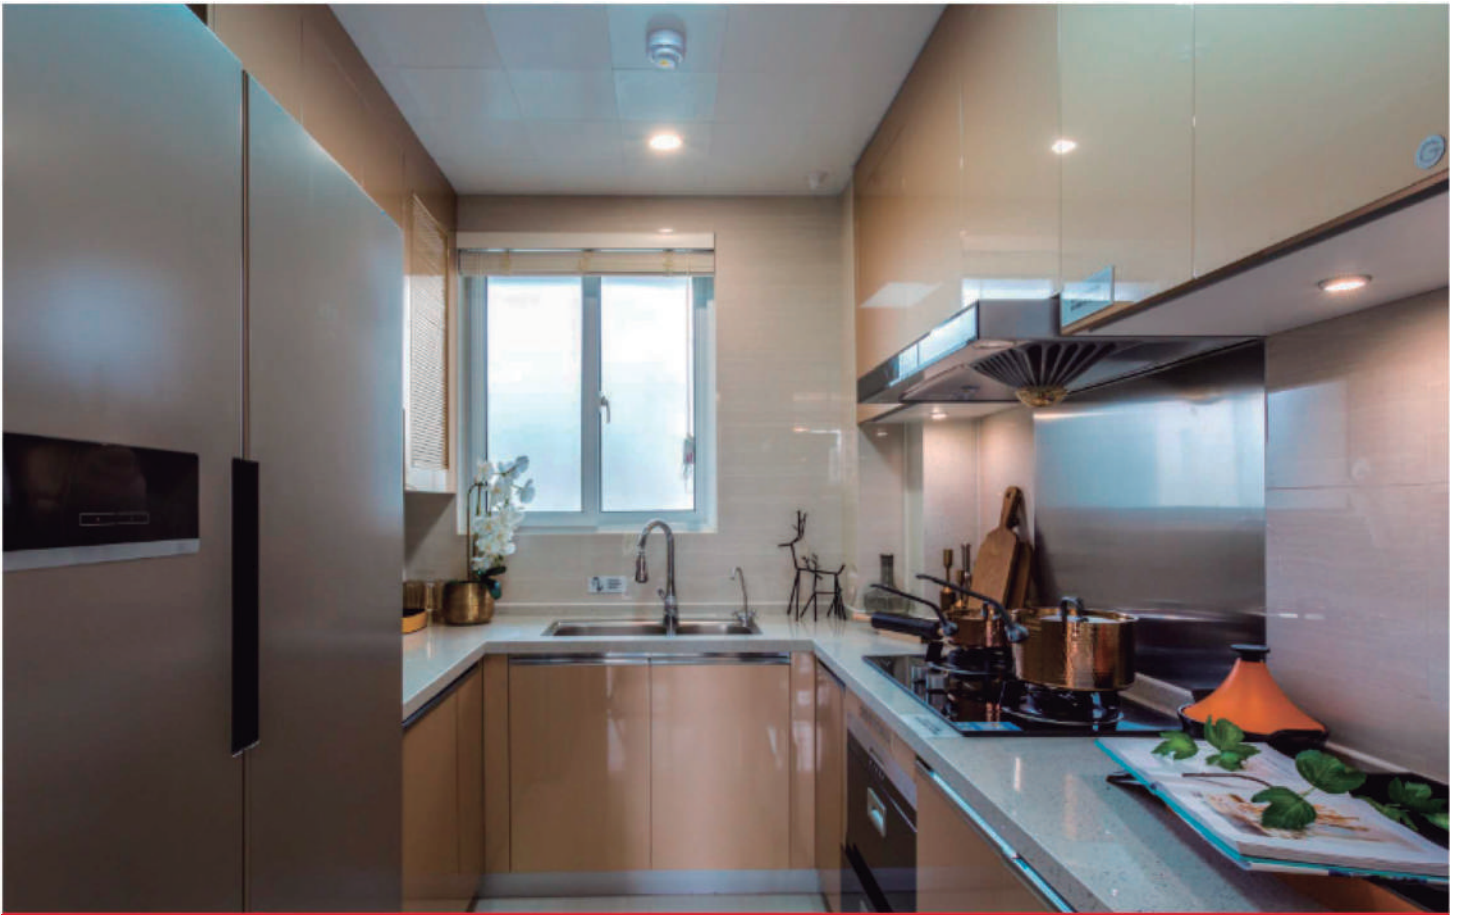

**VOLTAGE PROTECTOR**

**120**  
VOLT


**140**  
JOULES

**PROTECTION FUNCTION**

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.
- Delay time is 30s.

**Common Uses**

A/A up to 18,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.

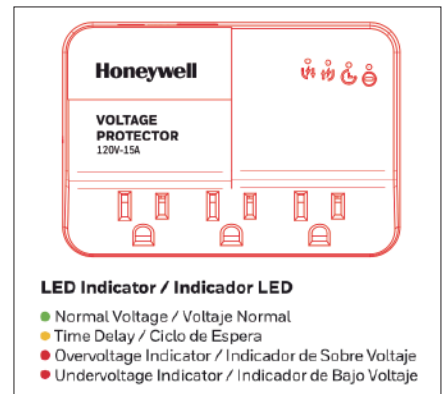

**AVAILABLE OPTIONS:**

HW-SP-10

**PERFORMANCE PARAMETER**

Finish: Black

Packing: Blister

Delay Time: 30s

**ENERGY INFORMATION**

Voltage: 120V

Frequency: 50/60Hz

Current: 15A

Surge Protection: 140J

Max Loading: 1800W

Under voltage: 90V

Over voltage: 140V

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)



**VOLTAGE PROTECTOR**



**PROTECTION FUNCTION**


- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

**Common Uses**


A/A up to 30,000BTU (HW-SP-11), A/A up to 18,000BTU (HW-SP-12), refrigerators, TVs, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



HW-SP-12

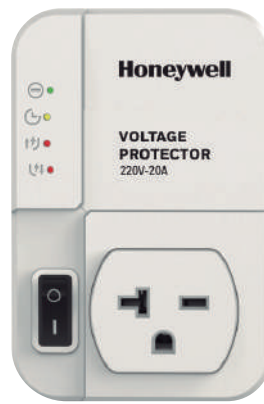

HW-SP-11

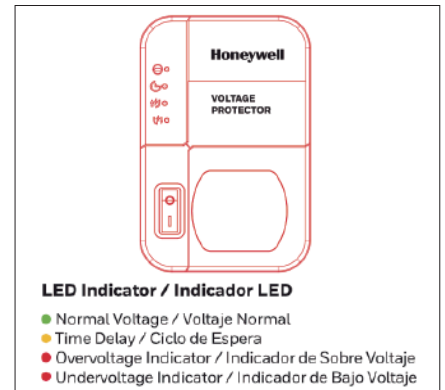

**AVAILABLE OPTIONS:**

HW-SP-11

HW-SP-12

**PERFORMANCE PARAMETER**

Finish: White

Packing: Blister

**ENERGY INFORMATION**

	HW-SP-11	HW-SP-12
Voltage:	220V	120V
Frequency:	50/60Hz	60Hz
Current:	20A	15A
Max Loading:	4400W	1800W
Under voltage:	170-197V	90-105V
Over voltage:	265V	140V

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)





# Honeywell

## SOLAR LIGHTING 2025

## SOLAR LED OUTDOOR LIGHT HW-SST-01



Solar LED lighting, unified structure that includes LED luminaire, solar panel, lithium battery. This new solar technology offers a sustainable, with a minimum of investment and maintenance by not requiring electrical point or be connected to the network.

### FEATURES

- Heavy Duty ABS + PC, Anti-UV, 94VO Fire-Proof
- Includes remote control allowing to set working modes, time and sensor settings
- Save Energy
- Longlife Span

### APPLICATION

- Residential
- Park
- Square
- Parking Lot
- Public or Private roads
- And other places lighting.

Outdoor



Solar Panel



PIR Sensors



Water Proof



Save Money



Life Span  
50,000 H

### SPECIFICATIONS

Model	Power	Lumen	Solar Panel	Charging Time	Battery Power
HW-SST-01-30W-6K	30W	162 Lm/W	7W / 6V	12 Hrs	12 000 mAh
HW-SST-01-60W-6K	60W	162 Lm/W	9W / 6V	12 Hrs	18 000 mAh
HW-SST-01-90W-6K	90W	162 Lm/W	12W / 9V	12 Hrs	24 000 mAh
HW-SST-01-150W-6K	150W	162 Lm/W	22W / 9V	10 Hrs	36 000 mAh

### OPTICAL DATA

Color Temperature (CCT)	6000 K
Beam Angle	55°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H

### PHYSICAL DATA



Finish	Black
Protection Level - IP	IP65
Body Frame	ABS + PC
Optical Material	Diffuser PC
Operation Temperature	-20°C to +50°C

### ELECTRICAL DATA


Control Remote Included	YES
Rechargeable battery	LiFePO4
RA	70
Dimmable	NO

### DIMENSIONS

Model	Size (LxWxH)
HW-SST-01-30W-6K	385x258x65mm
HW-SST-01-60W-6K	460x258x65mm
HW-SST-01-90W-6K	616x270x65mm
HW-SST-01-150W-6K	778x270x65mm

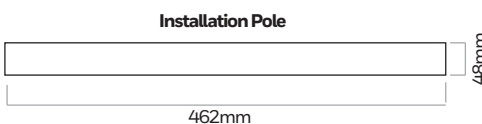

### LUMINOUS INTENSITY DISTRIBUTION

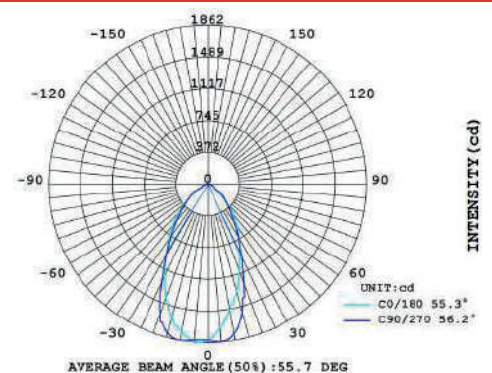

## LED FLOODLIGHT SOLAR HW-SFL-01



Outdoor

LED luminaire for street and outdoor lighting, modern and compact design, uniform light projection, high efficiency, long life and easy installation, reduces energy consumption and maintenance costs.

### FEATURES

- Heavy Duty Die Cast aluminum housing with ample heat sinking.
- LED fixture whit bracket can adjustable in 0-270 degrees.
- Control Remote Included
- Slipfit Arm included
- IP65/IK08.  
Long Lifespan.

### APPLICATION

- Park
- Square
- Trails
- Residential buildings
- Parking lot
- Bridges



### SPECIFICATIONS

Model	Power	Lumen	Solar Panel	Charging Time	Battery Power
HW-SFL-01-25W-3K	25W	162 Lm/W	8W / 6V	5 Hrs	6000 mAh
HW-SFL-01-25W-6K	25W	162 Lm/W	8W / 6V	5 Hrs	6000 mAh
HW-SFL-01-60W-6K	60W	162 Lm/W	20W / 6V	6Hrs	21 000 mAh
HW-SFL-01-100W-6K	100W	162 Lm/W	30W / 9V	5Hrs	24 000 mAh
HW-SFL-01-200W-3K	200W	162 Lm/W	35W / 9V	4 Hrs	30 000 mAh
HW-SFL-01-300W-6K	300W	162 Lm/W	35W / 9V	5 Hrs	36 000 mAh

### OPTICAL DATA

Color Temperature (CCT)	3000K or 6000K
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H

### PHYSICAL DATA


Finish	Grey
Protection Level - IP	IP65
Body Frame	Aluminium + ABS
Optical Material	Diffuser PC
Operation Temperature	0°C to +50°C

### ELECTRICAL DATA


Control Remote Included	YES
Rechargeable battery	LiFePO4
RA	70
Dimmable	NO

### DIMENSIONS

Model	Size (LxWxH)
HW-SFL-01-25W-3K	163x50x185mm
HW-SFL-01-25W-6K	163x50x185mm
HW-SFL-01-60W-6K	204x55x237mm
HW-SFL-01-100W-6K	250x55x290mm
HW-SFL-01-200W-6K	250x55x290mm
HW-SFL-01-300W-6K	250x55x290mm



### LUMINOUS INTENSITY DISTRIBUTION

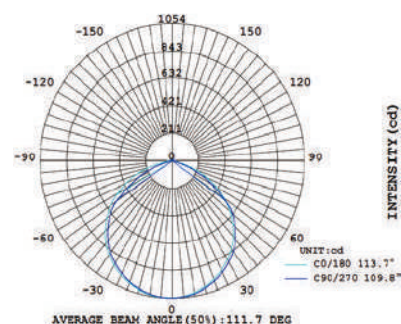



# Honeywell


## SOLAR PANEL 2025

# Honeywell

## HW-6N72HC-BF

### 560W~585W

#### MONOCRYSTALLINE MODULE

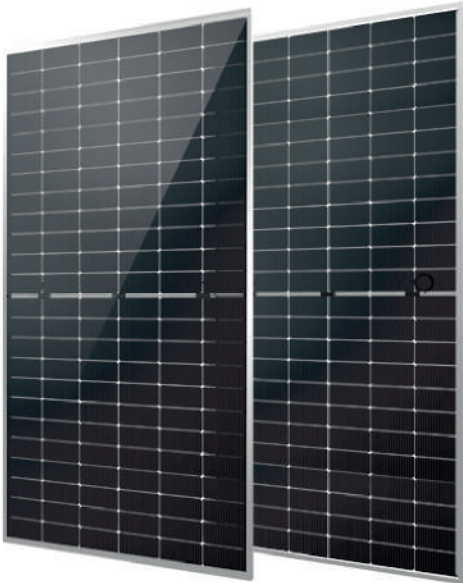

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 585W with module efficiency up to 22.64% by using the most advanced, N-Type TOPCon cell technology.
- Transparent double glass with excellent fire rating, with better temperature coefficient.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730 (2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

Passionately  
committed to  
delivering innovative  
energy solutions

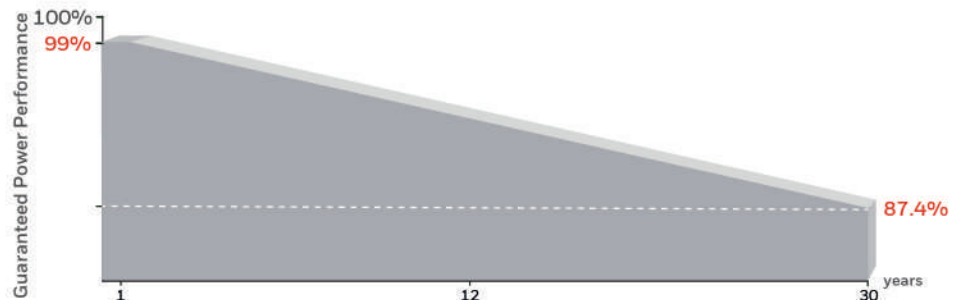

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	560W	565W	570W	575W	580W	585W
Open Circuit Voltage (V <sub>oc</sub> )	50.30V	50.45V	50.60V	50.75V	50.90V	51.10V
Short Circuit Current (I <sub>sc</sub> )	13.97A	14.04A	14.11A	14.18A	14.25A	14.31A
Maximum Power Voltage (V <sub>mp</sub> )	41.92V	42.07V	42.22V	42.37V	42.52V	42.70V
Maximum Power Current (I <sub>mp</sub> )	13.36A	13.43A	13.50A	13.57A	13.64A	13.70A
Module Efficiency (%)	21.67%	21.86%	22.06%	22.25%	22.44%	22.64%
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1500V DC					
Fire Safety Class	Class A					
Maximum Series Fuse	25 A					

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P <sub>max</sub> )	421W	425W	429W	433W	437W	441W
Open Circuit Voltage (V <sub>oc</sub> )	47.78V	47.91V	48.08V	48.17V	48.28V	48.40V
Short Circuit Current (I <sub>sc</sub> )	11.28A	11.35A	11.42A	11.48A	11.55A	11.61A
Voltage at Maximum Power (V <sub>mp</sub> )	39.45V	39.58V	39.71V	39.84V	39.95V	40.18V
Current at Maximum Power (I <sub>mp</sub> )	10.67A	10.74A	10.81A	10.87A	10.94A	11.00A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

Module Type	560M	565M	570M	575M	580M	585M
Maximum Power (Wp)	605W	610W	615W	620W	625W	630W
Open Circuit Voltage (V <sub>oc</sub> )	50.3V	50.45V	50.6V	50.75V	50.90V	51.10V
Short Circuit Current (I <sub>sc</sub> )	15.09A	15.17V	15.24A	15.32V	15.39A	15.46V
Maximum Power Voltage (V <sub>m</sub> )	41.90V	42.07V	42.22V	42.35V	42.52V	42.70V
Maximum Power Current (I <sub>m</sub> )	14.44A	14.50A	14.57A	14.64A	14.70A	14.76A

\*Bifacial=P<sub>max,Rear</sub>/Rated P<sub>max, Front</sub>

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type, bifacial (182x91mm)
Number of cells	144 (8x12x2)
Module dimensions	2278x1134x30mm
Weight	26.6kg
Front / Back cover	low-iron tempered glass 2.0 / 2.0 mm
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C


## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)

## ENGINEERING DRAWINGS

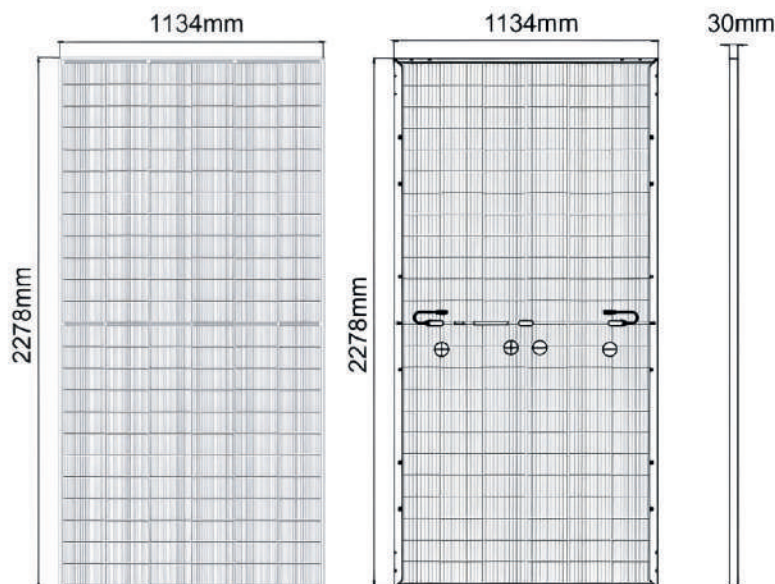

## CURRENT-VOLTAGE CURVES

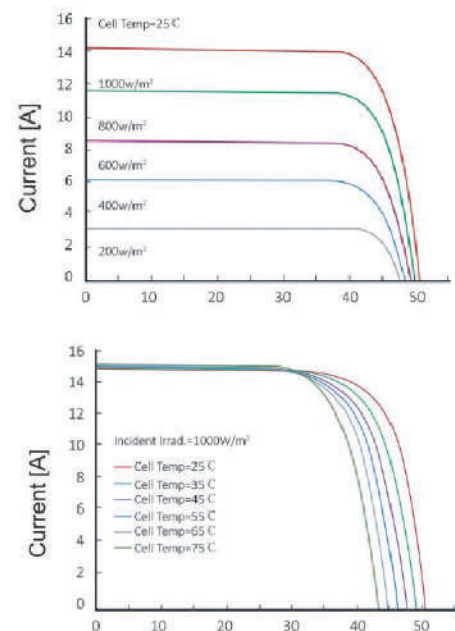

# Honeywell

## HW-6N72HC-MF

### 560W~585W

#### MONOCRYSTALLINE MODULE



#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 585W with module efficiency up to 22.65% by using the most advanced, N-Type TOPCon cell technology.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- The innovative design of low-voltage and higher string power output improves system efficiency reducing BOS cost and LCOE.

#### CERTIFICATIONS


- IEC 61215(2021), IEC 61730(2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately  
committed to  
delivering innovative  
energy solutions**

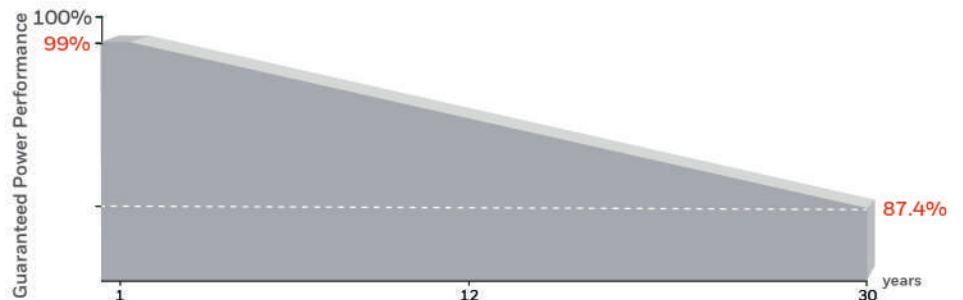

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	560W	565W	570W	575W	580W	585W
Open Circuit Voltage (V <sub>oc</sub> )	50.30 V	50.45 V	50.60 V	50.75 V	50.90V	51.10V
Short Circuit Current (I <sub>sc</sub> )	13.97 A	14.04 A	14.11 A	14.18 A	14.25 A	14.31 A
Maximum Power Voltage (V <sub>mp</sub> )	41.92V	42.07 V	42.22 V	42.37 V	42.52 V	42.70 V
Maximum Power Current(I <sub>mp</sub> )	13.36 A	13.43 A	13.50 A	13.57 A	13.64 A	13.70 A
Module Efficiency (%)	21.67 %	21.87 %	22.06 %	22.25 %	22.45 %	22.65 %
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1500V DC					
Fire Safety Class	Class C					
Maximum Series Fuse	25 A					

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P <sub>max</sub> )	421 W	425W	429 W	433 W	437 W	441 W
Open Circuit Voltage (V <sub>oc</sub> )	47.78V	47.91 V	48.08V	48.17 V	48.28V	48.40V
Short Circuit Current (I <sub>sc</sub> )	11.28 A	11.35 A	11.42 A	11.48 A	11.55 A	11.61 A
Voltage at Maximum Power (V <sub>mp</sub> )	39.45 V	39.58 V	39.71 V	39.84V	39.95V	40.18 V
Current at Maximum Power (I <sub>mp</sub> )	10.87A	10.74 A	10.81 A	10.87 A	10.94 A	11.00 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type (182x91mm)
Number of cells	144 (6x12x2)
Module dimensions	2278x1134x30mm
Weight	26.6kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	White
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C



## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)

## ENGINEERING DRAWINGS

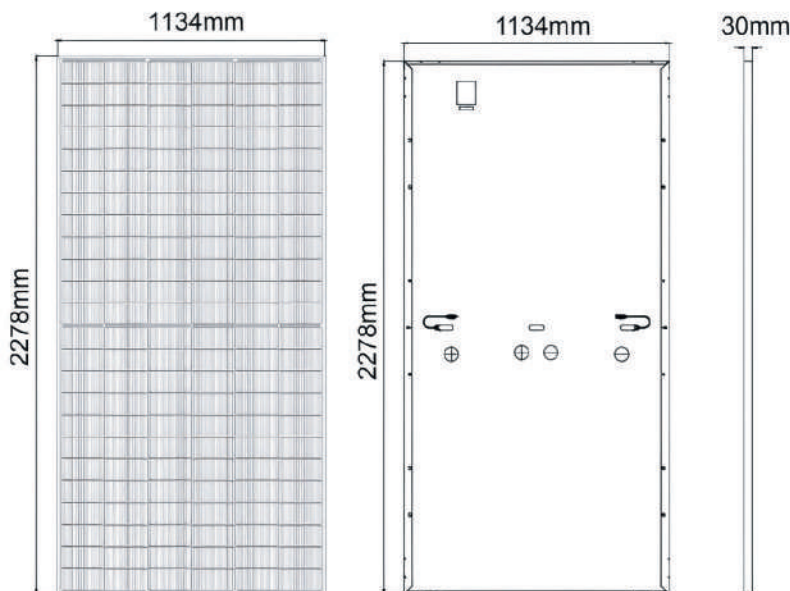

## CURRENT-VOLTAGE CURVES

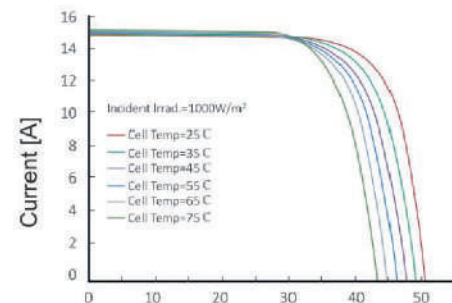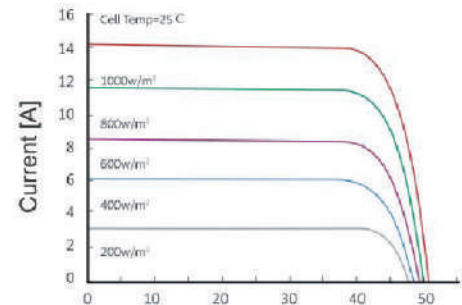





# HW-7N66HC-BF

## 600W~620W

### MONOCRYSTALLINE MODULE



#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 620W with module efficiency up to 23.00% by using the most advanced , N-Type TOPCon cell technology.
- Transparent double glass with excellent fire rating, with better temperature coefficient.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730(2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

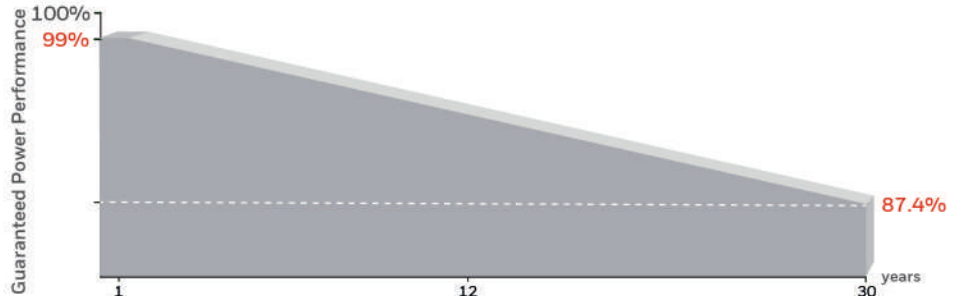

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	600W	605W	610W	615W	620W
Open Circuit Voltage (V <sub>oc</sub> )	47.70 V	47.90 V	48.10 V	48.30V	48.50 V
Short Circuit Current (I <sub>sc</sub> )	15.95 A	16.00 A	16.05 A	16.10 A	16.15 A
Maximum Power Voltage (V <sub>mp</sub> )	39.44 V	39.60 V	39.77 V	39.96 V	40.15 V
Maximum Power Current(I <sub>mp</sub> )	15.21 A	15.28 A	15.34 A	15.39 A	15.45 A
Module Efficiency (%)	22.20 %	22.40 %	22.60 %	22.80 %	23.00 %
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Safety Class	Class A				
Maximum Series Fuse	25 A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P <sub>max</sub> )	453.60 W	457.38 W	461.16 W	464.94 W	468.72 W
Open Circuit Voltage (V <sub>oc</sub> )	44.84 V	45.03 V	45.21 V	45.40 V	45.58 V
Short Circuit Current (I <sub>sc</sub> )	12.68 A	12.72 A	12.76 A	12.80 A	12.84 A
Voltage at Maximum Power (V <sub>mp</sub> )	37.27 V	37.42 V	37.58 V	37.76 V	37.94 V
Current at Maximum Power (I <sub>mp</sub> )	12.17 A	12.22 A	12.27 A	12.31 A	12.36 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

Module Type	600M	605M	610M	615M	620M
Maximum Power (Wp)	648W	653W	658W	663W	668.5W
Open Circuit Voltage (V <sub>oc</sub> )	47.7V	47.9V	48.1V	48.3V	48.5V
Short Circuit Current (I <sub>sc</sub> )	17.2A	17.26V	17.32A	17.37V	17.42A
Maximum Power Voltage (V <sub>m</sub> )	39.44V	39.6V	39.77V	39.96V	40.15V
Maximum Power Current (I <sub>m</sub> )	16.43A	16.49A	16.55A	16.6A	16.65A

\*Bifacial=P<sub>max,Rear</sub>/Rated P<sub>max, Front</sub>

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type, Bifacial (182x210mm)
Number of cells	132 (6x11x2)
Module dimensions	2382x1134x30mm
Weight	32.5kg
Front / Back cover	low-iron tempered glass 2.0 / 2.0 mm
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of V <sub>OC</sub>	-0.24%/°C
Temperature Coefficients of I <sub>SC</sub>	0.043%/°C


## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)

## ENGINEERING DRAWINGS

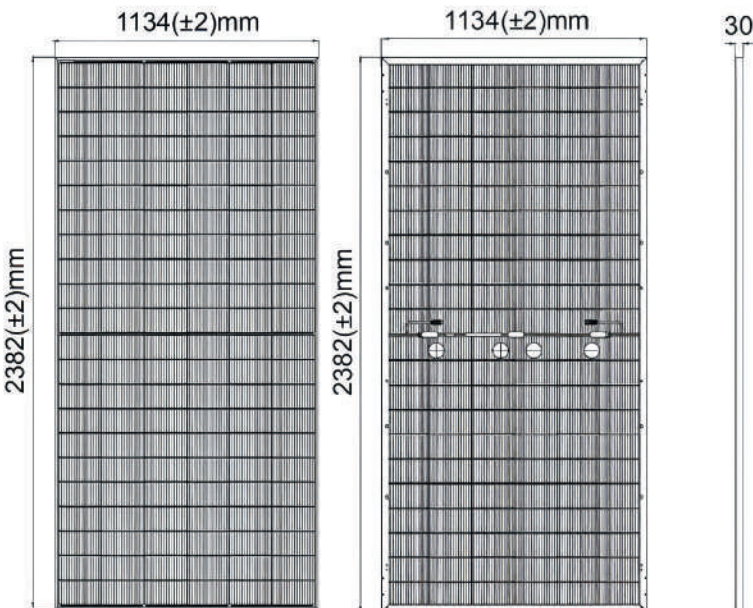


## CURRENT-VOLTAGE CURVES

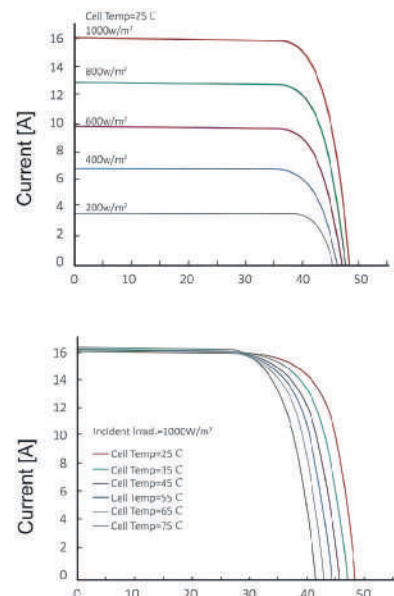

## HW-7N66HC-MF

### 600W~620W

#### MONOCRYSTALLINE MODULE

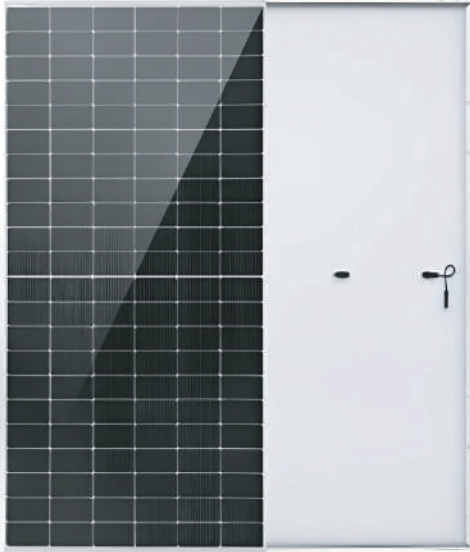

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module conversion efficiency up to 23.00% by using the most advanced N-Type TOPCon cell technology.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- Potential induced degradation (PID) free

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730 (2023), IEC 61701
- IEC61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 14001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- < 1 % First year power degradation
- 30 years linear power output warranty
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

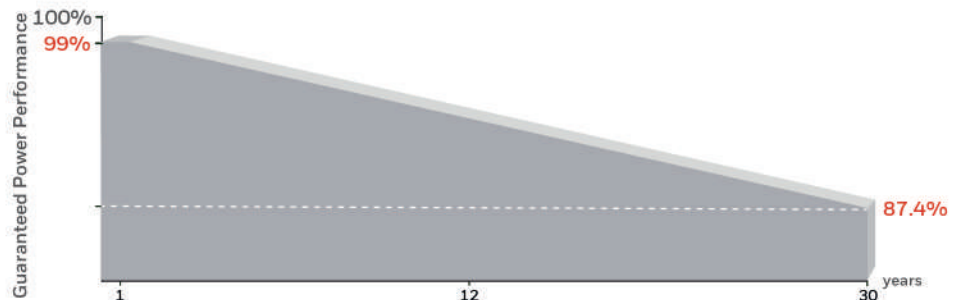

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	600W	605W	610W	615W	620W
Open Circuit Voltage (V <sub>oc</sub> )	47.7 V	47.9 V	48.1 V	48.3 V	48.5 V
Short Circuit Current (I <sub>sc</sub> )	15.95 A	16.00 A	16.05 A	16.10A	16.15A
Voltage at Maximum Power (V <sub>mp</sub> )	39.44V	39.60 V	39.77 V	39.96 V	40.15 V
Current at Maximum Power (I <sub>mp</sub> )	15.21 A	15.28 A	15.34 A	15.39 A	15.45 A
Module Efficiency (%)	22.20	22.40	22.60	22.80	23.00
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Resistance Rating	Class C				
Maximum Series Fuse Rating	30 A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P <sub>max</sub> )	453.60W	457.38W	461.16W	464.94W	468.72W
Open Circuit Voltage (V <sub>oc</sub> )	44.84V	45.03V	45.21V	45.40V	45.58V
Short Circuit Current (I <sub>sc</sub> )	12.68 A	12.72A	12.76 A	12.80A	12.84 A
Voltage at Maximum Power (V <sub>mp</sub> )	37.27 V	37.42 V	37.58 V	37.76V	37.94 V
Current at Maximum Power (I <sub>mp</sub> )	12.17A	12.22 A	12.27 A	12.31A	12.36 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type (182x210mm)
Number of cells	132 (6x11x2)
Module dimensions	2382x1134x30mm
Weight	28.5kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	TPT in white
Frame	Anodized aluminum alloy
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C


## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)

## ENGINEERING DRAWINGS

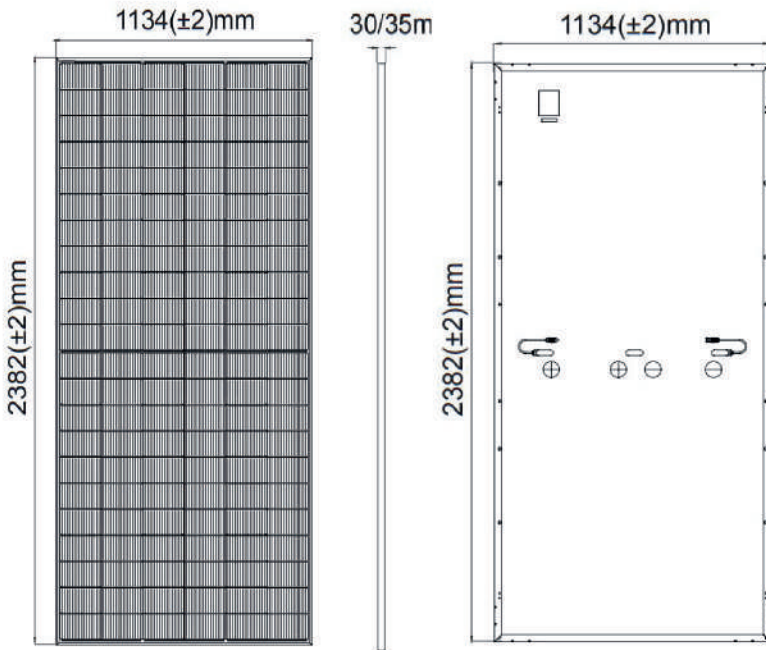

## CURRENT-VOLTAGE CURVES

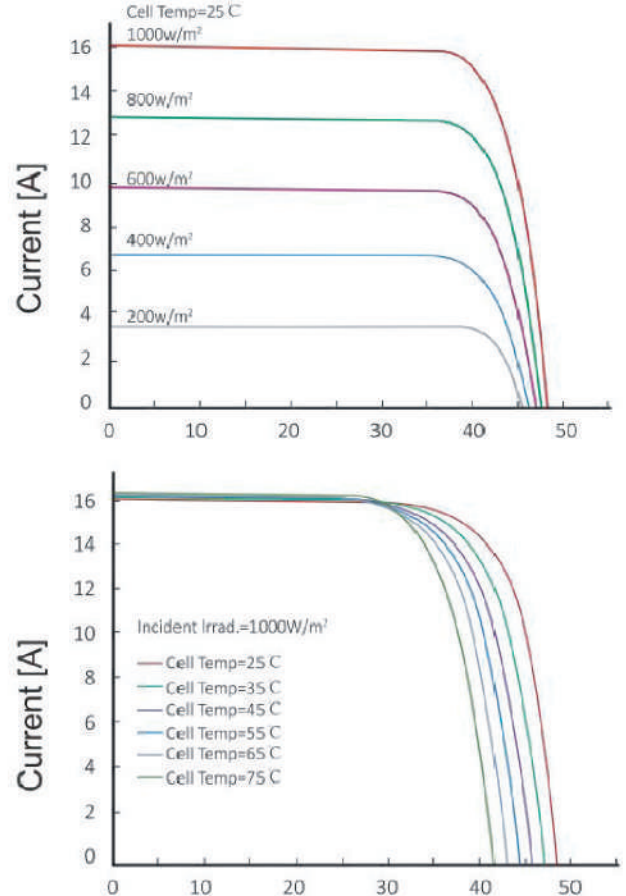



# HW-8N66HC-BF

## 695W~720W

### MONOCRYSTALLINE MODULE



#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 720W with module efficiency up to 23.18% by using the most advanced , N-Type TOPCon cell technology.
- Transparent double glass with excellent fire rating, with better temperature coefficient.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730(2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

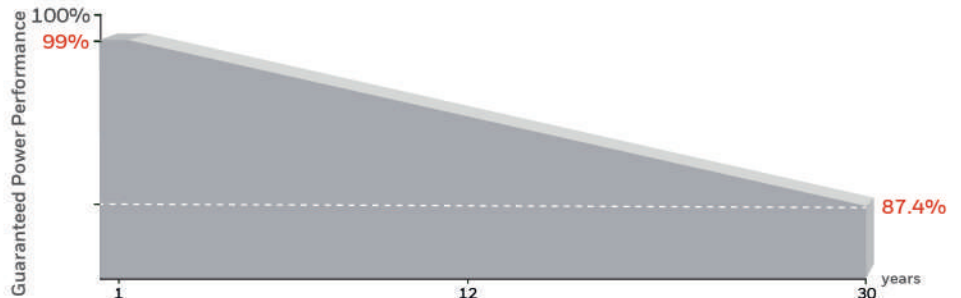

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	695W	700W	705W	710W	715W	720W
Open Circuit Voltage (V <sub>oc</sub> )	48.43 V	48.60 V	48.77 V	48.94 V	49.11 V	49.24 V
Short Circuit Current (I <sub>sc</sub> )	18.30 A	18.35 A	18.40 A	18.45 A	18.50 A	18.55 A
Maximum Power Voltage (V <sub>mp</sub> )	40.18 V	40.35 V	40.52 V	40.69 V	40.86 V	41.03 V
Maximum Power Current (I <sub>mp</sub> )	17.30 A	17.35 A	17.40 A	17.45 A	17.50 A	17.55 A
Module Efficiency (%)	22.37 %	22.53 %	22.70 %	22.86 %	23.02 %	23.18 %
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1500V DC					
Fire Safety Class	Class A					
Maximum Series Fuse	30A					

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

Module Type	695M	700M	705M	710M	715M	720M
Maximum Power (W <sub>p</sub> )	750.6W	756W	761.4W	766.8W	772.2W	777.6W
Open Circuit Voltage (V <sub>oc</sub> )	48.43V	48.6V	48.77V	48.94V	49.11V	49.28V
Short Circuit Current (I <sub>sc</sub> )	19.76A	19.82V	19.87A	19.93V	19.98A	20.03A
Maximum Power Voltage (V <sub>m</sub> )	40.18V	40.35V	40.52V	40.69V	40.86V	41.03V
Maximum Power Current (I <sub>m</sub> )	18.68A	18.74A	18.79A	18.85A	18.90A	18.95A

\*Bifacial=P<sub>max,Rear</sub>/Rated P<sub>max, Front</sub>

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type, Bifacial (210x105mm)
Number of cells	132 (6x11x2)
Module dimensions	2384x1303x33/35mm
Weight	37.7/38kg
Front / Back cover	low-iron tempered glass 2.0 / 2.0 mm
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.34%/°C
Temperature Coefficients of V <sub>OC</sub>	-0.25%/°C
Temperature Coefficients of I <sub>SC</sub>	+0.04%/°C



## PACKAGING

Standard packaging	31 pcs/pallet
Module quantity per 40' container (33mm)	594 pcs (HQ)
Module quantity per 40' container (35mm)	558 pcs (HQ)

## ENGINEERING DRAWINGS

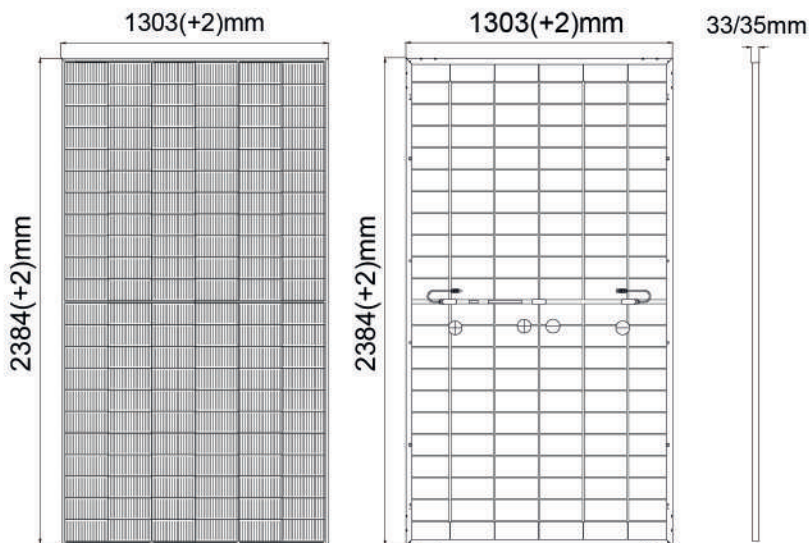

## CURRENT-VOLTAGE CURVES

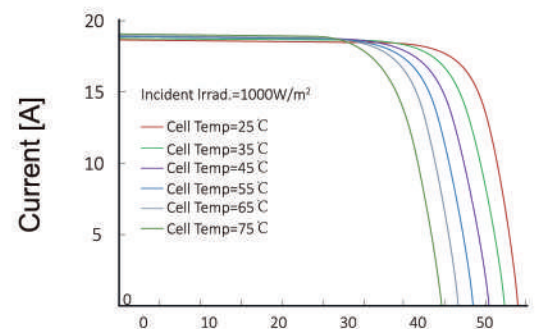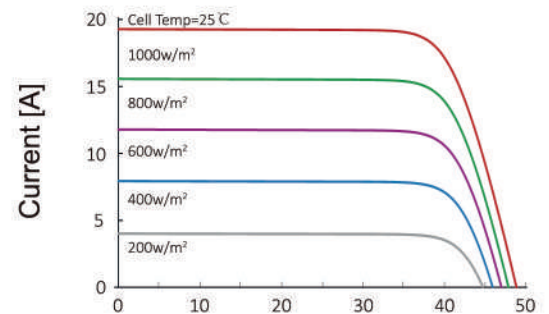



# HW-8N66HC-MF

## 695W~715W

### MONOCRYSTALLINE MODULE



#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 715W with module efficiency up to 23.02% by using the most advanced , N-Type TOPCon cell technology.
- Lower annual power degradation and high energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- The innovative design of low-voltage and higher string power output improves system efficiency reducing BOS cost and LCOE.

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730 (2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

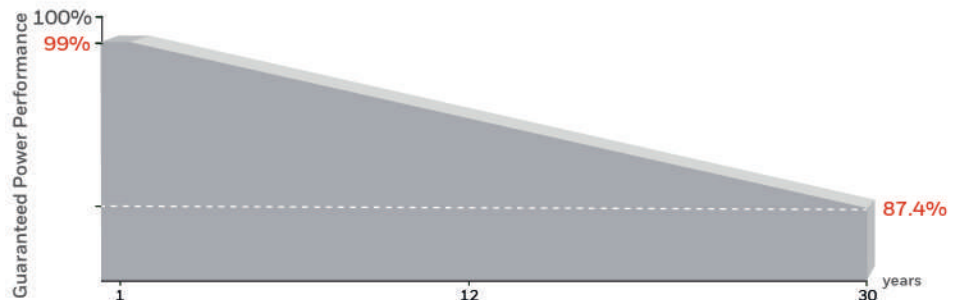

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power ( $P_{max}$ )	695W	700W	705W	710W	715W
Open Circuit Voltage ( $V_{oc}$ )	48.43 V	48.60 V	48.77 V	48.94V	49.11 V
Short Circuit Current ( $I_{sc}$ )	18.30 A	18.35 A	18.40 A	18.45 A	18.50 A
Maximum Power Voltage ( $V_{mp}$ )	40.18V	40.35 V	40.52 V	40.69 V	40.86 V
Maximum Power Current( $I_{mp}$ )	17.30 A	17.35 A	17.40 A	17.45 A	17.50 A
Module Efficiency (%)	22.37 %	22.53 %	22.70 %	22.86 %	23.02 %
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Safety Class	Class C				
Maximum Series Fuse	30 A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power ( $P_{max}$ )	523 W	526 W	530 W	534 W	538 W
Open Circuit Voltage ( $V_{oc}$ )	46.01V	46.17 V	46.33 V	46.49 V	46.65V
Short Circuit Current ( $I_{sc}$ )	14.77 A	14.82 A	14.86 A	14.90 A	14.94 A
Voltage at Maximum Power ( $V_{mp}$ )	37.44 V	37.55 V	37.73 V	37.90 V	38.08 V
Current at Maximum Power ( $I_{mp}$ )	13.97A	14.01 A	14.05 A	14.09 A	14.13 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type (210x105mm)
Number of cells	132 (6x11x2)
Module dimensions	2384x1303x33/35mm
Weight	34kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	White
Frame	Aluminum hollow-chamber frame, nodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.34%/°C
Temperature Coefficients of VOC	-0.25%/°C
Temperature Coefficients of ISC	0.04%/°C



## PACKAGING

Standard packaging	31 pcs/pallet
Module quantity per 40' container (33mm)	594 pcs (HQ)
Module quantity per 40' container (35mm)	558 pcs (HQ)

## ENGINEERING DRAWINGS

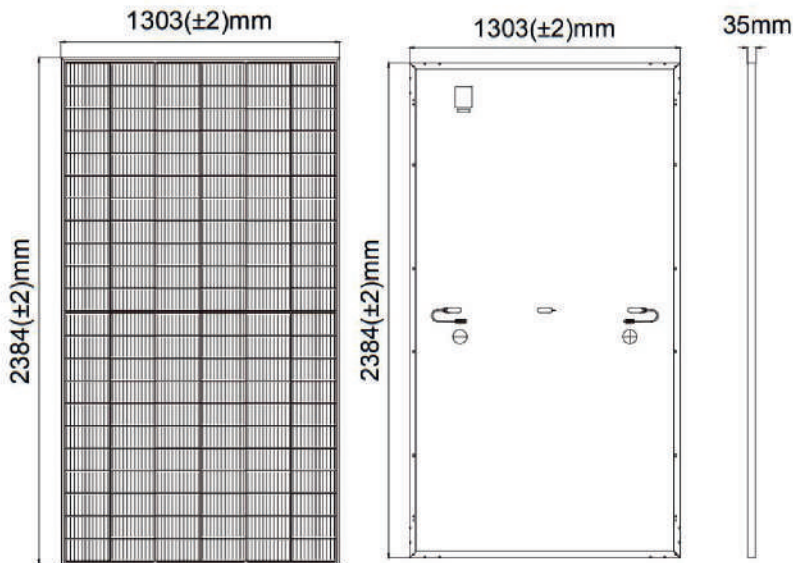

## CURRENT-VOLTAGE CURVES

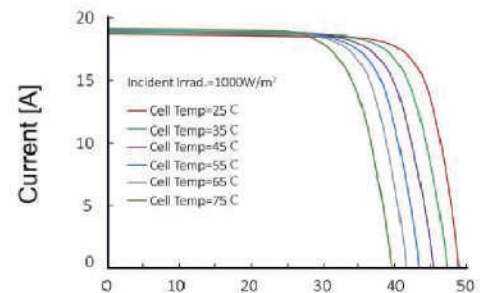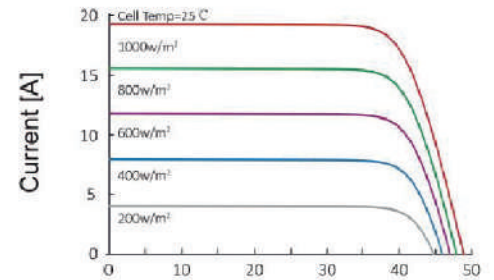






# HW-7N54HC-BF-BK

## 430W~455W

### MONOCRYSTALLINE MODULE

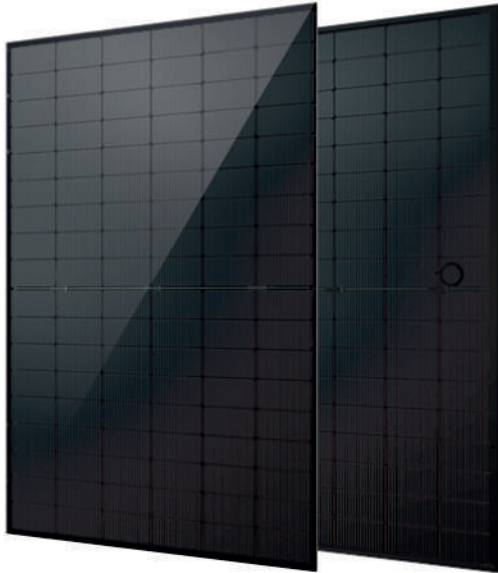

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 455W with module efficiency up to 22.8% by using the most advanced , N-Type TOPCon cell technology.
- Transparent double glass with excellent fire rating, with better temperature coefficient.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 3600Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730(2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 25 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

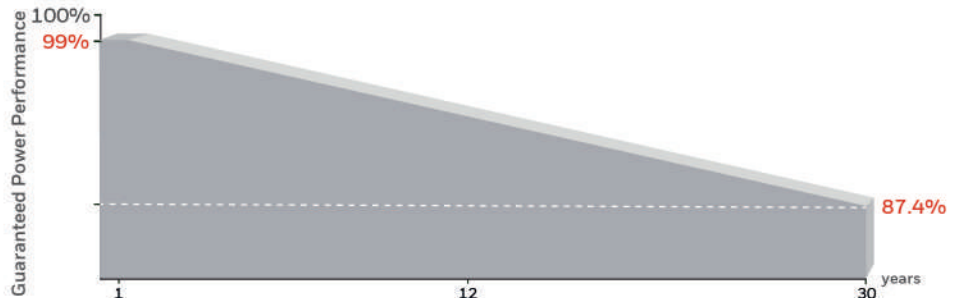

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	430W	435W	440W	445W	450W	455W
Open Circuit Voltage (V <sub>oc</sub> )	38.50V	38.70V	38.90V	39.10V	39.30V	39.50V
Short Circuit Current (I <sub>sc</sub> )	14.14 A	14.23 A	14.31 A	14.40 A	14.48 A	14.56 A
Maximum Power Voltage (V <sub>mp</sub> )	32.12 V	32.29 V	32.47 V	32.65 V	32.82 V	33.00 V
Maximum Power Current (I <sub>mp</sub> )	13.39 A	13.47 A	13.55 A	13.63 A	13.71 A	13.79 A
Module Efficiency (%)	21.50%	21.80%	22.00%	22.30%	22.50%	22.80%
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1500V DC					
Fire Safety Class	Class A					
Maximum Series Fuse	30A					

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

Module Type	430M	435M	440M	445M	450M	455M
Maximum Power (W <sub>p</sub> )	464W	470W	475W	481W	486W	491W
Open Circuit Voltage (V <sub>oc</sub> )	38.50V	38.70V	38.90V	39.10V	39.30V	39.50V
Short Circuit Current (I <sub>sc</sub> )	15.27A	15.36V	15.46A	15.55A	15.64V	15.73A
Maximum Power Voltage (V <sub>m</sub> )	32.11V	32.29V	32.47V	32.65V	32.82V	32.99V
Maximum Power Current (I <sub>m</sub> )	14.46A	14.55A	14.63A	14.72A	14.81A	14.89A

\*Bifacial=P<sub>max,Rear</sub>/Rated P<sub>max, Front</sub>

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type (182x94mm)
Number of cells	108 (6x18)
Module dimensions	1762x1134x30mm
Weight	22.5kg
Front / Back cover	low-iron tempered glass 2.0 / 2.0 mm
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy black
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	40°C±85°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of V <sub>OC</sub>	-0.26%/°C
Temperature Coefficients of I <sub>SC</sub>	0.046%/°C


## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	216 pcs
Module quantity per 40' container	936 pcs (HQ)

## ENGINEERING DRAWINGS

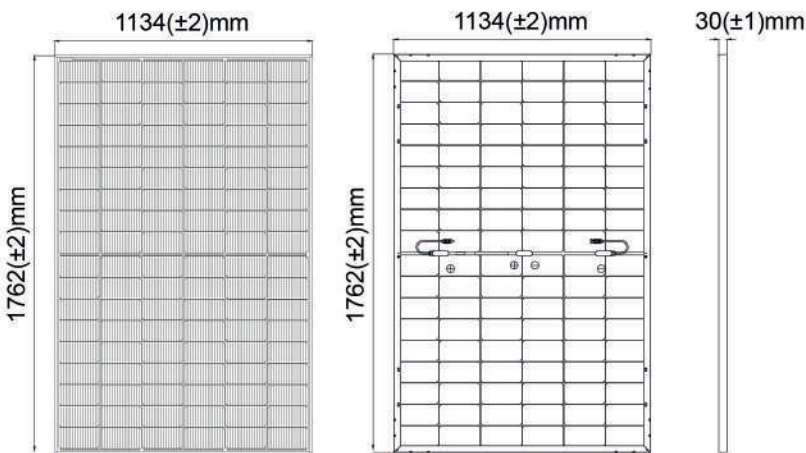

## CURRENT-VOLTAGE CURVES

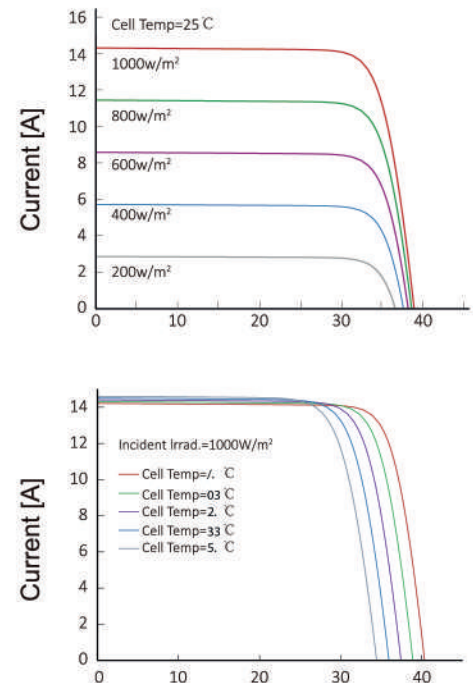



# HW-7N54HC-MF-BK

## 425W~445W

### MONOCRYSTALLINE MODULE



#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 445W with module efficiency up to 22.79% by using the most advanced , N-Type TOPCon cell technology.
- Aesthetically appealing design with black back sheet and frame.
- Lower annual power degradation and high energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730 (2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

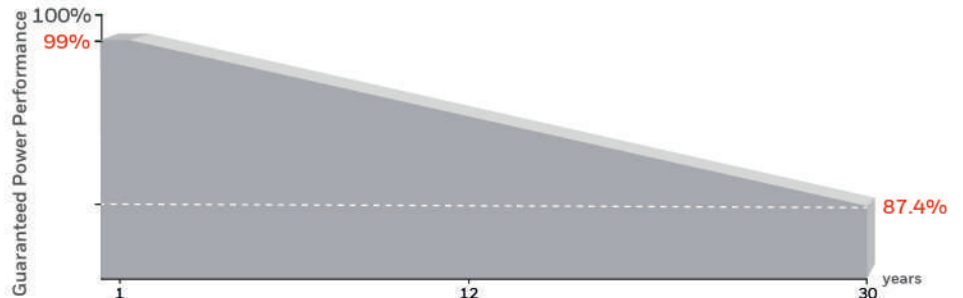

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power ( $P_{max}$ )	425W	430W	435W	440W	445W
Open Circuit Voltage ( $V_{oc}$ )	38.20V	38.40V	38.60V	38.75V	38.90V
Short Circuit Current ( $I_{sc}$ )	13.98 A	14.09 A	14.18 A	14.26 A	14.33A
Maximum Power Voltage ( $V_{mp}$ )	32.10V	32.27V	32.42V	32.60V	32.80V
Maximum Power Current ( $I_{mp}$ )	13.24 A	13.33 A	13.42 A	13.50 A	13.57 A
Module Efficiency (%)	21.76 %	22.02 %	22.28 %	22.53 %	22.79 %
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Safety Class	Class C				
Maximum Series Fuse	25 A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of  $P_{max}$ : ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power ( $P_{max}$ )	319.6 W	323.4 W	327 W	330 W	333 W
Open Circuit Voltage ( $V_{oc}$ )	36.29V	36.48 V	36.60 V	36.70 V	36.80V
Short Circuit Current ( $I_{sc}$ )	11.28 A	11.37 A	11.44 A	11.50 A	11.56A
Voltage at Maximum Power ( $V_{mp}$ )	30.21 V	30.37 V	30.50 V	30.61 V	30.72 V
Current at Maximum Power ( $I_{mp}$ )	10.58 A	10.65 A	10.72 A	10.78 A	10.84 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type (182x91mm)
Number of cells	108 (6x9x2)
Module dimensions	1722x1134x30mm
Weight	20.5kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	Black
Frame	Aluminum hollow-chamber frame, nodized aluminum alloy black
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of $P_{max}$	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C


## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	216 pcs
Module quantity per 40' container	936 pcs (HQ)

## ENGINEERING DRAWINGS

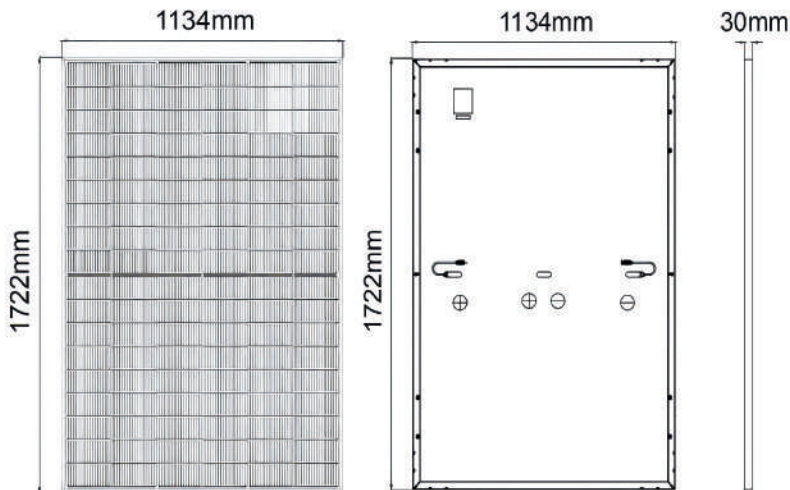

## CURRENT-VOLTAGE CURVES

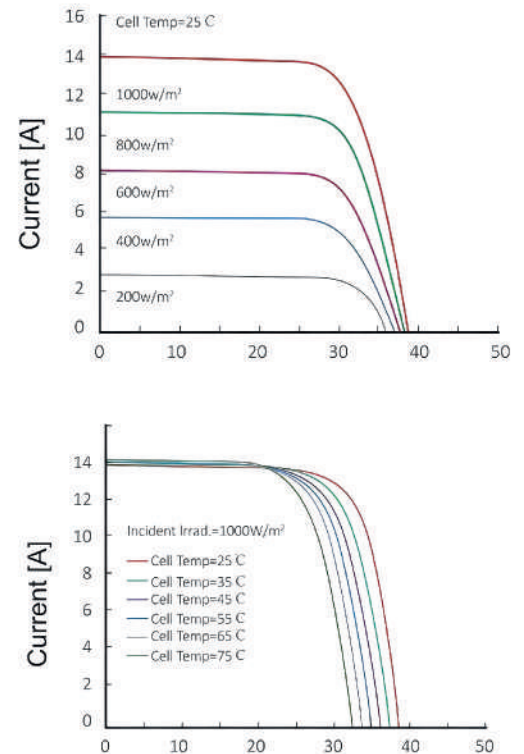

## HW-7N54HC-MF

### 425W~445W

#### MONOCRYSTALLINE MODULE



#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 445W with module efficiency up to 22.79% by using the most advanced, N-Type TOPCon cell technology.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730 (2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

Passionately  
committed to  
delivering innovative  
energy solutions

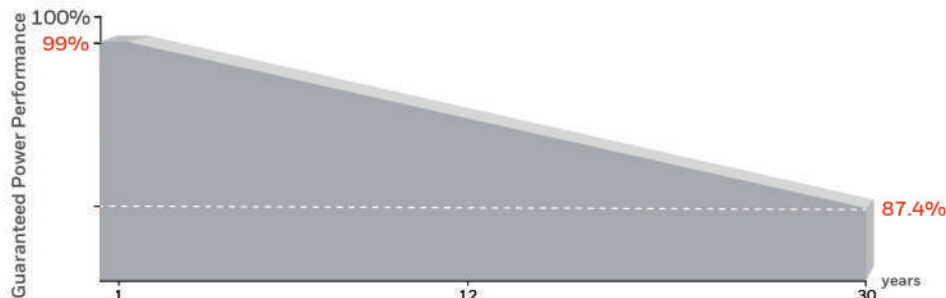

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power ( $P_{max}$ )	425W	430W	435W	440W	445W
Open Circuit Voltage ( $V_{oc}$ )	38.20V	38.40V	38.60V	38.75V	38.90V
Short Circuit Current ( $I_{sc}$ )	13.98 A	14.09 A	14.18 A	14.26 A	14.33A
Maximum Power Voltage ( $V_{mp}$ )	32.10V	32.27V	32.42V	32.60V	32.80V
Maximum Power Current( $I_{mp}$ )	13.24 A	13.33 A	13.42 A	13.50 A	13.57 A
Module Efficiency (%)	21.76 %	22.02 %	22.28 %	22.53 %	22.79 %
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Safety Class	Class C				
Maximum Series Fuse	25 A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power ( $P_{max}$ )	319.6 W	323.4 W	327 W	330 W	333 W
Open Circuit Voltage ( $V_{oc}$ )	36.29V	36.48 V	36.60 V	36.70 V	36.80V
Short Circuit Current ( $I_{sc}$ )	11.28 A	11.37 A	11.44 A	11.50 A	11.56A
Voltage at Maximum Power ( $V_{mp}$ )	30.21 V	30.37 V	30.50 V	30.61 V	30.72 V
Current at Maximum Power ( $I_{mp}$ )	10.58 A	10.65 A	10.72 A	10.78 A	10.84 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type (182x91mm)
Number of cells	108 (6x9x2)
Module dimensions	1722x1134x30mm
Weight	20.5kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	White
Frame	Aluminum hollow-chamber frame, nodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C


## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	216 pcs
Module quantity per 40' container	936 pcs (HQ)

## ENGINEERING DRAWINGS

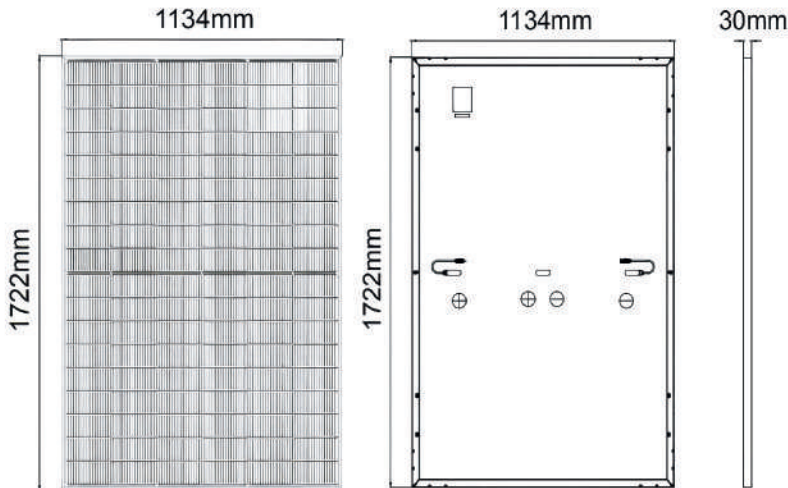

## CURRENT-VOLTAGE CURVES

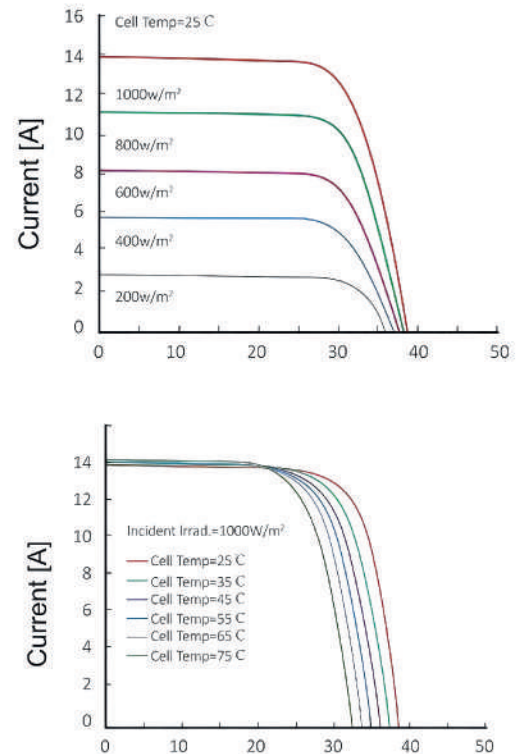




# HW-6N72HC-BT

## 560W~585W

### MONOCRYSTALLINE MODULE

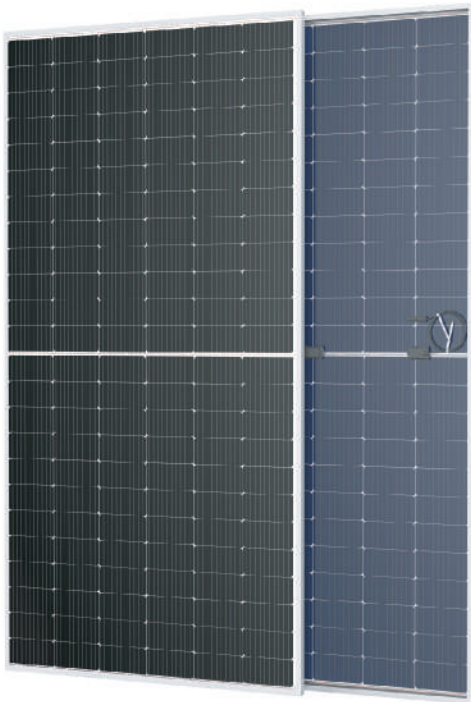

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 585W with module efficiency up to 22.65% by using the most advanced , N-Type TOPCon cell technology.
- Light-weight desing using transparent backsheet for easy installation and low BOS cost.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730 (2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

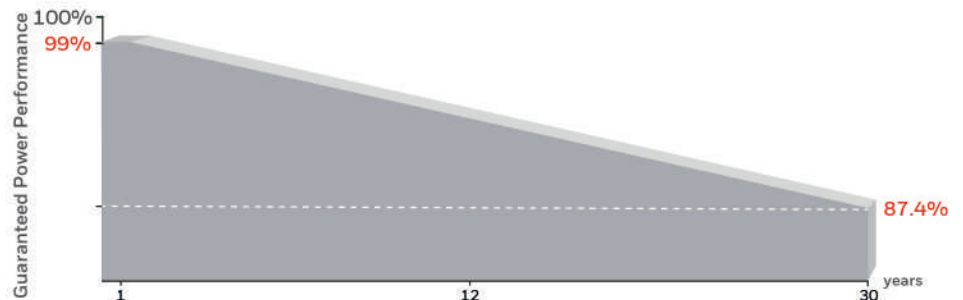

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P <sub>max</sub> )	560W	565W	570W	575W	580W	585W
Open Circuit Voltage (V <sub>oc</sub> )	50.30V	50.45V	50.60V	50.75V	50.90V	51.10V
Short Circuit Current (I <sub>sc</sub> )	13.97A	14.04A	14.11A	14.18A	14.25A	14.31A
Maximum Power Voltage (V <sub>mp</sub> )	41.92V	42.07V	42.22V	42.37V	42.52V	42.70V
Maximum Power Current (I <sub>mp</sub> )	13.36A	13.43A	13.50A	13.57A	13.64A	13.70A
Module Efficiency (%)	21.67%	21.87%	22.06%	22.25%	22.45%	22.65%
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1500V DC					
Fire Safety Class	Class C					
Maximum Series Fuse	30A					

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of P<sub>max</sub>: ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P <sub>max</sub> )	421W	425W	429W	433W	437W	441W
Open Circuit Voltage (V <sub>oc</sub> )	47.78V	47.91V	48.08V	48.17V	48.28V	48.40V
Short Circuit Current (I <sub>sc</sub> )	11.28A	11.35A	11.42A	11.48A	11.55A	11.61A
Voltage at Maximum Power (V <sub>mp</sub> )	39.45V	39.58V	39.71V	39.84V	39.95V	40.18V
Current at Maximum Power (I <sub>mp</sub> )	10.67A	10.74A	10.81A	10.87A	10.94A	11.00A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type, bifacial (182x91mm)
Number of cells	144 (8x12x2)
Module dimensions	2278x1134x30mm
Weight	26.6kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	Transparent
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P <sub>max</sub>	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C



## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)

## ENGINEERING DRAWINGS

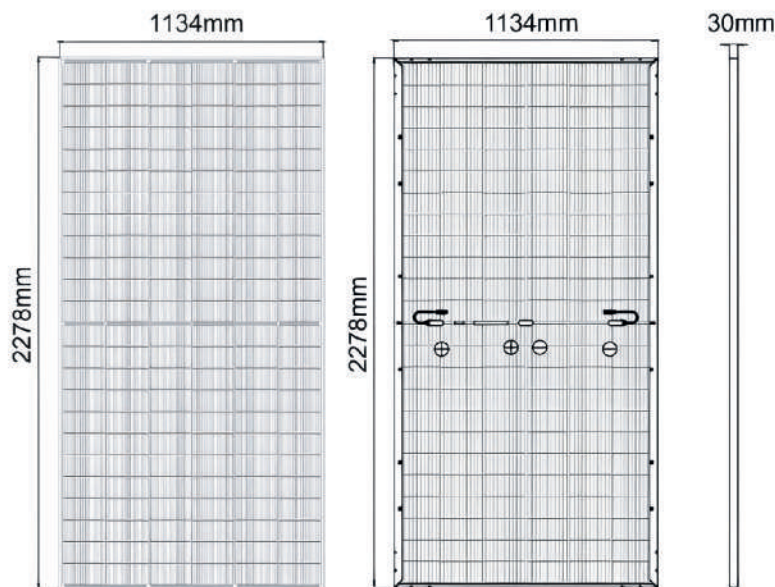

## CURRENT-VOLTAGE CURVES

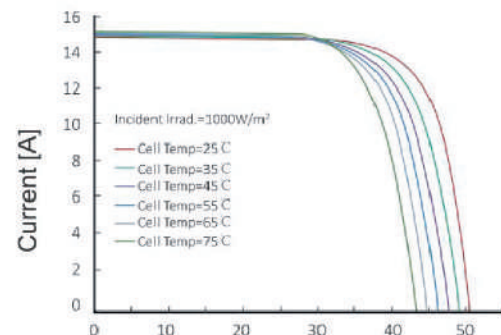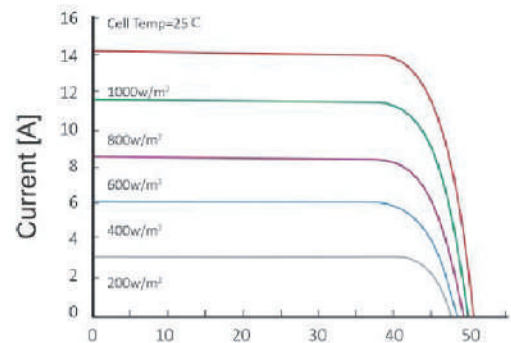






# HW-7N66HC-BT

## 600W~620W

### MONOCRYSTALLINE MODULE

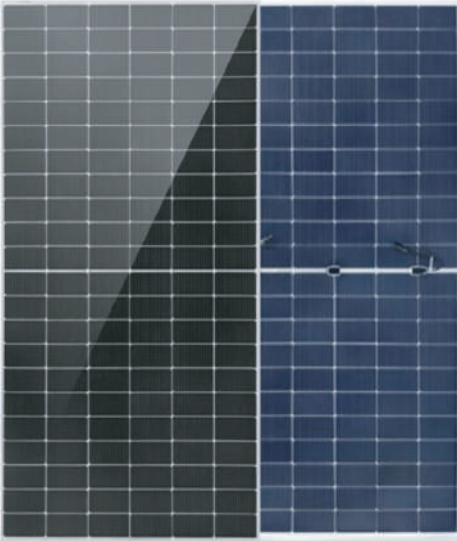

#### ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 620W with module efficiency up to 23.00% by using the most advanced , N-Type TOPCon cell technology.
- Light-weight desing using transparent backsheet for easy installation and low BOS cost.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.

#### CERTIFICATIONS


- IEC 61215 (2021), IEC 61730(2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



#### SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

**Passionately**  
**committed to**  
**delivering innovative**  
**energy solutions**

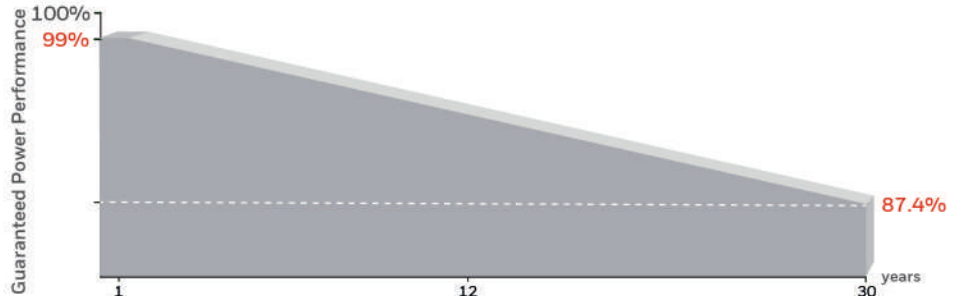

## ELECTRICAL CHARACTERISTICS AT STC

Maximum Power ( $P_{max}$ )	600W	605W	610W	615W	620W
Open Circuit Voltage ( $V_{oc}$ )	47.70 V	47.90 V	48.10 V	48.30V	48.50 V
Short Circuit Current ( $I_{sc}$ )	15.95 A	16.00 A	16.05 A	16.10 A	16.15 A
Maximum Power Voltage ( $V_{mp}$ )	39.44 V	39.60 V	39.77 V	39.96 V	40.15 V
Maximum Power Current ( $I_{mp}$ )	15.21 A	15.28 A	15.34 A	15.39 A	15.45 A
Module Efficiency (%)	22.20 %	22.40 %	22.60 %	22.80 %	23.00 %
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Safety Class	Class C				
Maximum Series Fuse	30 A				

STC: Irradiance 1000W/m<sup>2</sup>, Cell temperature 25°C, AM1.5; Tolerance of  $P_{max}$ : ±3%; Measurement Tolerance: ±3%

## ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power ( $P_{max}$ )	453.60 W	457.38 W	461.16 W	464.94 W	468.72 W
Open Circuit Voltage ( $V_{oc}$ )	44.84 V	45.03 V	45.21 V	45.40 V	45.58 V
Short Circuit Current ( $I_{sc}$ )	12.68 A	12.72 A	12.76 A	12.80 A	12.84 A
Voltage at Maximum Power ( $V_{mp}$ )	37.27 V	37.42 V	37.58 V	37.76 V	37.94 V
Current at Maximum Power ( $I_{mp}$ )	12.17 A	12.22 A	12.27 A	12.31 A	12.36 A

NOCT: Irradiance 800W/m<sup>2</sup>, Ambient temperature 20°C, Wind Speed 1 m/s

## MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type, Bifacial (182x210mm)
Number of cells	132 (6x11x2)
Module dimensions	2382x1134x30mm
Weight	28.5kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	Transparent
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm <sup>2</sup> , 300mm in length, length can be customized
Connector	MC4 compatible


## TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of $P_{max}$	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C



## PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)

## ENGINEERING DRAWINGS

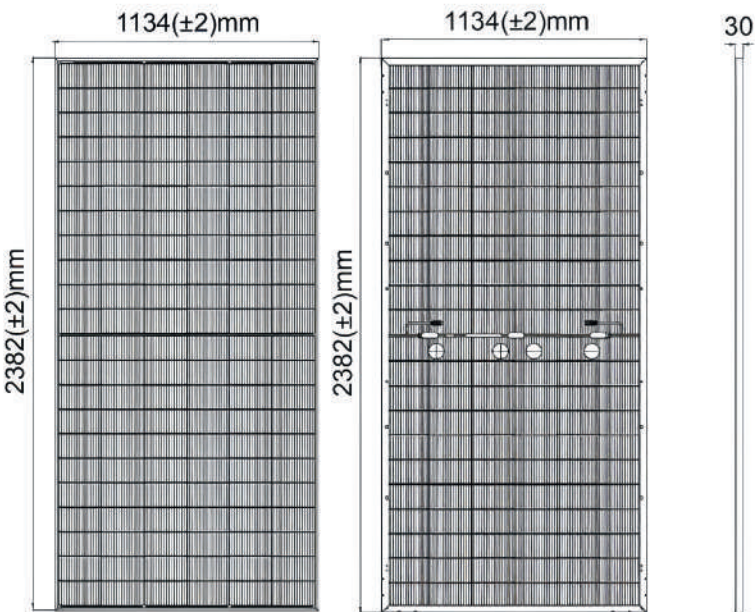

## CURRENT-VOLTAGE CURVES

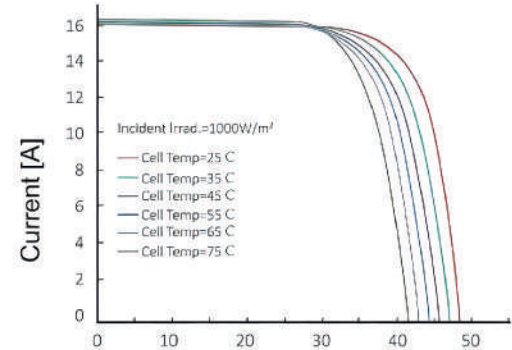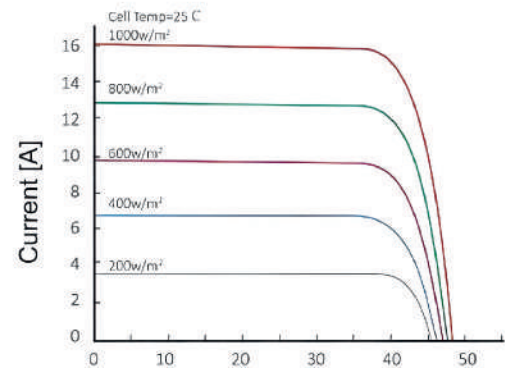




# Honeywell

## EXHIBITORS 2025

This Honeywell display unit completely enhance and stylize your storefront while offerinf a wide range of products.

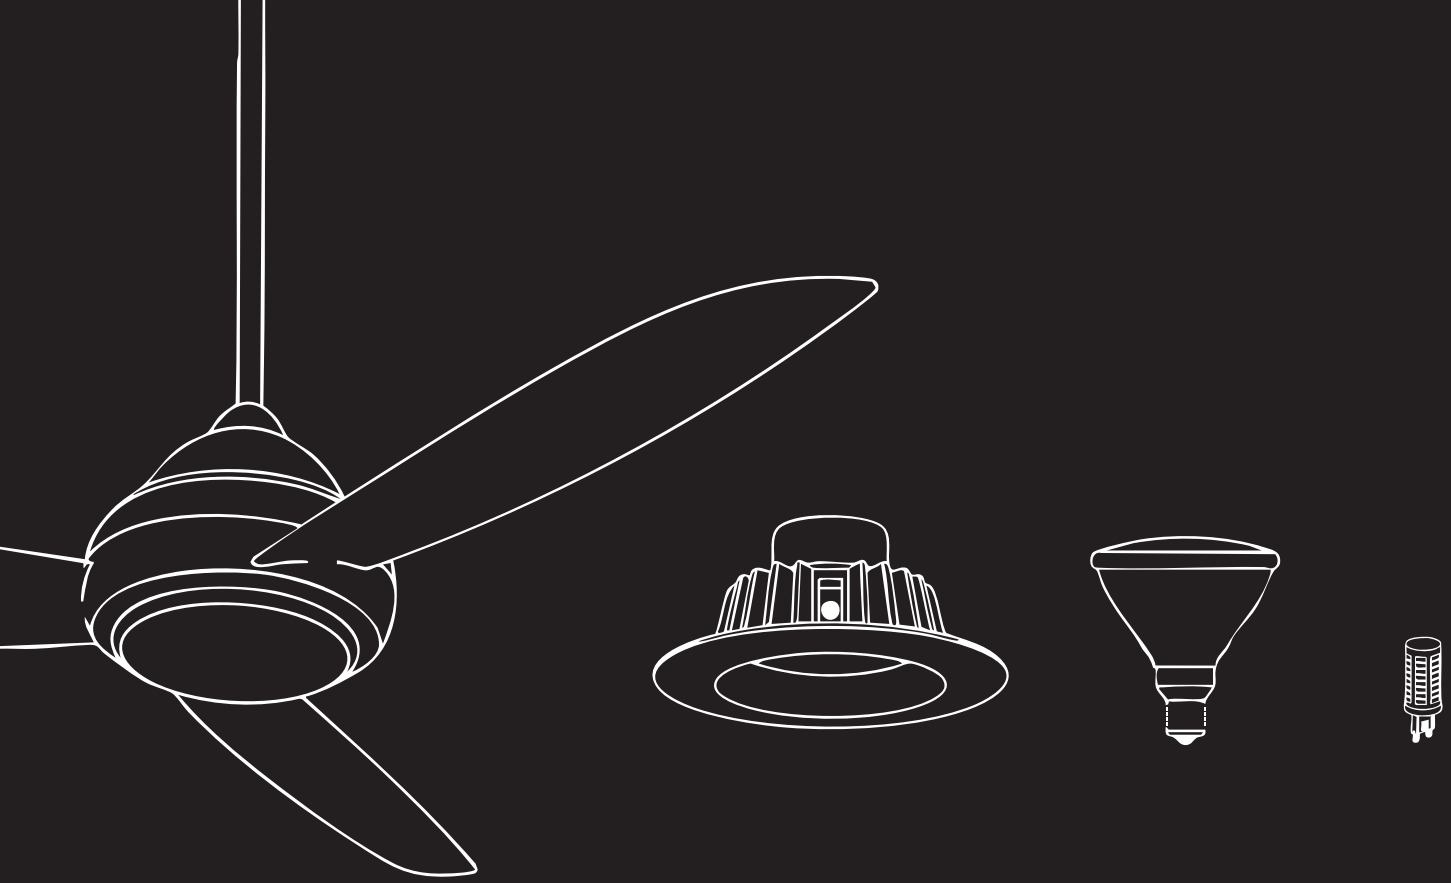

 **ilumitec**<sup>®</sup>  
INTERNATIONAL

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell makes no representations or warranties with respect to this product.

Manufactured by Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432 / Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com) / [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)