



LED LIGHTBULB MR16 / 2-PIN

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 5W
- 5W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

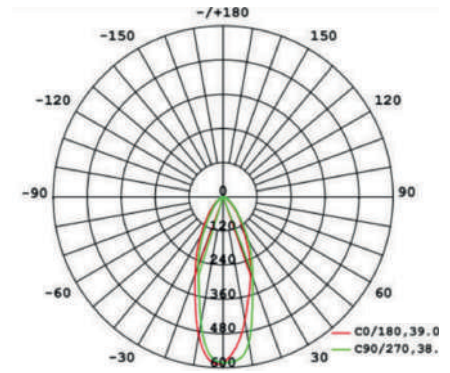

Shape:	MR16
Cap/Fitting:	GU5.3
Voltage:	100-240V / 100-130V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.

Height:	48 mm
Width:	50 mm

ADDITIONAL INFORMATION

Equivalent: 50W Halogen MR16

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-3K
5W	4000K	420 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-4K
5W	6500K	420 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-6K
5W	3000K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM3K
5W	4000K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM4K
5W	6500K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM6K

For more information, please visit www.HoneywellLights-fans.com