



LED LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 5W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

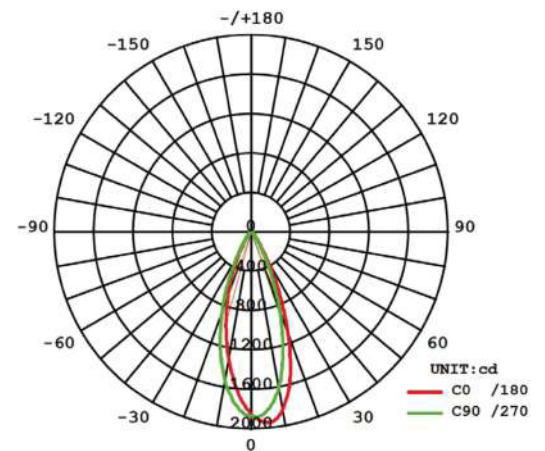

SPECIFICATIONS

Shape:	PAR20
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS

Height:	87mm
Width:	63mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000k	500Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-3K
5W	6500k	500Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC019 | 01-2025