



LED PAR 30 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 30W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

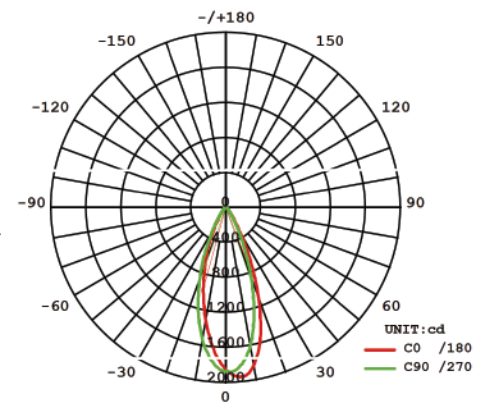

SPECIFICATIONS

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	24°
Certification:	CE

DIMENSIONS

Height:	128mm
Width:	95mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
30W	3000K	3000 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-02-30W-3K
30W	4000K	3100 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-02-30W-4K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILLUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.