



**LED LIGHT BULB**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**AVAILABLE WATTAGE OPTIONS:**

- 9W


**BENEFITS:**

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

**APPLICATION:**

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

**SHORT NECK**

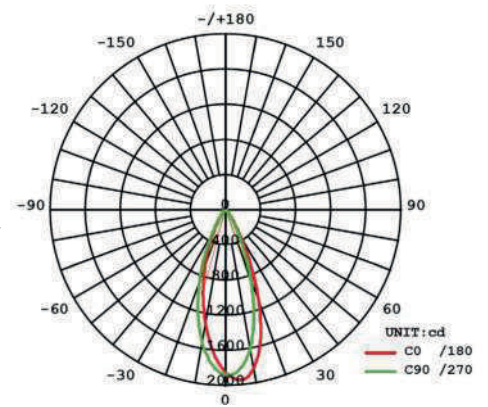

**SPECIFICATIONS**

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	40°

**DIMENSIONS**

Height:	87mm
Diameter:	92mm

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
9W	3000K	900 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-3K
9W	4000K	950 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-4K
9W	6500K	950Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

**Iluminaciones Técnicas S.A.**

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2015 ILUMINACIONES TECNICAS SA. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas SA.

SPEC020 | 01-2025