

Honeywell

AUTHORIZED LICENSEE

- LED LIGHT BULBS**
- LED DOWNLIGHTS**
- COMMERCIAL LIGHTS**
- CEILING FANS**
- EXTENSION CORDS**
- SURGE PROTECTORS**
- SOLAR LIGHTING**
- SOLAR PANELS**

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.



Honeywell

LED PANELS 2026

Iluminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.




LED RECESSED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch
Only to 18W CCT and 24W cct models




AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

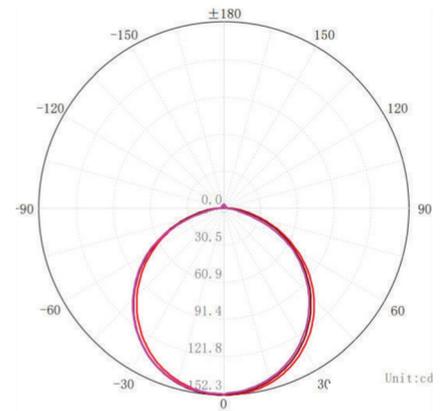

SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K	390 Lm	120mm x120mm x 18mm	Non Dimmable	HW-P02-S6W-3K
6W	6000K	390Lm	120mm x120mm x 18mm	Non Dimmable	HW-P02-S6W-6K
6W	3000K/4000K/6500K	323Lm/398Lm/332Lm	119mm x119mm x 18mm	Non Dimmable	HW-P06-S6W-CCT
12W	3000K/4000K/6500K	733Lm/824Lm/744Lm	169mm x169mm x 18mm	Non Dimmable	HW-P06-S12W-CCT
18W	3000K	1540Lm	220mm x220mm x 18mm	Non Dimmable	HW-P02-S18W-CCT
18W	6500K	1540Lm	220mm x220mm x 18mm	Non Dimmable	HW-P02-S18W-CCT
18W	3000K/4000K/6500K	1430Lm/1580Lm/1430Lm	220mm x220mm x 18mm	Non Dimmable	HW-P06-S18W-CCT
24W	3000K/4000K/6500K	1730Lm/1900Lm/1730Lm	290mm x290mm x 18mm	Non Dimmable	HW-P06-S24W-CCT

For more information, please visit www.HoneywellLights-fans.com.



RECESSED LED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 3 W
- 6 W
- 12W
- 18W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

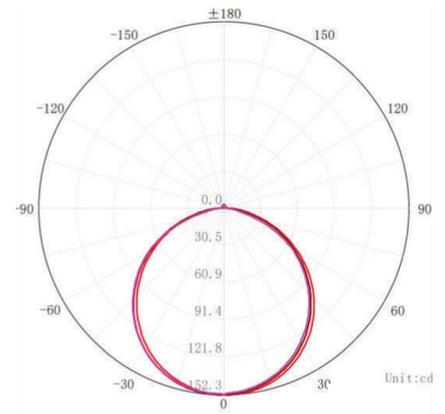

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
3W	3000K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-3K
3W	6500K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-6K
6W	3000K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-3K
6W	6500K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-6K
12W	3000K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-3K
12W	6500K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-6K
18W	3000K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-3K
18W	6500K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-6K

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC102 | 01-2025




RECESSED LED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 9W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

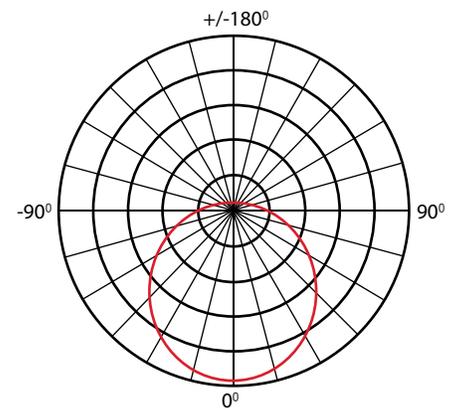

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	362Lm/445Lm/353Lm	D-115mm H-18mm	Non Dimmable	HW-P05-R6W-CCT
9W	3000K/4000K/6500K	627Lm/667Lm/627Lm	D-167mm H-18mm	Non Dimmable	HW-P05-R9W-CCT
12W	3000K/4000K/6500K	815Lm/916Lm/827Lm	D-167mm H-18mm	Non Dimmable	HW-P05-R12W-CCT
18W	3000K/4000K/6500K	1430Lm/1580Lm/1430Lm	D-220mm H-18mm	Non Dimmable	HW-P05-R18W-CCT
24W	3000K/4000K/6500K	1730Lm/1900Lm/1730Lm	D-292mm H-18mm	Non Dimmable	HW-P05-R24W-CCT

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.
 Panama Headquarters 1.(888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC102 | 01-2025



LED SURFACE PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 12W
- 18W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

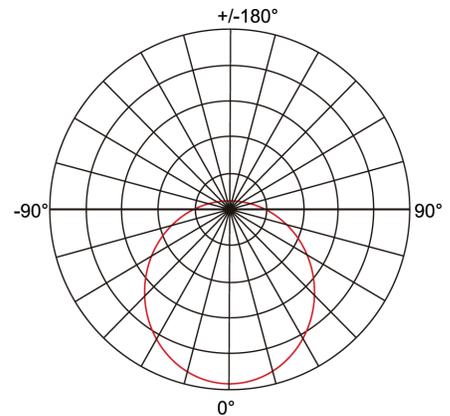

SPECIFICATIONS

Shape:	Round LED Lamp
Cap/Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
12W	6500K	750Lm	D-160mm H-27mm	Non Dimmable	HW-P03-R12W-6K
18W	6500K	1200Lm	D-210mm H-27mm	Non Dimmable	HW-P03-R18W-6K

For more information, please visit www.HoneywellLights-fans.com.



LED SURFACE PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

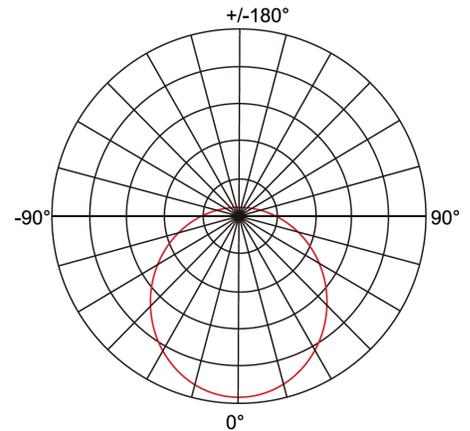

SPECIFICATIONS	
Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION		
Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
6W	3000K/4000K/6500K	330 Lm / 440 Lm / 330 Lm	D-112mm H-28mm	Non Dimmable	HW-P07-R6W-CCT	
12W	3000K/4000K/6500K	770 Lm / 880 Lm / 770 Lm	D-160mm H-28mm	Non Dimmable	HW-P07-R12W-CCT	
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	D-210mm H-28mm	Non Dimmable	HW-P07-R18W-CCT (White or Black)	
24W	3000K/4000K/6500K	1730 Lm / 1900 Lm / 1730 Lm	D-282mm H-28mm	Non Dimmable	HW-P07-R24W-CCT	

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC108 | 01-2025



SURFACE MOUNTED LED PANEL

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 18W
- 24W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

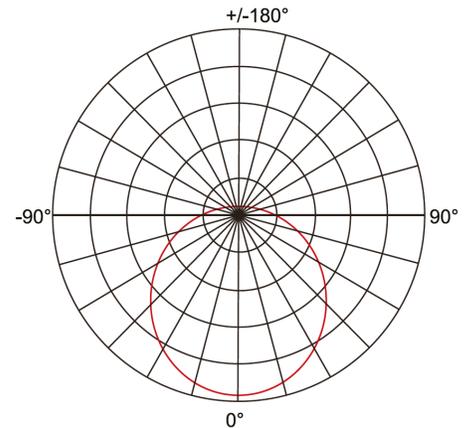

SPECIFICATIONS	
Shape:	Square LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION		
Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
18W	6500K	1540Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-6K	
18W	3000K	1540Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-3K	
24W	3000K	1400Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-3K	
24W	6500K	1400Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-6K	

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC107 | 01-2025




SURFACE MOUNTED LED PANEL

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

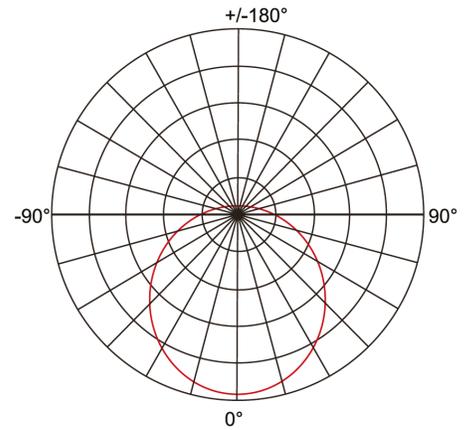

SPECIFICATIONS	
Shape:	Square LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION		
Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model	
6W	3000K/4000K/6500K	330 Lm / 440 Lm / 330 Lm	112mm x 112mm x 28mm	Non Dimmable	HW-P08-S6W-CCT	
12W	3000K/4000K/6500K	815Lm/916Lm/827Lm	160mm x 160mm x 28mm	Non Dimmable	HW-P08-S12W-CCT	
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	210mm x 210mm x 28mm	Non Dimmable	HW-P08-S18W-CCT (White or Black)	
24W	3000K/4000K/6500K	1730 Lm / 1900 Lm / 1730 Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P08-S24W-CCT	

For more information, please visit www.HoneywellLights-fans.com.



LED SURFACE PANEL LIGHT WITH MOTION SENSOR

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




AVAILABLE WATTAGE OPTIONS:

- 18W CCT Switchable

BENEFITS:

- Motion Sensor.
- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.

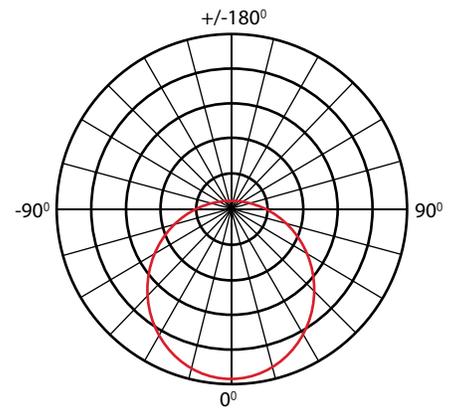

SPECIFICATIONS

Shape: Round LED Lamp with Motion Sensor
 Fitting: Surface Mounted Ceiling

ADDITIONAL INFORMATION

Volt: 100-277V 50-60Hz
 Beam Angle: 110°
 Certification: CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
18W	3000K/4000K/6500K	1440Lm/1440Lm/1415Lm	D-210mm H-37mm	Non Dimmable	HW-P09-SM-R18W-CCT

For more information, please visit www.HoneywellLights-fans.com.



DIMMABLE LED PANEL

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 12W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

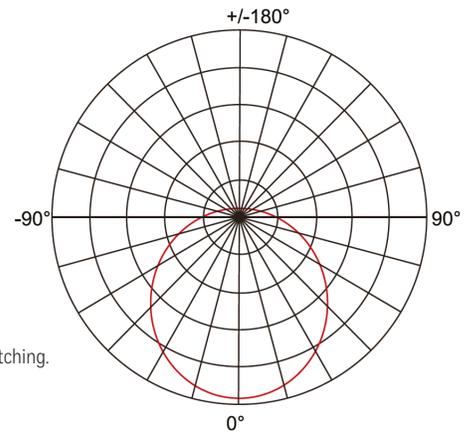

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	110-130V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Luminary Flux	Size	Dimmable / Non Dimmable	Model
6W	2700K/3000K/3500K/4000K/5000K	450 Lm	D-120mm H-20mm	Dimmable	HW-P10-R6W-5CCT
12W	2700K/3000K/3500K/4000K/5000K	945 Lm	D-170mm H-20mm	Dimmable	HW-P10-R12W-5CCT

For more information, please visit www.HoneywellLights-fans.com.




SLIM SURFACE LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

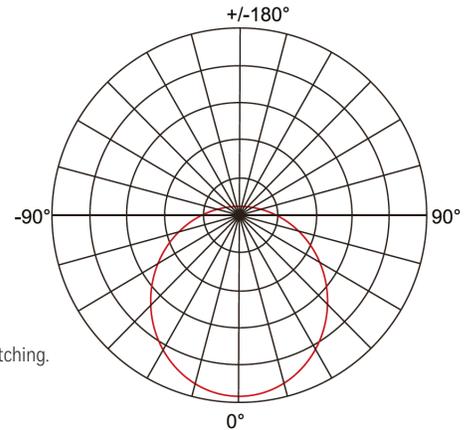

(CCT) Color Temperature Switch



SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Luminary Flux	Size	Dimmable / Non Dimmable	Model
13W	3000K/4000K/6500K	1050 Lm	D-180mm H-26mm	Non Dimmable	HW-P11-R13W-CCT

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC108 | 01-2025



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 5W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

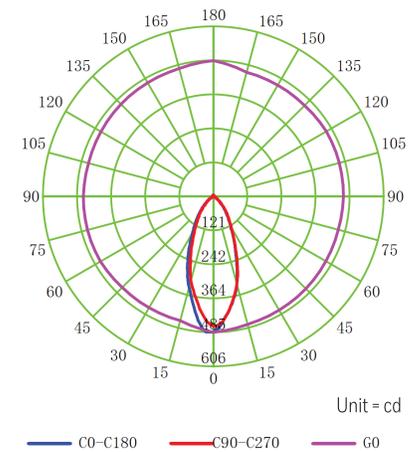

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Tiltable Angle
Finish:	White and Black Available

ADDITIONAL INFORMATION

Height:	45mm
Width:	90mm
Beam Angle:	38° Degree

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-WH-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-WH-6K
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-BK-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D01-5W-BK-6K

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC100 | 01-2025



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 5W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

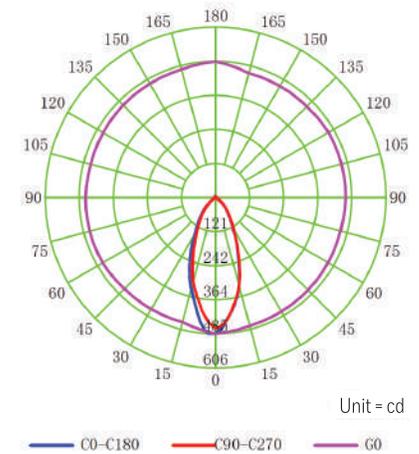

SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

ADDITIONAL INFORMATION

Height:	45mm
Length / Width:	90mm x 90mm
Beam Angle:	38° Degree

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-6K
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-6K

For more information, please visit www.HoneywellLights-fans.com.



Honeywell

LED LIGHT BULB 2026

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.



LED LIGHTBULB A19

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 6W
- 9W
- 15W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

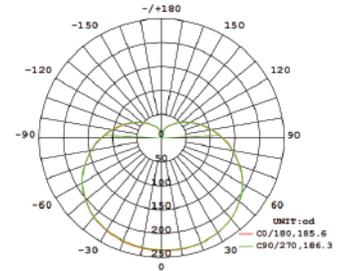

SPECIFICATIONS		DIMENSION		SHAPE
Cap/Fitting:	E27	6W Size:	D-55mm H-98mm	A55
Voltage:	100-240V	9W Size:	D-60mm H-108mm	A60
Beam Angle:	180° Degree	15W Size:	D-70mm H-126mm	A70

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	Packing
6W	3000K	540 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-01-4PK-6W-3K	4 Pack
6W	6500K	620 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-05-4PK-6W-65K	4 Pack
9W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-1PK-9W-65K	1 Pack
9W	3000K	840 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-2PK-9W-30K	2 Pack
9W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-2PK-9W-65K	2 Pack
9W	3000K	840 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-4PK-9W-30K	4 Pack
9W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-4PK-9W-65K	4 Pack
9W	3000K	840 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-6PK-9W-30K	6 Pack
9W	6500K	1400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-06-6PK-9W-65K	6 Pack
15W	3000K	1460 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-3K	2 Pack
15W	6500K	860 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-03-2PK-15W-6K	2 Pack
15W	3000K	1400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-1PK-15W-30K	1 Pack
15W	6500K	1460 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-1PK-15W-65K	1 Pack
15W	3000K	1400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-2PK-15W-30K	2 Pack
15W	6500K	1460 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BA19-07-2PK-15W-65K	2 Pack

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A

SPEC012 | 01-2025



LED LIGHTBULB A19 CCT SWITCH

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 9W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

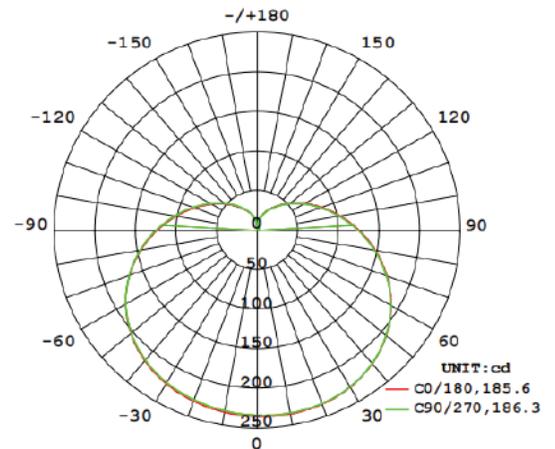

SPECIFICATIONS

Cap/Fitting:	E27
Voltage:	100-240V
Beam Angle:	180° Degree
Certification:	CE

DIMENSION

Size:	D-60mm H-110mm
Shape:	A19
Tone:	3000K/ 4000K/ 6500K

AVAILABLE WATTAGE OPTIONS

Power	Brightness	Volt	CCT	Dimmable / Non Dimmable	Model
9W	930 Lm	100-240V - 50-60Hz	3 Tone CCT Switch	Non Dimmable	HW-BA19-08-2PK-9W-CCT

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC026 | 01-2025



T8 LED LAMP

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 9W
- 18W
- 36W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

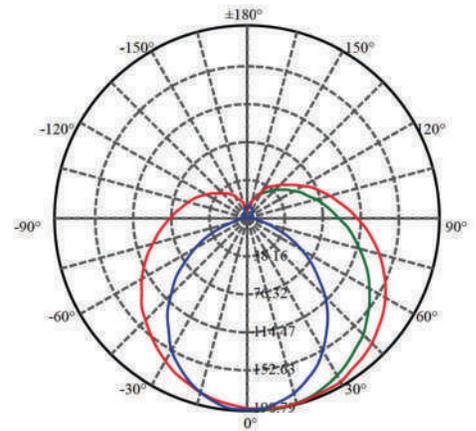

SPECIFICATIONS

Shape:	LED TUBE
Cap/Fitting:	T8

ADDITIONAL INFORMATION

Volt:	100-277V - 50-60Hz
Material:	Glass
Lifespan:	50,000 Hrs

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Base	Size	Dimmable / Non Dimmable	Model
9W	3000K	939 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-3K
9W	4000K	934 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-4K
9W	6500K	900 Lm	G13	W-25.5mm H-604mm - 0.6m	Non Dimmable	HW-BT8-01-9W-6K
18W	3000K	1925 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-3K
18W	4000K	1925 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-4K
18W	6500K	1930 Lm	G13	W-25.5mm H-1213mm - 1.2m	Non Dimmable	HW-BT8-02-18W-6K
36W	6500K	3758 Lm	FA8	W-25.5mm H-2380mm - 2.4m	Non Dimmable	HW-BT8-03-36W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC018 | 01-2025



LED MINI-BULB G4

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 1.8W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

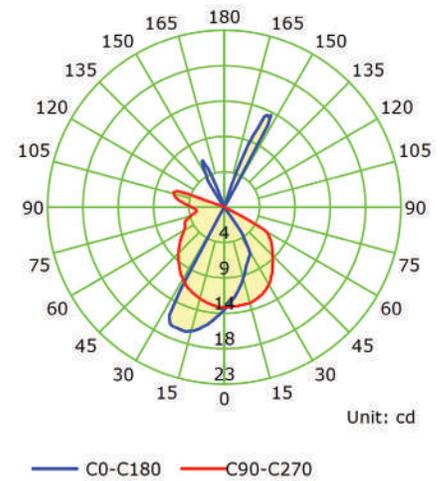

SPECIFICATIONS

Shape:	LED LIGHT BULB
Cap/Fitting:	G4
Beam Angle:	220° Degree

DIMENSIONS

Height:	10mm
Width:	38mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2W	3000K	220 Lm	12V - 50-60Hz	Non Dimmable	HW-BG4-01-3PK-1.8W-3K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC017 | 04-2025



LED MINI-BULB G9

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 2.5W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

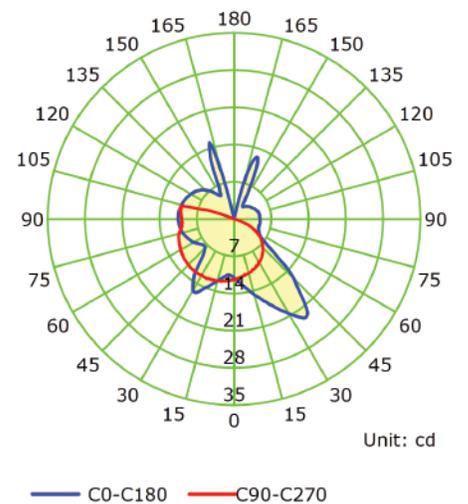

SPECIFICATIONS

Shape:	LED LIGHT BULB
Cap/Fitting:	G9
Beam Angle:	220° Degree

DIMENSIONS

Height:	48.5mm
Width:	16mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2.5W	3000K	220 lm	100-130V - 50-60Hz	Non Dimmable	HW-BG9-01-3PK-2.5W-3K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC015 | 01-2025



LED MINI-BULB G9

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 4W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

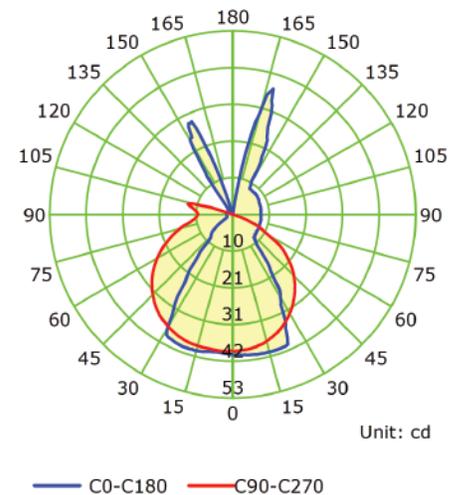

SPECIFICATIONS

Shape:	LED LIGHT BULB
Cap/Fitting:	G9
Beam Angle:	220° Degree

DIMENSIONS

Height:	54mm
Width:	18mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
4W	3000K	495 lm	100-130V - 50-60Hz	Dimmable	HW-BG9-02-3PK-4W-DIM3K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC016 | 01-2025



LED LIGHTBULB GU10 / 2-PIN TWIST AND LOCK

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 5W
- 7W
- 5W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- For use in mains voltage GU10 downlights, spotlights and luminaires.

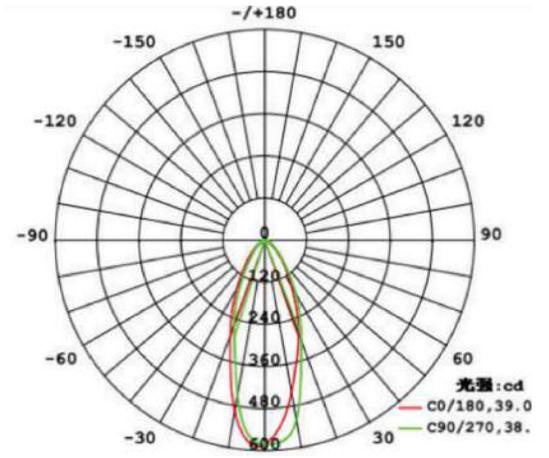

CE
 BGU10-01,02,03,04,05
 cUL LISTED
 RoHS FC
 BGU10-06

SPECIFICATIONS	
Shape:	GU10
Cap/Fitting:	GU10
Certification:	CE
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.

DIMENSION			
Height:	54 mm	Height Bulb Pro:	55 mm
Diameter:	50 mm	Diameter Bulb Pro:	50 mm

ADDITIONAL INFORMATION	
Equivalent:	50W Halogen GU10
Certifications:	BGU10-01,02,03,04,05: CE BGU10-06: UL, FC, RoHS

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
5W	3000K	410 Lm	100-240V- 50-60Hz	Non Dimmable	HW BGU10 01 2PK 5W 3K	
5W	4000K	470 Lm	100-240V- 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-4K	
5W	6500K	470 Lm	100-240V- 50-60Hz	Non Dimmable	HW-BGU10-01-2PK-5W-6K	
5W	3000K	460 Lm	100-130V- 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM3K	
5W	4000K	450 Lm	100-130V- 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM4K	
5W	6500K	460 Lm	100-130V- 50-60Hz	Dimmable	HW-BGU10-03-2PK-5W-DIM6K	
6.5W	4000K	700 Lm	100-120V-50-60Hz	Dimmable	HW-BGU10-06-UL-2PK-6.5W-DIM4K	
7W	3000K	640 Lm	100-240V- 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-3K	
7W	4000K	650 Lm	100-240V- 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-4K	
7W	6500K	650 Lm	100-240V- 50-60Hz	Non Dimmable	HW-BGU10-02-2PK-7W-6K	
7W	3000K	900 Lm	100-277V-50-60Hz	Non Dimmable	HW-BGU10-04PRO-2PK-7W-3K	
7W	3000K	800 Lm	100-130V-50-60Hz	Dimmable	HW-BGU10-05PRO-2PK-7W-3K-DIM3K	

For more information please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2024 ILLUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC001 | 01-2024



LED LIGHTBULB MR16 / 2-PIN

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 5W
- 5W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

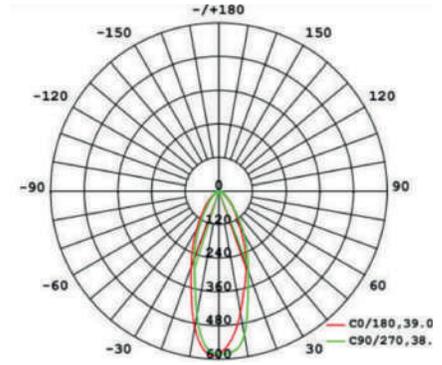

SPECIFICATIONS	
Shape:	MR16
Cap/Fitting:	GU5.3
Voltage:	100-240V / 100-130V
Beam Angle:	38° Degree
Material:	Heat dissipating thermoplastic body.

DIMENSION	
Height:	48 mm
Width:	50 mm

ADDITIONAL INFORMATION	
Equivalent:	50W Halogen MR16

AVAILABLE WATTAGE OPTIONS						
Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model	
5W	3000K	400 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-3K	
5W	4000K	420 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-4K	
5W	6500K	420 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BMR16-01-2PK-5W-6K	
5W	3000K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM3K	
5W	4000K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM4K	
5W	6500K	440 Lm	100-130V - 50-60Hz	Dimmable	HW-BMR16-02-2PK-5W-DIM6K	

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS SA. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC014 | 01-2025



LED Highbay Lightbulb

Luminous Intensity Distribution Curve



AVAILABLE WATTAGE OPTIONS:


- 50W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Widely used for indoor and commercial lighting.
- Wall mount fixtures.
- HID retrofit replacement lamps.
- Garages, warehouses and work-sites.

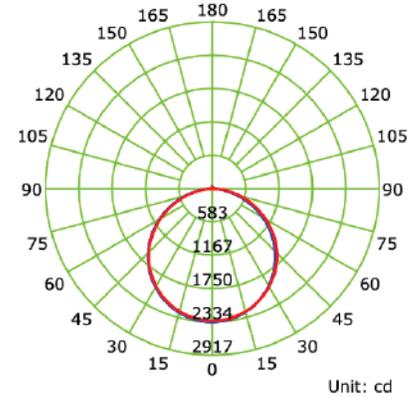

— C0-C180 — C90-C270

SPECIFICATIONS

Shape:	LED BULB T140
Cap/Fitting:	E27
Bulb Finish:	White

ADDITIONAL INFORMATION

Height:	220 mm
Width:	140 mm
Beam Angle:	180°

AVAILABLE WATTAGE OPTIONS


Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
50W	6500K	4700lm	100-240V - 50-60Hz	Non Dimmable	HW-BLED-01-50W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC010 | 01-2025

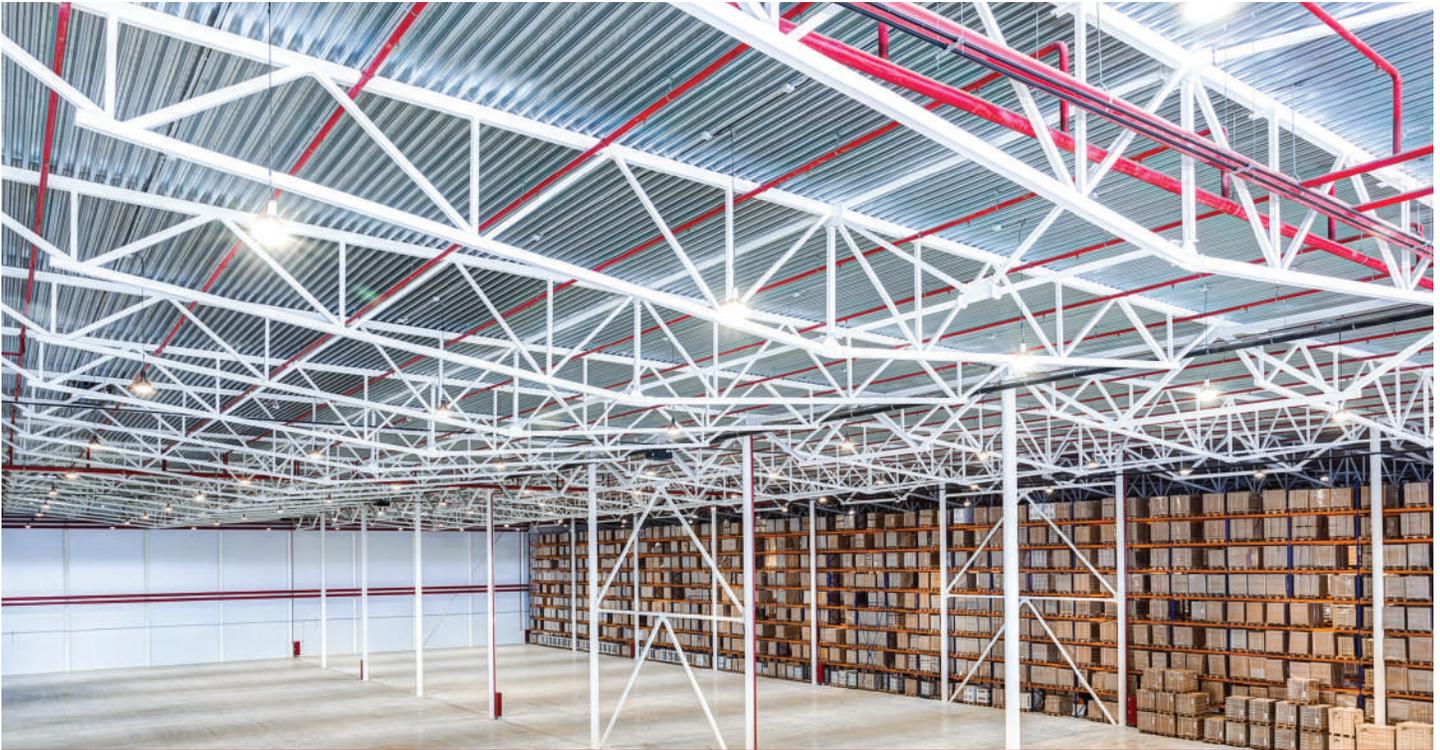

LED HIGH POWER LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 100W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Widely used for indoor and commercial lighting.
- Wall mount fixtures.
- HID retrofit replacement lamps.
- Garages, warehouses and work-sites.

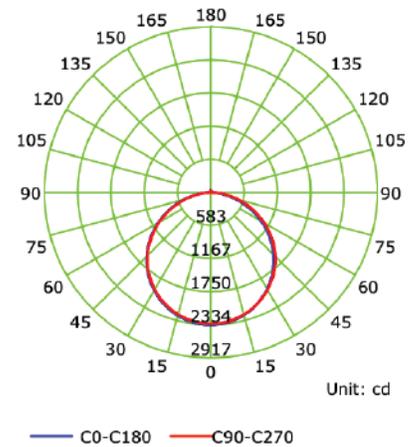

SPECIFICATIONS

Shape:	LED BULB T150
Cap/Fitting:	E27
Bulb Finish:	Alluminium Housing

ADDITIONAL INFORMATION

Height:	270mm
Width:	150mm
Beam Angle:	180°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
100W	6500K	9000 lm	100-277V - 50-60Hz	Non Dimmable	HW-BLED-02-100W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC011 | 01-2025



LED LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 5W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

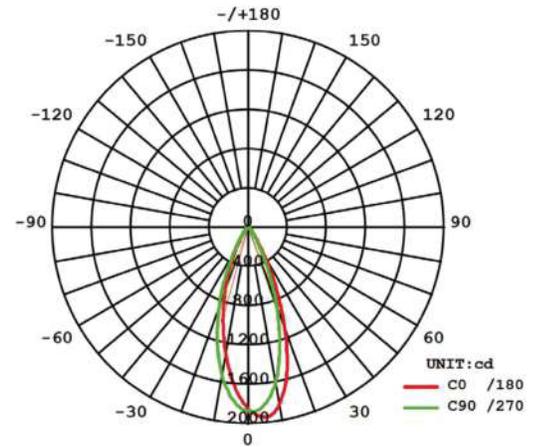

SPECIFICATIONS

Shape:	PAR20
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS

Height:	87mm
Width:	63mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000k	500Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-3K
5W	6500k	500Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP20-01-5W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC019 | 01-2025



LED LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:

- 9W


BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION:

- Outdoors or indoors lighting.
- Shallow ceiling lights.
- Recessed track lighting.
- Flood lighting.
- Precision lighting.
- Landscape lighting.
- Wall mount fixtures.

SHORT NECK

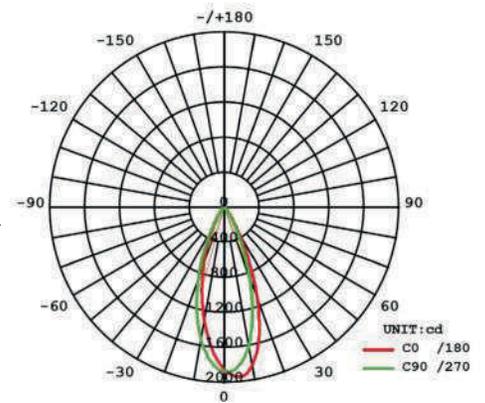

SPECIFICATIONS

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	40°

DIMENSIONS

Height:	87mm
Diameter:	92mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
9W	3000K	900 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-3K
9W	4000K	950 Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-4K
9W	6500K	950Lm	100-240V - 50-60Hz	Non Dimmable	HW-BP30-01-9W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2015 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC020 | 01-2025



LED PAR 30 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 12W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

LONG NECK

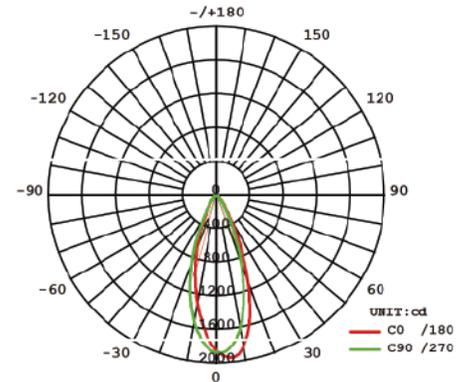

SPECIFICATIONS

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	40°
Certification:	CE

DIMENSIONS

Height:	122mm
Diameter:	95mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
12W	3000K	1200 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-01-12W-3K
12W	4000K	1200 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-01-12W-4K
12W	6500K	1200Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-01-12W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1(888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC023 | 01-2025



LED PAR 30 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 30W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

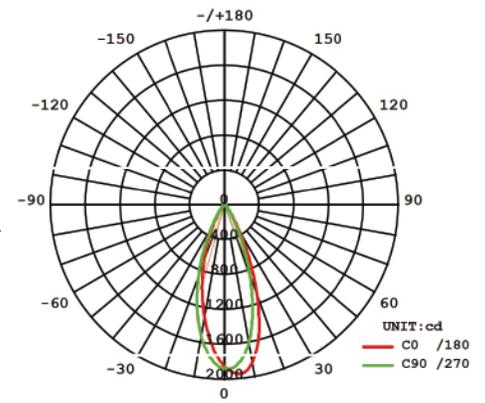

SPECIFICATIONS

Shape:	PAR30
Cap/Fitting:	E27
Beam Angle:	24°
Certification:	CE

DIMENSIONS

Height:	128mm
Width:	95mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
30W	3000K	3000 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-02-30W-3K
30W	4000K	3100 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP30-02-30W-4K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1(888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC020 | 01-2025



LED PAR 30 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 9W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

SHORT NECK

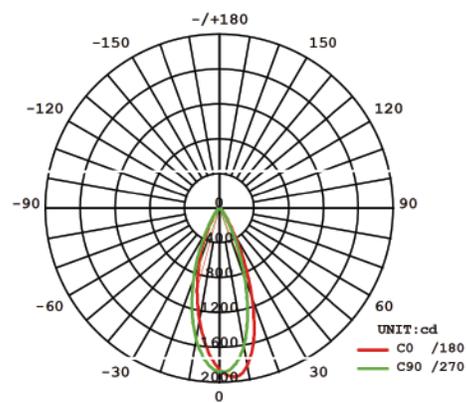

SPECIFICATIONS

Shape:	PAR30
Cap/Fitting:	E26
Beam Angle:	40°
Certification:	UL

DIMENSIONS

Height:	94mm
Diameter:	95mm
Tone:	2700K/ 3000K/ 3500K/ 4000K/ 5000K

AVAILABLE WATTAGE OPTIONS

Power	Brightness	Volt	CCT	Dimmable / Non Dimmable	Model
9W	950 Lm	120V - 50-60Hz	5 Tone CCT Switch	Dimmable	HW-BP30-03-2PK-9W-5CCT-DIMSN

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC024 | 01-2025



LED PAR 30 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 9W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

LONG NECK

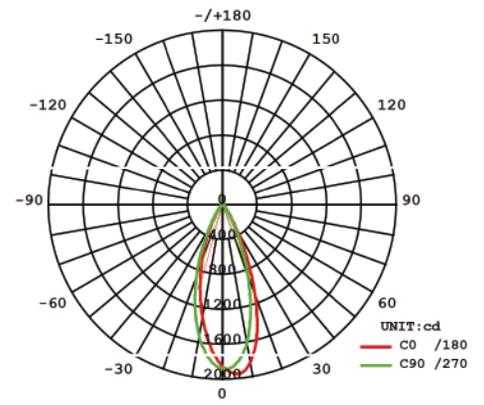

SPECIFICATIONS

Shape:	PAR30
Cap/Fitting:	E26
Beam Angle:	40°
Certification:	UL

DIMENSIONS

Height:	11.8mm
Diameter:	95mm
Tone:	2700K/ 3000K/ 3500K/ 4000K/ 5000K

AVAILABLE WATTAGE OPTIONS

Power	Brightness	Volt	CCT	Dimmable / Non Dimmable	Model
9W	950 Lm	120V - 50-60Hz	5 Tone CCT Switch	Dimmable	HW-BP30-04-2PK-9W-5CCT-DIMLN

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC025 | 01-2025



LED PAR 38 BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 15W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- No heat or UV emissions.
- Instant lighting and the ability to withstand frequent switching.

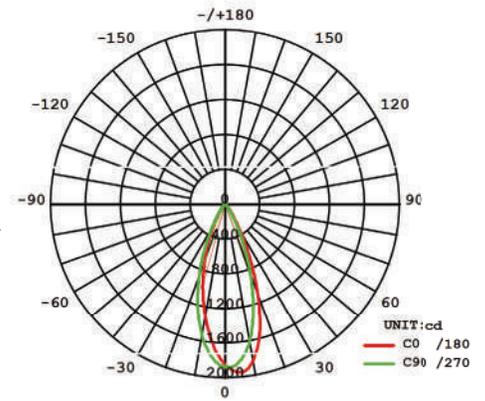

SPECIFICATIONS

Shape:	PAR38
Cap/Fitting:	E27
Beam Angle:	40°
Certification:	CE

DIMENSIONS

Height:	135mm
Diameter:	121mm

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
15W	3000K	1450 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP38-01-15W-3K
15W	6500K	1450 Lm	100-277V - 50-60Hz	Non Dimmable	HW-BP38-01-15W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC100 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 8W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

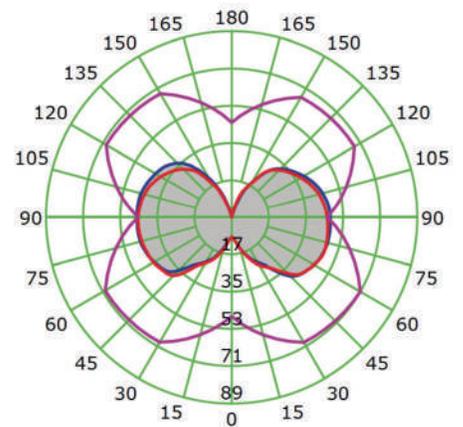

SPECIFICATIONS

Shape:	A60
Cap/Fitting:	E27
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	107mm
Width:	60mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1000 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BA19-04-8W-27K
8W	6500K	1055 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BA19-04-8W-6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC003 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 5W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

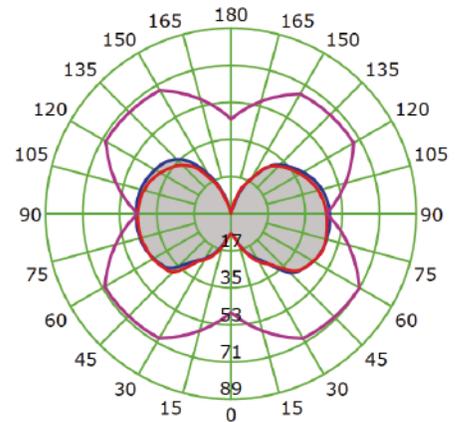

SPECIFICATIONS

Shape: G45
 Cap/Fitting: E27
 Bulb Finish: Transparent

ADDITIONAL INFORMATION

Height: 77mm
 Width: 45mm
 Beam Angle: 320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	2700K	628 Lm	100-130V - 50-60Hz	Dimmable	HW-BG45-01-2PK-5W-DIM27K
5W	6500K	700 Lm	100-130V - 50-60Hz	Dimmable	HW-BG45-01-2PK-5W-DIM6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC008 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 5W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

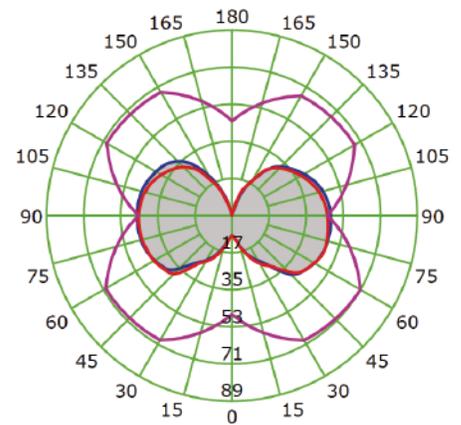

SPECIFICATIONS

Shape:	CANDLE
Cap/Fitting:	E27
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	113mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	2700K	600 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-03-2PK-5W-DIM27K

For more information, please visit www.HoneywellLights-fans.com



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 2W
- 5W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

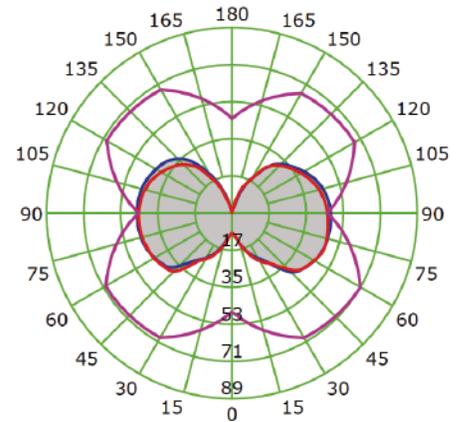

SPECIFICATIONS

Shape:	CANDLE
Cap/Fitting:	E12
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	117mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
2W	2700K	292 Lm	100-130V - 50-60Hz	Non Dimmable	HW-BE12-01-2PK-2W-27K
5W	2700K	650 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM27K
5W	6500K	739 Lm	100-130V - 50-60Hz	Dimmable	HW-BE12-02-2PK-5W-DIM6K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com


©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC004 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE

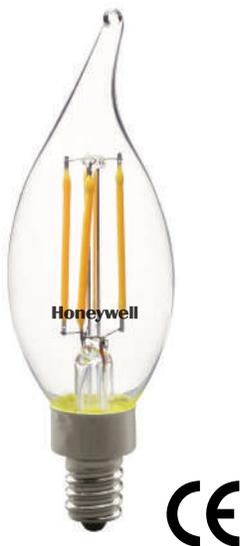


AVAILABLE WATTAGE OPTIONS:

- 5W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

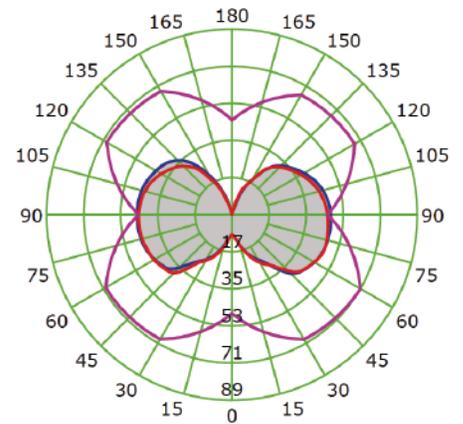

SPECIFICATIONS

Shape:	CANDLE
Cap/Fitting:	E14
Bulb Finish:	Transparent

ADDITIONAL INFORMATION

Height:	118mm
Width:	35mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	2700K	600 lm	100-130V - 50-60Hz	Dimmable	HW-BE14-01-2PK-5W-DIM27K

For more information, please visit www.HoneywellLights-fans.com



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 4W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

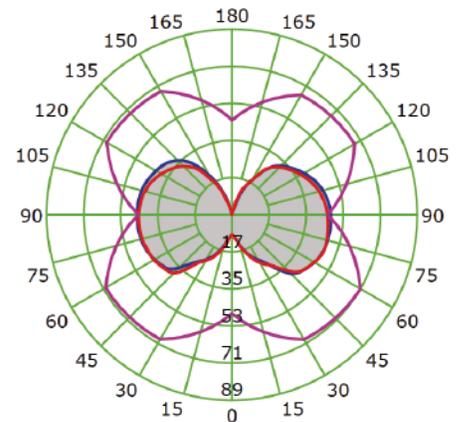

SPECIFICATIONS

Shape:	ST64
Cap/Fitting:	E27
Bulb Finish:	Transparent

DIMENSIONS

Height:	138mm
Width:	64mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
4W	2700K	578 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-04-4W-DIM27K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC0019 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 8W-DIM

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

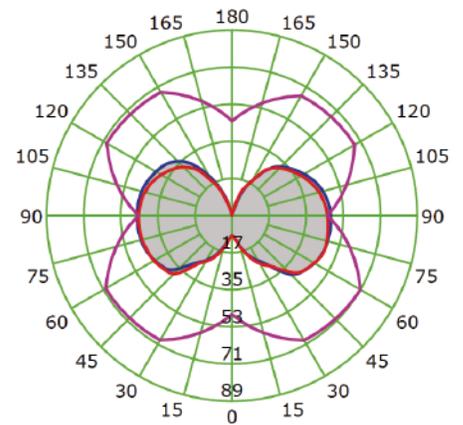

SPECIFICATIONS

Shape:	ST64
Cap/Fitting:	E27
Bulb Finish:	Amber

DIMENSIONS

Height:	138mm
Width:	64mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1055 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-05-8W-DIM27K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas SA.

SPEC007 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 8W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

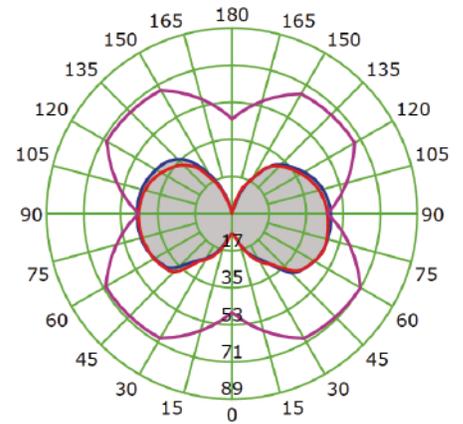

SPECIFICATIONS	
Shape:	G125
Cap/Fitting:	E27
Bulb Finish:	Transparent

ADDITIONAL INFORMATION	
Height:	173mm
Width:	125mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1055 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-06-8W-DIM27K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC006 | 01-2025



LED FILAMENT LIGHT BULB

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 8W

BENEFITS:

- Energy efficiency.
- No visible flickering.
- Color consistency over long lifespan.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.

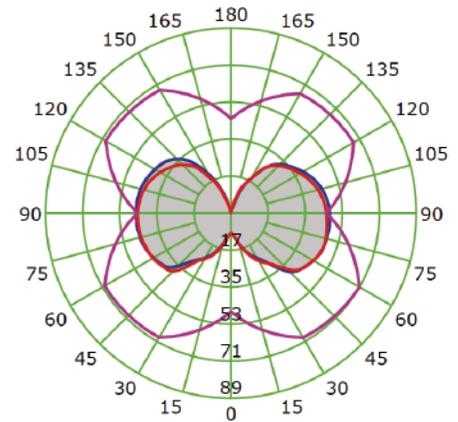

SPECIFICATIONS

Shape:	G125
Cap/Fitting:	E27
Bulb Finish:	Amber

ADDITIONAL INFORMATION

Height:	173mm
Width:	125mm
Beam Angle:	320°

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
8W	2700K	1045 Lm	100-130V - 50-60Hz	Dimmable	HW-BLED-07-8W-DIM27K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1(888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC005 | 01-2025



Honeywell


COMMERCIAL LIGHTS 2026

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILLUMINACIONES TÉCNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

LED PANEL LIGHT
HW-P1X4-05-40W-CCT

Backlit Panel Certified, with high uniform lighting performance.
CCT selectable Switch.

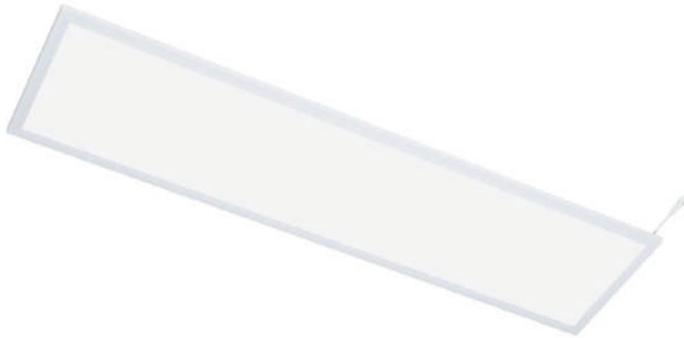

Indoor

FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency
- THD > 20%
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



LED



Life Span
50,000 H



Multi Color
Temperature
(CCT)




Easy
Installation




Save Money

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	White	Input Power	40W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	4000, 4700, 4450 Lm	Dimensions (LxWxH)	295x1195x34 mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117 Lm/W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50 000 Hrs	Operation Temperature	0°C to +40°C		


DIMENSIONS

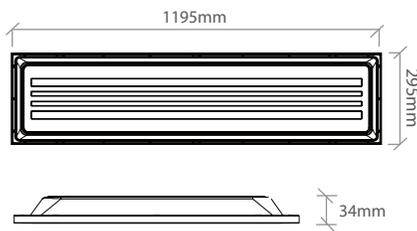



This panel can be installed in two different ways: hanging or recessed.

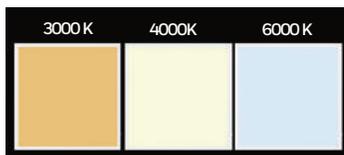


(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

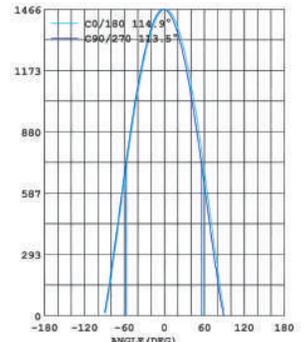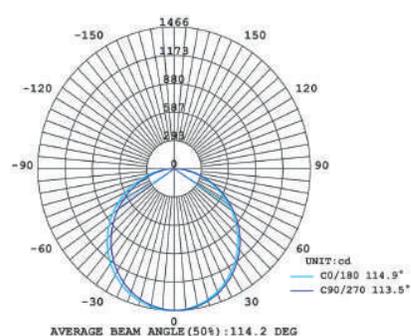

LED PANEL LIGHT
HW-P2X2-05-40W-CCT

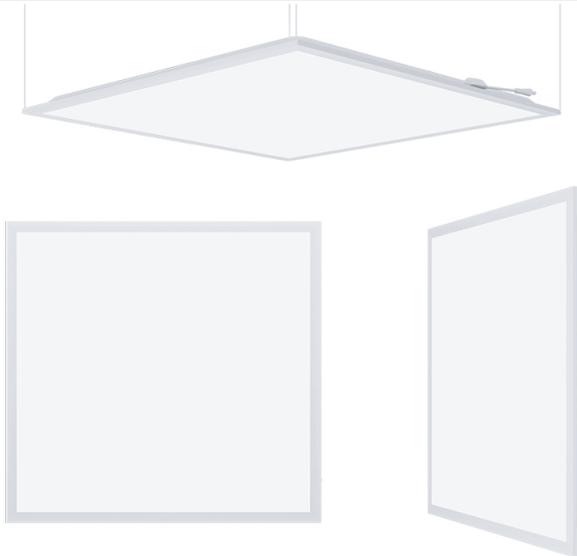

Backlit Panel Certified, with high uniform lighting performance. CCT selectable switch.

FEATURES

- Backlit design without LGP, No risk of yellowing.
- THD>20%
- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas

CE LED IP 20



Multi Color Temperature (CCT)



Easy Installation







\$ Save Money



Life Span 50,000 H

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	White	Input Power	40W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	4100, 4700, 4500Lm	Dimensions (LxWxH)	595x595x34mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117Lm/W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50 000 Hrs	Operation Temperature	00°C to +40°C		

DIMENSIONS | **LUMINOUS INTENSITY DISTRIBUTION**

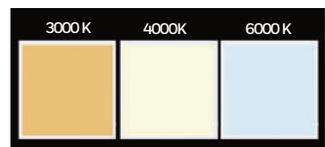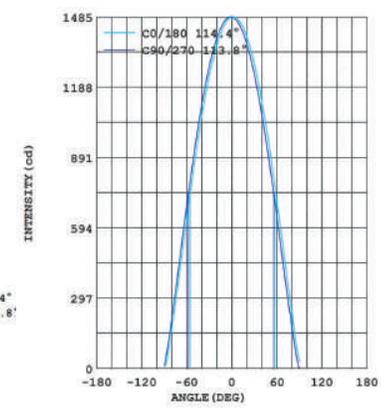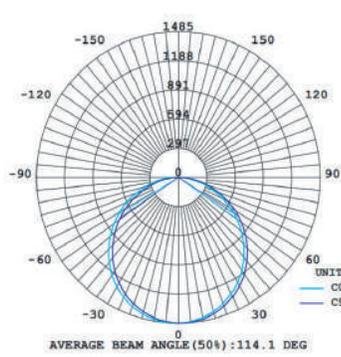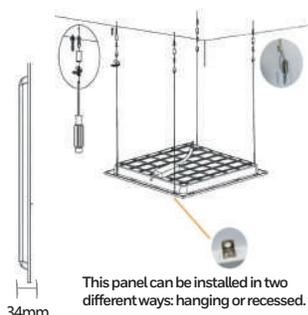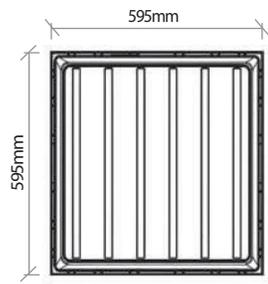

LED PANEL LIGHT
HW-P2X4-05-60W-CCT

Backlit Panel Certified, with high uniform lighting performance. CCT selectable switch.



FEATURES

- Backlit design without LGP, No risk of yellowing.
- Energy efficiency
- THD > 20%
- No UV emissions
- High uniform lighting
- 3 CCT Selectable: 3000K, 4000K, 6000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



LED







Multi Color Temperature (CCT)





OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	White	Input Power	60W
CCT Switchable	YES	Protection Level - IP	IP20	Operating Voltage	120-277 V
Luminous Flux	6600, 7400, 7000 Lm	Dimensions (LxWxH)	1195x595x34mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	11.7 Lm/W	Optical Material	Diffuser PS	Dimmable	NO
Life Span	50 000 Hrs	Operation Temperature	0°C to +40°C		

DIMENSIONS

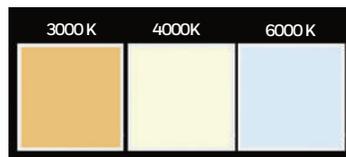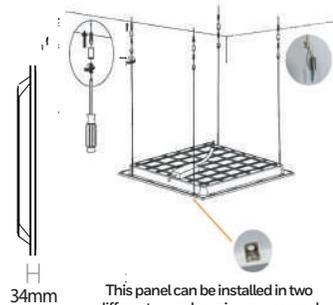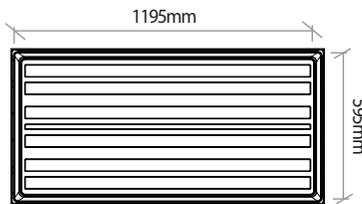

LUMINOUS INTENSITY DISTRIBUTION

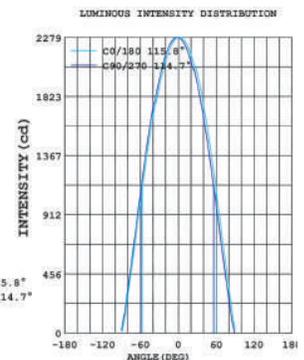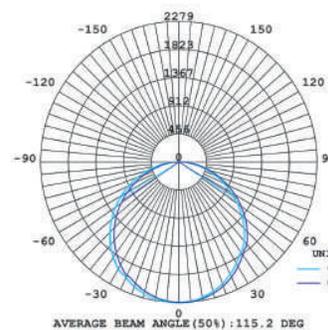

LED PANEL LIGHT
HW-P2X4-04-PS-CCT-UL

Backlit Panel UL Certified, with high uniform lighting performance. CCT selectable switch.



Indoor

FEATURES

- Backlit design without LGP, No risk of yellowing.
- ANSI C82.77-2002 Surge Protector
- THD<20%
- Energy efficiency
- No UV emissions
- High light uniformity
- 3 CCT Selectable: 3500K, 4000K, 5000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



RoHS




Multi Color Temperature (CCT)







Multi Wattage Switchable

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3500K, 4000K, 5000K	Finish	White	Input Power	30W, 35W, 45W
CCT Switchable	YES	Protection Level - IP	IP20	Power Switchable	YES
Luminous Flux	4260/ 4390/6090 Lm	Dimensions (LxWxH)	1214x604x38mm	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Frequency	50-60 Hz
Beam Angle	120°	Body Frame	Aluminium	Power Rating	>0.90
Efficiency	135 Lm/W	Optical Material	Diffuser PC	CRI	80
Life Span	50 000 Hrs	Operation Temperature	-20°C to +40°C	Dimmable	0-10V

DIMENSIONS

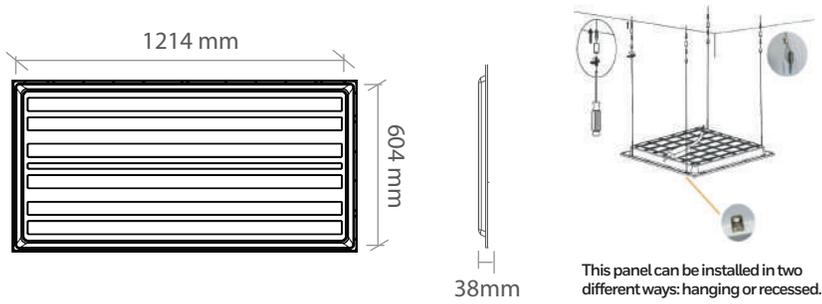

LUMINOUS INTENSITY DISTRIBUTION

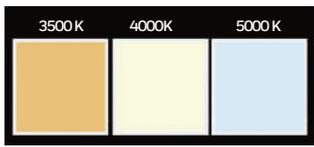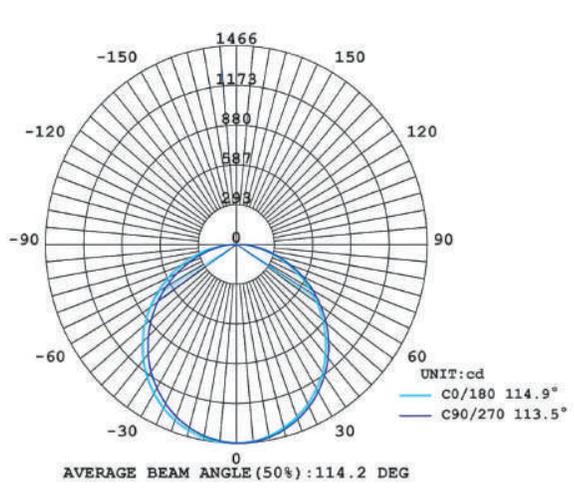

LED PANEL LIGHT
HW-P2X2-04-PS-CCT-UL



Backlite panel UL Certified, with high uniform lighting performance. watt and CCT selectable

FEATURES

- ANSI C82.77-2002 Surge Protector
- THD<20%
- Excellent surface treatment
- Light in weight and more like traditional grille light, better for user experience.
- Backlit design without LGP, No risk of yellowing.
- Fully Automated production lines guarantees short lead time.
- 3 CCT Selectable: 3500K, 4000K, 5000K could be adjusted with a switch

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- And others

Indoor



RoHS



OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3500K, 4000K, 5000K	Finish	White	Input Power	35W
CCT Switchable	YES	Protection Level - IP	IP20	Power Switchable	YES
Luminous Flux	5330 lm	Dimensions (LxWxH)	604x604x38mm	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Recessed or Hanging	Frequency	50-60 Hz
Beam Angle	120°	Body Frame	Aluminium	Power Rating	>0.90
Efficiency	150 Lm/W	Optical Material	Diffuser PC	CRI	80
Life Span	50 000 Hrs	Operation Temperature	-20°C to +40°C	Dimmable	0-10V

DIMENSIONS


This panel can be installed in two different ways: hanging or recessed.

Power Selectable Switch

20W 30W 35W


(CCT) Color Temperature Switch

3500K 4000K 5000K

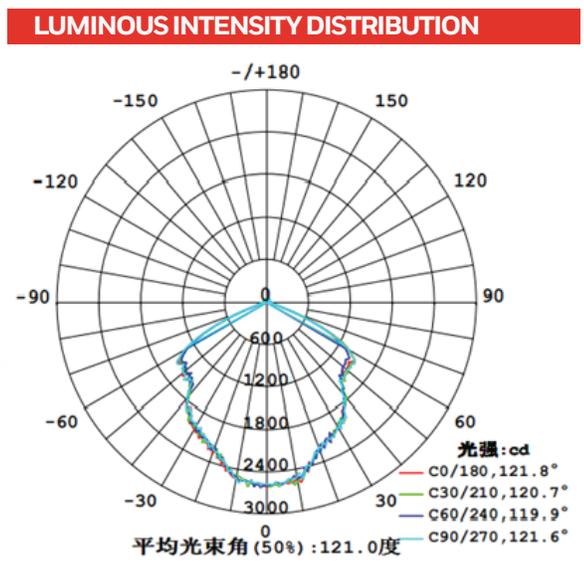

LED PANEL LIGHT

HW-P2X2-06-40W-65K

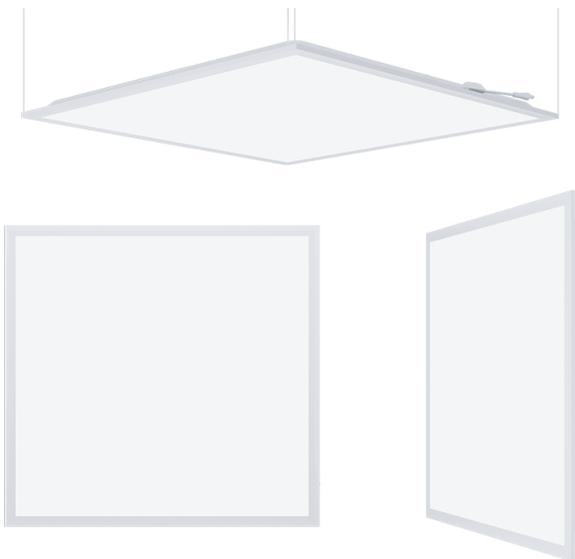

Backlit Panel Certified, with high uniform lighting performance.

FEATURES

- Backlit design without LGP, No risk of yellowing.
- THD > 20%
- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting

APPLICATION

- Classroom
- Office
- Meeting Room
- Shopping Mall
- Commercial Areas
- Hospitality and retail areas



LED

IP 20



Easy
Installation




Save
Money




Life Span
50,000 H

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	6500K	Finish	White	Input Power	40W
Luminous Flux	4000Lm	Protection Level - IP	IP20	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Dimensions (LxWxH)	600x600x30mm	Frequency	50-60Hz
Beam Angle	120°	Type of Installation	Recessed or Hanging	Power Rating	>0.90
Efficiency	100Lm/W	Body Frame	Aluminium	CRI	80
Life Span	50 000 Hrs	Optical Material	Diffuser PS	Dimmable	NO
		Operation Temperature	00 °C to +40°C		

DIMENSIONS

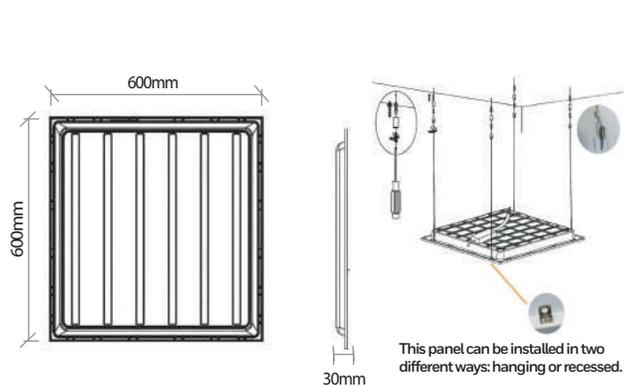

LUMINOUS INTENSITY DISTRIBUTION

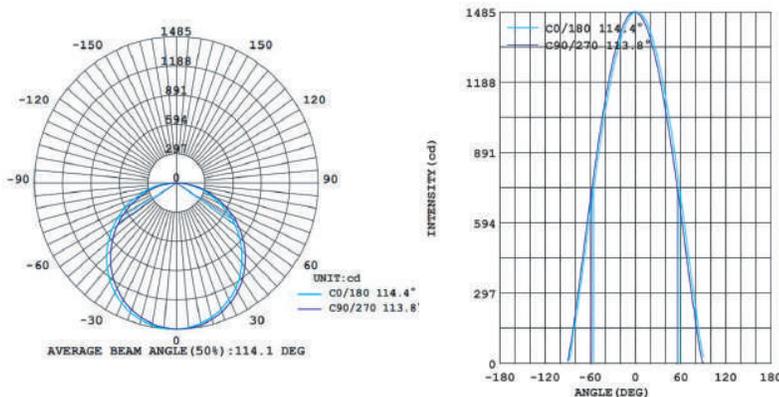

LED TRI-PROOF LIGHT

HW-TRI-03-20W-65K / HW-TRI-04-40W-65K



HW-TRI-03-20W-65K



HW-TRI-04-40W-65K

The LED Tri-Proof Light IP20 is a reliable and efficient indoor lighting solution designed for durability and performance. With selectable power options of 20W and 40W, and a consistent light color temperature of 6500K, it provides bright, uniform illumination ideal for commercial and residential spaces.

FEATURES

- High luminous efficiency LED chip and driver.
- Available in 20W and 40W.
- Fixed CCT: 6500K daylight.
- Long lifespan, energy-saving, eco-friendly.

APPLICATION

- Residential Areas
- Schools
- Retail stores and supermarkets.
- And others





LED




OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	6500K	Finish	White	Operating Voltage	100-277V
Beam Angle	120°	Protection Level - IP/IK	IP20	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Ceiling Mountable	Power Rating	> 0.50
HW-TRI-03	HW-TRI-04	Body Frame	PC	CRI	80
Luminous Flux		Optical Material	Diffuser PC	HW-TRI-03	HW-TRI-04
2000 lm	4000 lm	Operation Temperature	-20°C to +40°C	Input Power	
		HW-TRI-03	HW-TRI-04	20W	40W
		Dimensions			
		600 X 75 X 25mm	1200 X 75 X 25mm		

DIMENSIONS

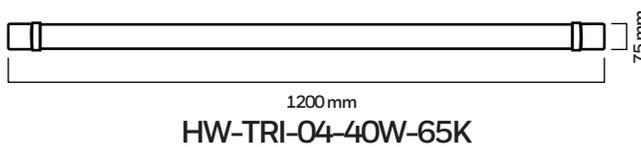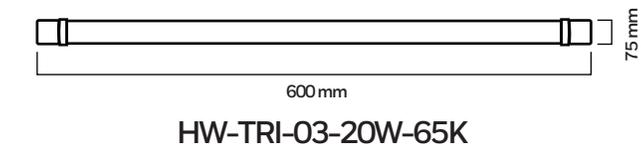

LUMINOUS INTENSITY DISTRIBUTION

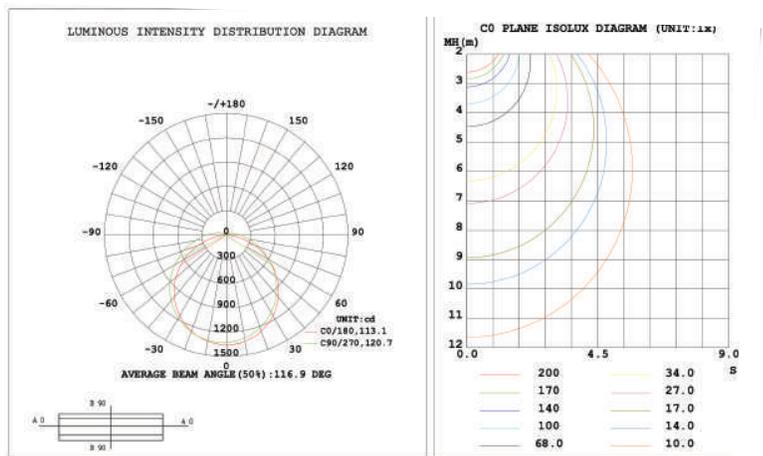

TRIPROOF FIXTURE WITH T8 LED TUBE GLASS INCLUDED

HW-TRI-05-36W-65K

Hermetic industrial luminaire, smooth and elegant appearance.



FEATURES

- UV protection
- IP65
- Fast connection
- Easy relamping method
- Clear prismatic optical cover
- Long life Functionality
- Light Efficiency: 3600Lm

APPLICATION

- Industrial Areas
- Sidewalks
- Parks
- Schools
- And Others



LED




UV Protection




OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	6500K	Finish	Gray & White	Input Power	2x18W T8 LED tube included
Luminous Flux	3600 Lm	Protection Level - IP	IP65	Operating Voltage	100-277 V
Type of Distribution	Direct Symmetrical	Dimensions (LxWxH)	1270x93x52 mm	Frequency	50-60 Hz
Opening Angle	80	Type of Installation	Surface Mounted	Power Factor	>0.5
Power	36W	Body Frame	PC	CRI	80
Life Span	25 000 Hrs	Optical Material	Diffuser PC	Dimmable	NO

DIMENSIONS

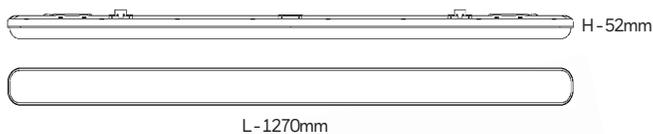

LUMINOUS INTENSITY DISTRIBUTION

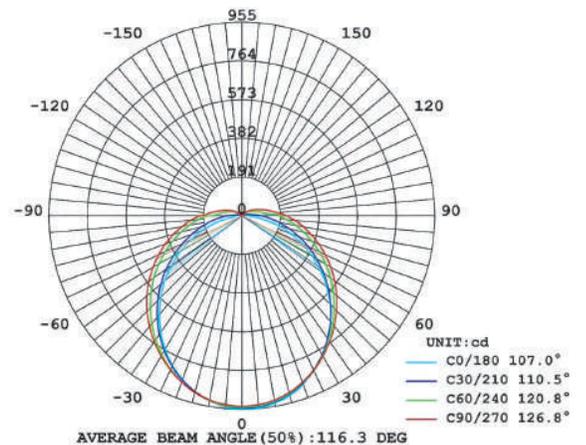

LED TRI-PROOF LIGHT

HW-TRI-01-PS-65K



Hermetic industrial luminaire, clipless design, smooth and elegant appearance, no need to open the diffuser to connect with safe and reliable protection level
Switchable power: 30W, 40W or 50W.

FEATURES

- UV protection
- Built in high luminous efficiency LED Chip and Driver
- IP65/IK08
- 3 Level Power Switchable
- Fast connection
- Light Efficiency: 100-118lm/W

APPLICATION

- Industrial Areas
- Sidewalks
- Parks
- Schools
- And Others



LED



Multi Wattage Switchable



Eco Friendly

UV


Protection




Easy Installation

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	6500 K	Finish	Gray & White	Input Power	30W, 40W, 50W
Luminous Flux	3540,4280,5170 Lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	120°	Dimensions (LxWxH)	1200x70x56 mm	Operating Voltage	100-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Surface Mounted	Frequency	50-60 Hz
Opening Angle	80	Body Frame	PC	Power Factor	>0.9
Efficiency	100-118 Lm/W	Optical Material	Diffuser PC	CRI	80
		Operation Temperature	-20°C to +40°C	Dimmable	NO

DIMENSIONS

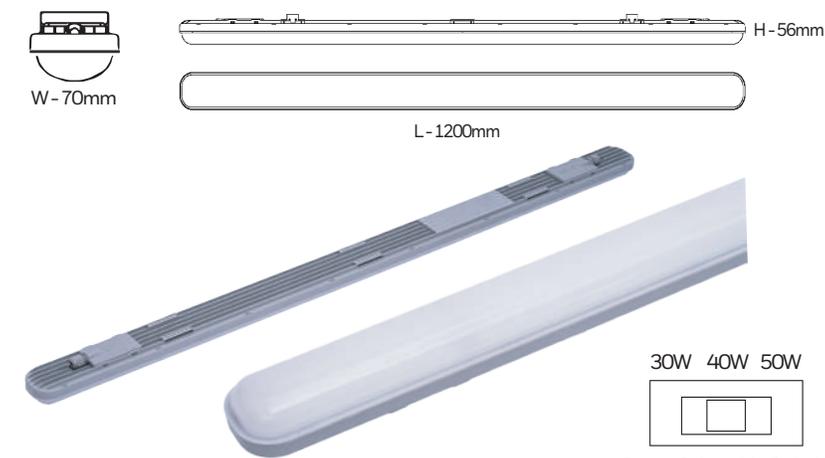

LUMINOUS INTENSITY DISTRIBUTION

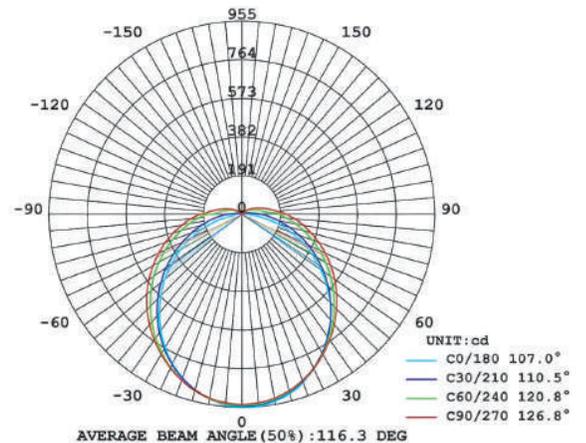

LED TRI-PROOF LIGHT

HW-TRI-02-36W-65K



Indoor

Dust-tight LED luminaire, clipless design, for environments with high humidity and dirt, such as parking lots, industrial facilities, food processing plants or kitchens. with two mounting options, surface or suspended from the ceiling.

Power: 36W
Cool Day Light

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Water Proof


APPLICATION

- Residential Areas
- Sidewalks
- Parks
- Schools
- And others




OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	6500K	Finish	White	Input Power	36W
Luminous Flux	4700lm	Protection Level - IP/IK	IP 65/IK07	Power Switchable	NO
Beam Angle	120°	Dimensions (LxWxH)	1200X63X33mm	Operating Voltage	100-277V
Type of Distribution	Direct Symmetrical	Type of Installation	Ceiling Mountable	Frequency	50-60 Hz
		Body Frame	PC	Power Rating	> 0.50
		Optical Material	Diffuser PC	CRI	80
		Operation Temperature	-20°C to +40°C	Dimmable	Non Dimmable

DIMENSIONS

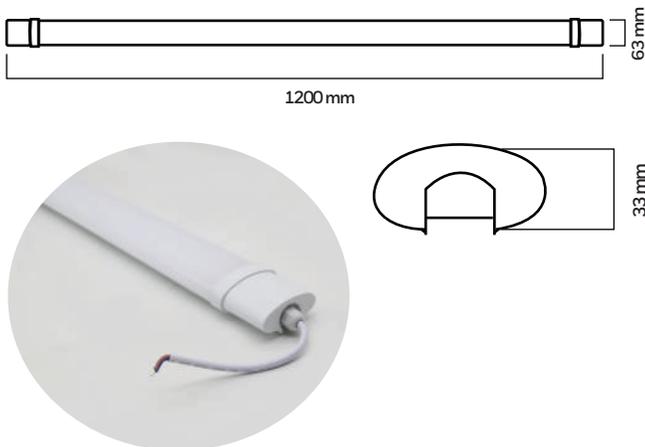

LUMINOUS INTENSITY DISTRIBUTION

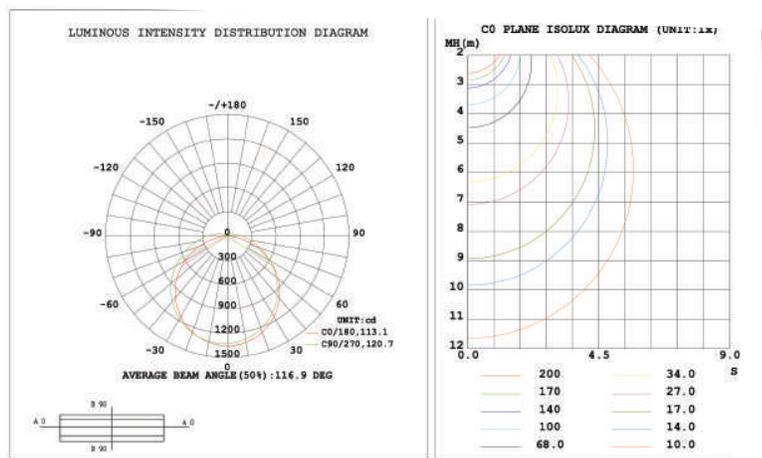

LED LINEAR LIGHT

HW-LI01-40W-CCT



LED Linear luminaire, homogeneous light distribution without shadows, for a continuous, clean and simple lighting system. Modern and compact design with LED strip and opalized diffuser.

With 3 installation methods: hanging, surface-mounted, or recessed/Trimless

FEATURES

- 3 Color Switchable Selection 3000K/4000K/6500K
- 1.5 Mt Hanging Kit Adjustable
- Ability to operate in cold conditions.
- Design flexibility.
- General lighting for limited build-in height.
- Instant lighting and the ability to withstand frequent switching.

APPLICATION



Indoor

- Offices
- Stores
- Residential
- Commercial Areas
- Educational Institutions
- And Others




OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6500K	Finish	Black/White	Input Power	40W
Luminous Flux	4000 Lm	Protection Level - IP	IP20	Driver Type	Isolated Driver
Beam Angle	110°	Dimensions (LxWxH)	1191x50x70 mm	Operating Voltage	100-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	3 Type of Installation	Frequency	50-60 Hz
Efficiency	100 Lm/W	Body Frame	Aluminium	CRI	80
		Optical Material	PMMA	Operation Temperature	-20°C to +40°C

DIMENSIONS

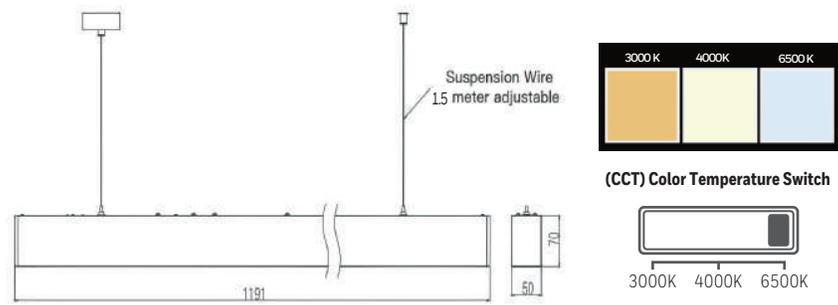


(CCT) Color Temperature Switch



Select one of the following 3 installation methods :



LUMINOUS INTENSITY DISTRIBUTION

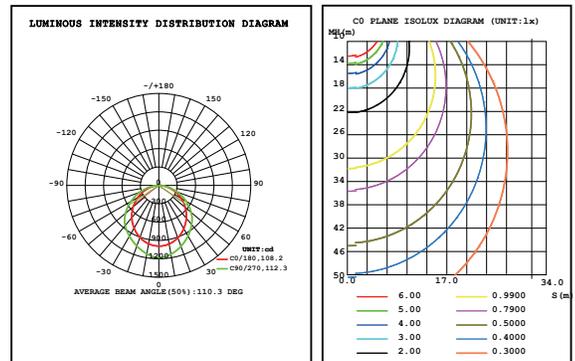

LED LINEAR LIGHT

HW-LI01



LED accessories for linear lighting fixtures. Aluminum connection modules designed to create L, T and X configurations for LED linear luminaires. Provide seamless continuity, uniform illumination, and modern architectural aesthetics. Easy to install and connect, with CCT switch (3000K/4000K/6500K). Ideal for commercial and professional lighting systems.

FEATURES

- Aluminum extruded body with durable finish
- CCT color selection 3000K/4000K/6500K
- Surface or ceiling mounting

APPLICATION

- Residential
- Commercial Corridors
- Offices
- Supermarkets
- Showrooms



SPECIFICATIONS

Color Temperature (CCT)	3000K, 4000K, 6500K
Finish	White or Black


ELECTRICAL DATA

CRI	80
Protection Level - IP	IP20


AVAILABLE OPTIONS

Power	3 CCT Tone	Lumens	Volt	Dimmable / Non Dimmable	Model
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Dimmable 0-10V	HW-LI01-20W-CCT-WH-DIM-X
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Dimmable 0-10V	HW-LI01-20W-CCT-BK-DIM-X
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Dimmable 0-10V	HW-LI01-20W-CCT-WH-DIM-T
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Dimmable 0-10V	HW-LI01-20W-CCT-BK-DIM-T
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Dimmable 0-10V	HW-LI01-20W-CCT-WH-DIM-L
20W	3000K, 4000K, 6500K	2400Lm	100-277V/50-60Hz	Dimmable 0-10V	HW-LI01-20W-CCT-BK-DIM-L
20W	3000K, 4000K, 6500K	2000Lm	100-277V/50-60Hz	Non Dimmable	HW-LI01-20W-CCT-CORNER-WH
20W	3000K, 4000K, 6500K	2000Lm	100-277V/50-60Hz	Non Dimmable	HW-LI01-20W-CCT-CORNER-BK

DIMENSIONS

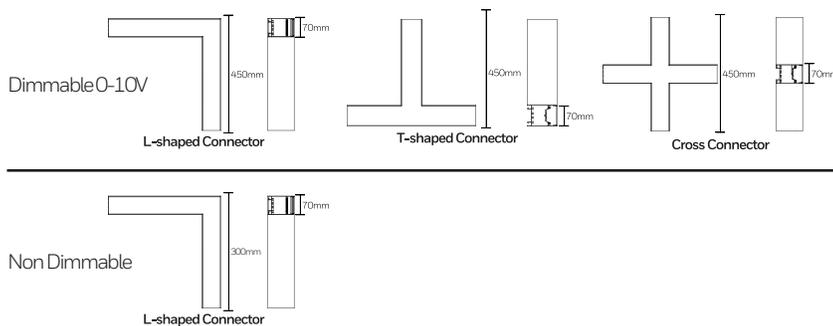

LUMINOUS INTENSITY DISTRIBUTION

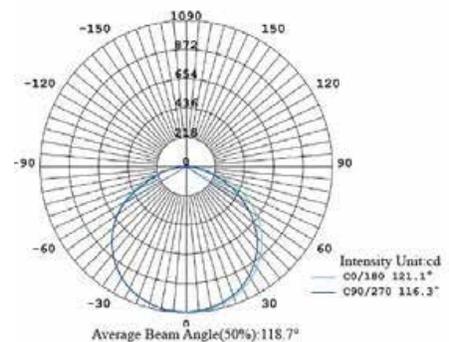

LED TRACK LIGHT

HW-TK-01-PS-CCT



The LED Track Light is a modern, versatile, and energy-efficient lighting solution designed to highlight spaces with precision and style. Built eco-friendly with no mercury and up to 85% energy saving, it combines advanced technology with an elegant design for both commercial and residential indoor use.

FEATURES

- Eco-friendly, no mercury, 85% energy saving.
- Selectable power: 20W / 30W / 40W.
- Adjustable CCT: 3000K / 4000K / 6500K.
- CRI 90 for true and vibrant colors.

APPLICATION

- Retail stores and commercial areas.
- Restaurants and cafés.
- Showrooms and offices.
- Modern residential spaces.

Indoor



LED



Multi Wattage
Switchable



Multi Color
Temperature
(CCT)



Easy
Installation

OPTICAL DATA

Color Temperature (CCT)	3000K, 4000K, 6500K
Lumen Output	2000/3000/4000 Lm
Beam Angle	36°
Type of Distribution	Direct Symmetrical



PHYSICAL DATA

Finish	White or Black
Protection Level - IP	IP20
Dimensions (LxWxH)	91x158mm
Type of Installation	Surface Mounted
Body Frame	Die Cast Aluminium
Optical Material	Diffuser PC

ELECTRICAL DATA

Input Power	20W, 30W, 40W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
CRI	90

DIMENSIONS

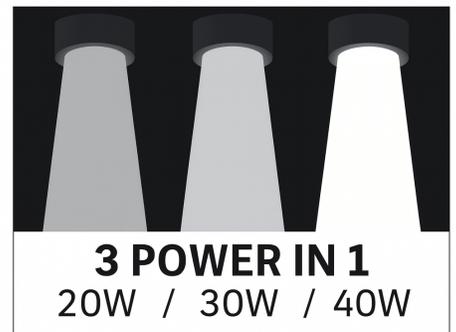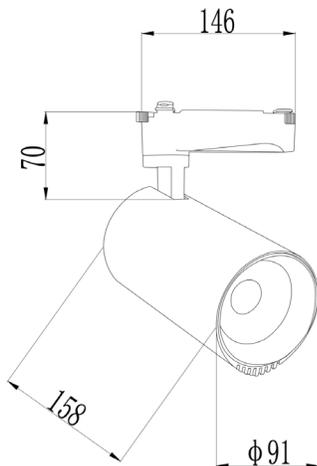

LED STREET LIGHT
HW-ST-01-PS-CCT



LED luminaire for street and outdoor lighting, modern and compact design, uniform light projection, high efficiency, long life and easy installation, reduces energy consumption and maintenance costs.

FEATURES

- Heavy Duty Die Cast aluminum housing with ample heat sinking.
- Angle of inclination adjustable in $\pm 90^\circ$.
- Slipfit Arm included
- IP65/IK08/4KV Rating.
- Long Lifespan.

APPLICATION

Outdoor

- Park
- Square
- Trails
- Public or Private roads
- Parking lot
- Bridges
- Residential buildings
- And others



PHOTOCELL SENSOR



Multi Color Temperature (CCT)



Multi Wattage Switchable



Eco Friendly




Water Proof

OPTICAL DATA	
Color Temperature (CCT)	4000K, 5000K, 6000K
Lumens	16,856 lm/24,359 lm/30,455lm
Beam Angle	80x150° Type III
Type of Distribution	Direct Symmetrical
Life Span	50 000 H
Optical Material	Diffuser PC


PHYSICAL DATA	
Finish	Dark Bronze
Protection Level-IP	IP65
Dimensions (LxWxH)	300x438x62mm
Body Frame	Die-Cast Aluminium
Weight	5.22 kg
Operation Temperature	-40°C to +50°C

ELECTRICAL DATA	
Input Power	100W, 150W, 200W
Power Switchable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS

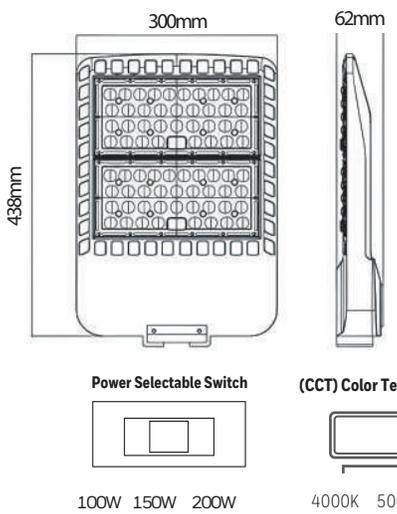

LUMINOUS INTENSITY DISTRIBUTION

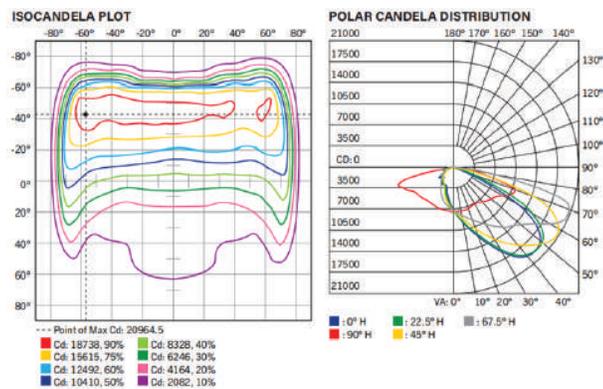

LED WALL LAMP
HW-WP-01-PS-CCT



Rugged, die-cast housing with advanced thermal management system ensures reliability and durability. Weather-proof, gasketed driver compartment protects electronics against environmental elements.
Tunable CCT for 4000K, 5000K, 6000K, Color Temperature Options
Anti-UV Prismatic Translucent Lens Designed to Shape the Light Distribution and Uniformity.
Mounting via J-box or Surface Conduit
Casting Thermally Conducts LED Heat to Optimize Performance and Long Life
Pre-Installed Photocell Sensor

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection
- IP65

APPLICATION

- Industrial Areas
- Schools
- Sidewalks
- Residential

Outdoor



PHOTOCELL SENSOR



Multi Wattage Switchable



Multi Color Temperature (CCT)




Easy Installation





Water Proof

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	4000K, 5000K, 6000K	Finish	Black	Input Power	15W, 20W, 30W
Lumens	2,359 lm / 3,213 lm / 4480 lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	100°	Dimensions	144x224x85mm	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Surface Mounted	Frequency	50-60 Hz
Life Span	50 000 Hrs	Body Frame	Die-Cast Aluminium	Power Factor	>0.95
Weight	0.52 kg	Optical Material	Diffuser PC	CRI	70
		Operation Temperature	-40°C to +50°C		

DIMENSIONS

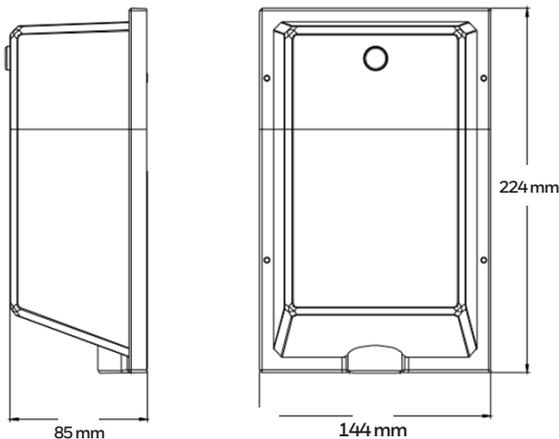

LUMINOUS INTENSITY DISTRIBUTION

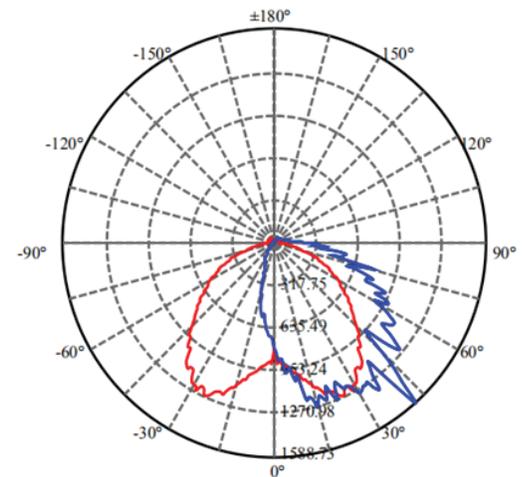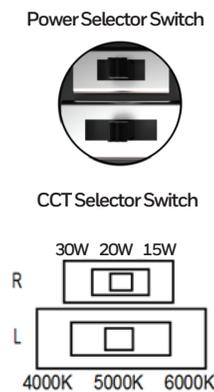

LED WALL LAMP

HW-WP-02-PS-CCT



Two-Piece Die-Cast Aluminum Housing with Thermally Conductive LED Panel and Electrical Chamber
 Tunable CCT for 4000K, 5000K, 6000K, Color Temperature Options
 Anti-UV Prismatic Translucent Lens Designed to Shape the Light Distribution and Uniformity.
 Mounting via J-box or Surface Conduit

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection
- IP65

APPLICATION

- Industrial Areas
- Parks
- Sidewalks
- Schools
- Squares
- And others.

Indoor / Outdoor



LED



Multi Wattage Switchable



Multi Color Temperature (CCT)



Easy Installation






Water Proof

OPTICAL DATA	
Color Temperature (CCT)	4000K, 5000K, 6000K
Luminous Flux	6,275 lm / 9160 lm / 12,619
Beam Angle	100°
Type of Distribution	Direct Symmetrical
Life Span	50 000 Hrs


PHYSICAL DATA	
Finish	Dark Bronze
Protection Level - IP	IP65
Dimensions	316x175x152 mm
Type of Installation	Surface Mounted
Body Frame	Die-Cast Aluminium
Weight	2.05 Kg
Operation Temperature	-40°C to +50°C

ELECTRICAL DATA	
Input Power	35W, 55W, 80W
Power Switchable	YES
Operating Voltage	120-277V
Frequency	50-60 Hz
Power Factor	>0.95
CRI	70

DIMENSIONS

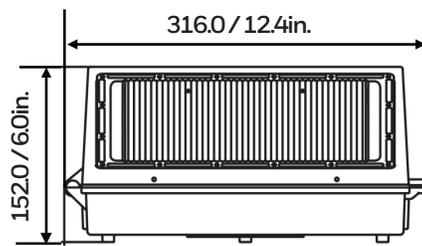

LUMINOUS INTENSITY DISTRIBUTION

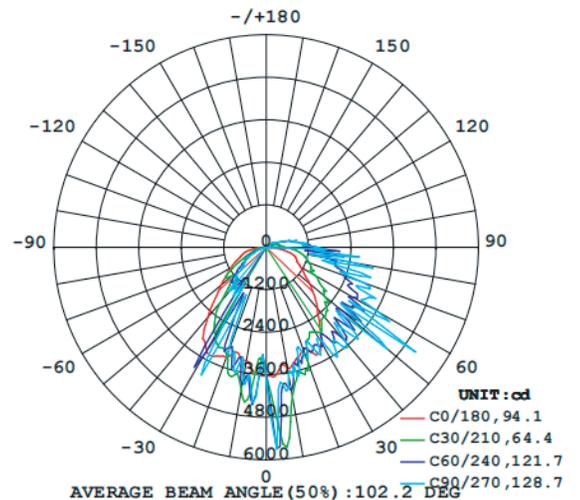

LED CANOPY LAMP

HW-CAN-01-PS-CCT



The CAN-01 Selectable Canopy Light is a contractor experience LED canopy light - designed to save you money, save you time, and install quickly. 3 selectable lumen outputs for different ceiling heights and 3 selectable CCT color outputs. Fast installation that's prime for an easy retrofit - engineered with your experience first.

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- 3 Level Power Switchable
- Fast connection, IP65

APPLICATION

- Industrial Areas
- Sidewalks
- Commercial Areas
- Parks
- Schools
- And others.

Indoor / Outdoor



LED



Multi Wattage Switchable



Multi Color Temperature (CCT)





Easy Installation





Water Proof

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	4000K, 5000K, 6000K	Finish	White	Input Power	40W, 60W, 80W
Lumens	6,446 lm / 9072 lm / 12648 lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	120°	Dimensions (LxWxH)	265x265x84 mm	Operating Voltage	120-277 V
Type of Distribution	Direct Symmetrical	Type of Installation	Surface Mounted	Frequency	50-60 Hz
Life Span	50 000 H	Body Frame	Die Cast Aluminium	Power Factor	>0.95
Weight	2.2kg	Optical Material	Diffuser PC	CRI	70
		Operation Temperature	-40°C to +50°C		


DIMENSIONS LUMINOUS INTENSITY DISTRIBUTION

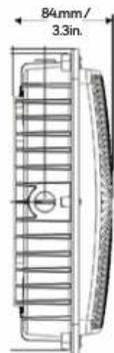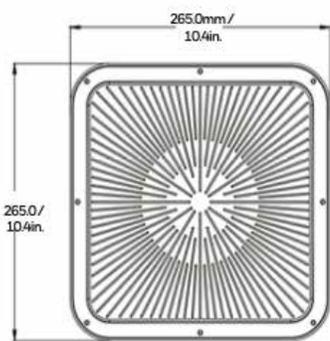

Power Selector Switch



CCT Selector Switch

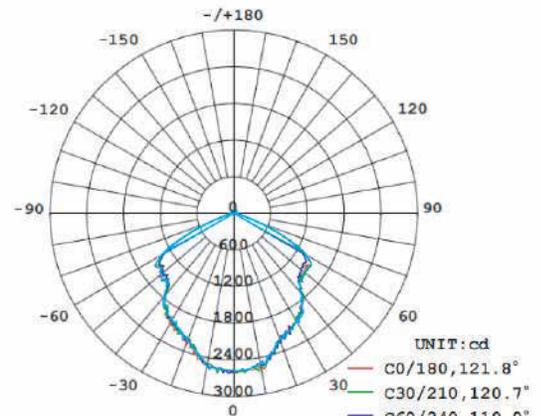

AVERAGE BEAM ANGLE (50%) : 121.0 DEG

LED CANOPY LAMP

HW-CAN-02



The CAN-02 Selectable Canopy Light is a contractor experience LED canopy light - designed to save you money, save you time, and install quickly. Fast installation that's prime for an easy retrofit - engineered with your experience first.

FEATURES


- Most suitable for commercial and industrial premises with over 4 meters high ceilings, such as shopping mall, shopping center, office, airport, indoor gymnasium, warehouse, factory, etc.
- Distinctive Square Appearance. Concise and flat design, large light-emitting area.
- Unique square and flat design saving packaging cost.

APPLICATION

- Industrial Areas
- Sidewalks
- Commercial Areas
- Parks
- Schools
- And others.

Indoor / Outdoor

CE ErP LED



Multi Wattage Switchable



Multi Color Temperature (CCT)





Easy Installation



Water Proof

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	4000K, 5000K, 6500K	Finish	White	Input Power	100W, 150W, 200W
Lumens	16500lm/24750lm/33000lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	75°	Dimensions (LxWxH)	425x320x100mm	Operating Voltage	100-277 V
Life Span	123,000H@L70B50	Type of Installation	Surface Mounted	Frequency	50-60 Hz
Weight	5.6kg	Body Frame	Die Cast ADC12	Power Factor	>0.95
		Optical Material	Polycarbonate	CRI	80
		Operation Temperature	-30°C to +50°C		

LIGHT DISTRIBUTION CURVE

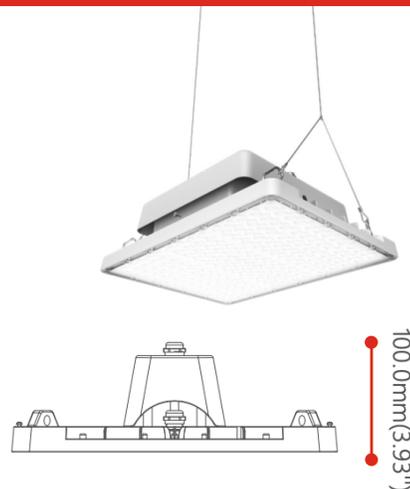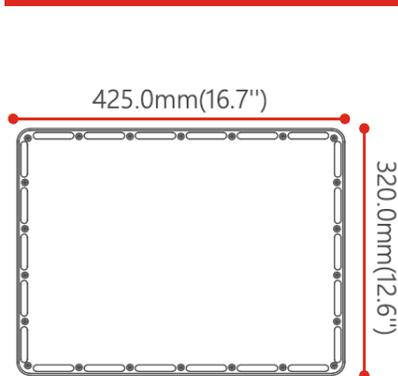

LUMINOUS INTENSITY DISTRIBUTION



UFO HIGHBAY

HW-UFO-01-100W-PS-CCT



Power Selectable: 3-IN-ONE, 60W, 80W, 100W
 3 CCT Selectable: 3000K, 4000K, 6000K
 3 beam angles Selectable: 60°, 90°, 110° with zommable optic design by simple rotation
 Tool free Installation and Maintenance
 The ripple-like lens cover diffuses the dazzling light generated by individual LEDs.

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Adjustable Beam Angle

APPLICATION

- Factory Workshop
- Warehouse
- Parking Lot
- Conference Room
- Storage Room
- Sports Field

Indoor



CE IP65



Multi Beam Angle Switchable




Multi Wattage Switchable



Multi Color Temperature (CCT)

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	Black	Input Power	60W, 80W, 100W
Luminous Flux	10890, 13200, 16500 Lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	60°, 90°, 110° Adjustable	Dimensions	240X157 mm	Operating Voltage	100-277V
Type of Distribution	Direct Symmetrical	Type of Installation	Hanging, Ceiling, Wall	Frequency	50-60 Hz
Optical Material	Diffuser PC	Body Frame	Aluminium	Power Factor	>0.9
Life Span	50 000 Hrs	Weight	1.56 kg	CRI	80
		Operation Temperature	-30°C to +45°C	Dimmable	NO

DIMENSIONS

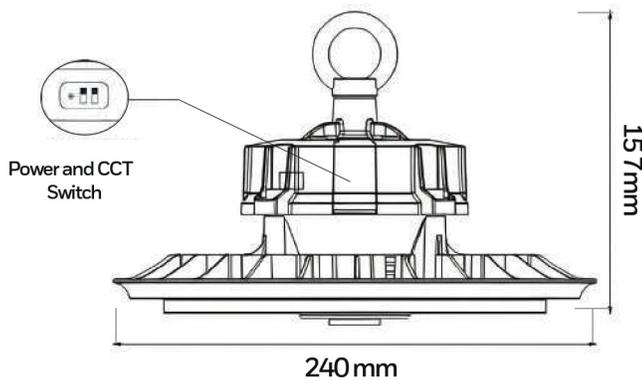



ADDITIONAL INFORMATION

New heat dissipation system to ensure long lifetime




UFO HIGHBAY

HW-UFO-01-100W-PS-CCT


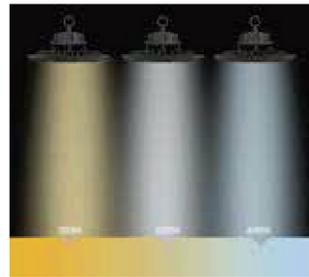
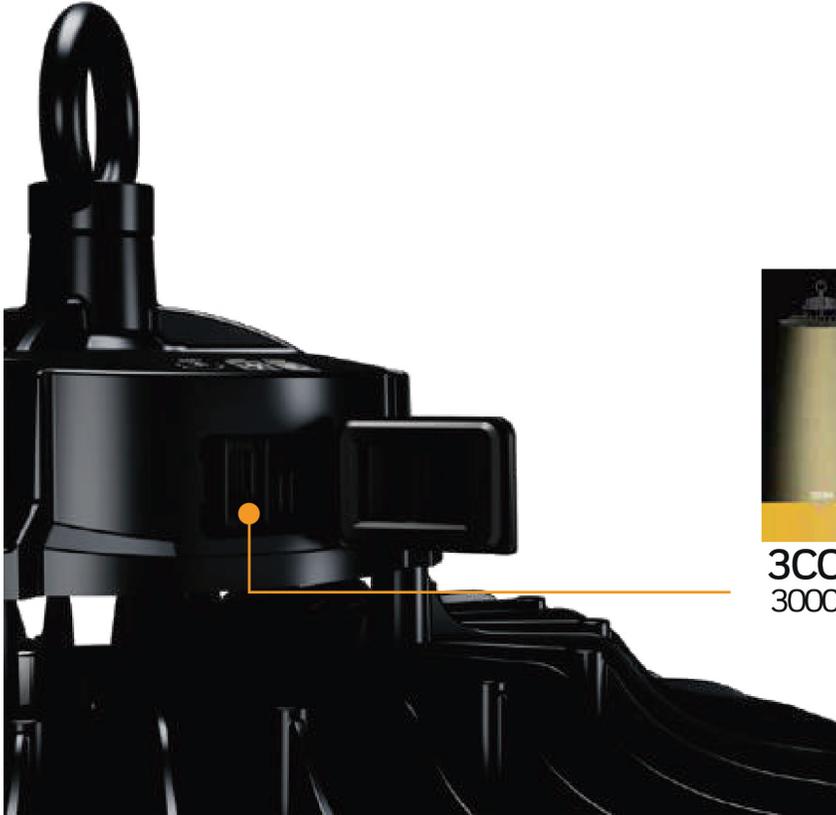


3CCT Selectable
3000K, 4000K, 6000K

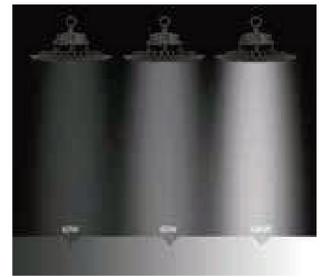

3 Power-in-1
60W/80W/100W
selectable

Rotate the lens to change the beam Angle

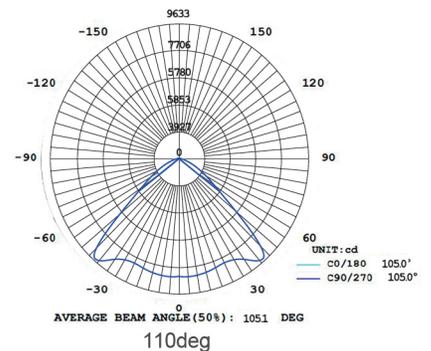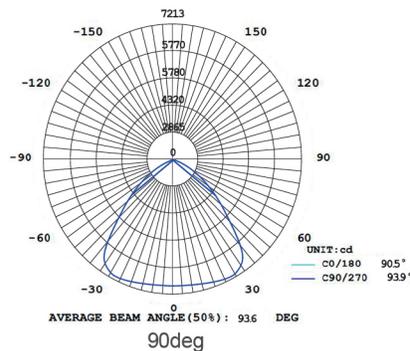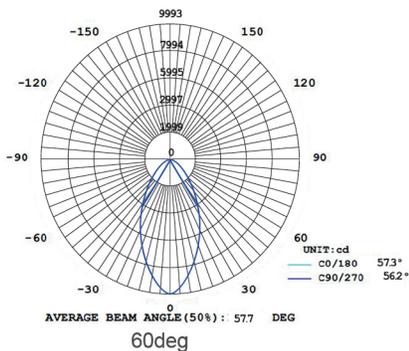

UFO HIGHBAY

HW-UFO-01-200W-PS-CCT



Indoor

Power Selectable: 3-IN-ONE, 110W, 150W, 200W

3 CCT Selectable: 3000K, 4000K, 6000K

3 beam angles Selectable: 60°, 90°, 110° with zommable optic design by simple rotation Tool free Installation and Maintenance

The ripple-like lens cover diffuses the dazzling light generated by individual LEDs.

FEATURES

- Built in high luminous efficiency LED Chip and Driver.
- Fast connection
- IP65
- Adjustable Beam Angle

APPLICATION

- Factory Workshop
- Warehouse
- Parking Lot
- Conference Room
- Storage Room
- Sports Field



CE IP65



Multi Beam Angle Switchable




Multi Wattage Switchable



Multi Color Temperature (CCT)

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	Black	Input Power	110W, 150W, 200W
Luminous Flux	19500, 26400, 34600 Lm	Protection Level - IP	IP65	Power Switchable	YES
Beam Angle	60°, 90°, 110° Adjustable	Dimensions	300x167mm	Operating Voltage	100-277V
Type of Distribution	Direct Symmetrical	Type of Installation	Hanging, Ceiling, Wall	Frequency	50-60 Hz
Optical Material	Diffuser PC	Body Frame	Aluminium	Power Factor	>0.9
Life Span	50 000 Hrs	Weight	2.0 kg	CRI	80
		Operation Temperature	-30°C to +45°C	Dimmable	NO

DIMENSIONS

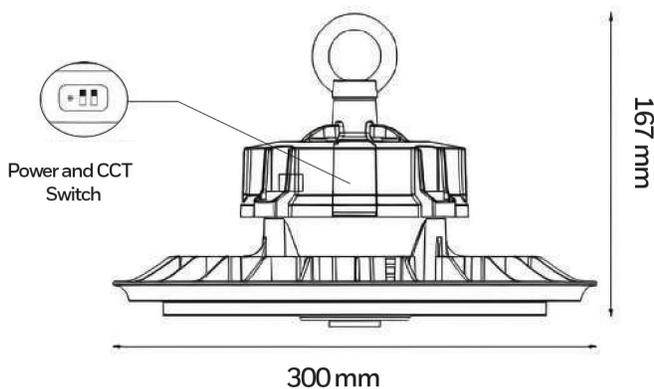



ADDITIONAL INFORMATION

New heat dissipation system to ensure long lifetime




UFO HIGHBAY

HW-UFO-01-200W-PS-CCT


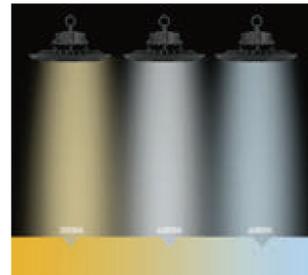
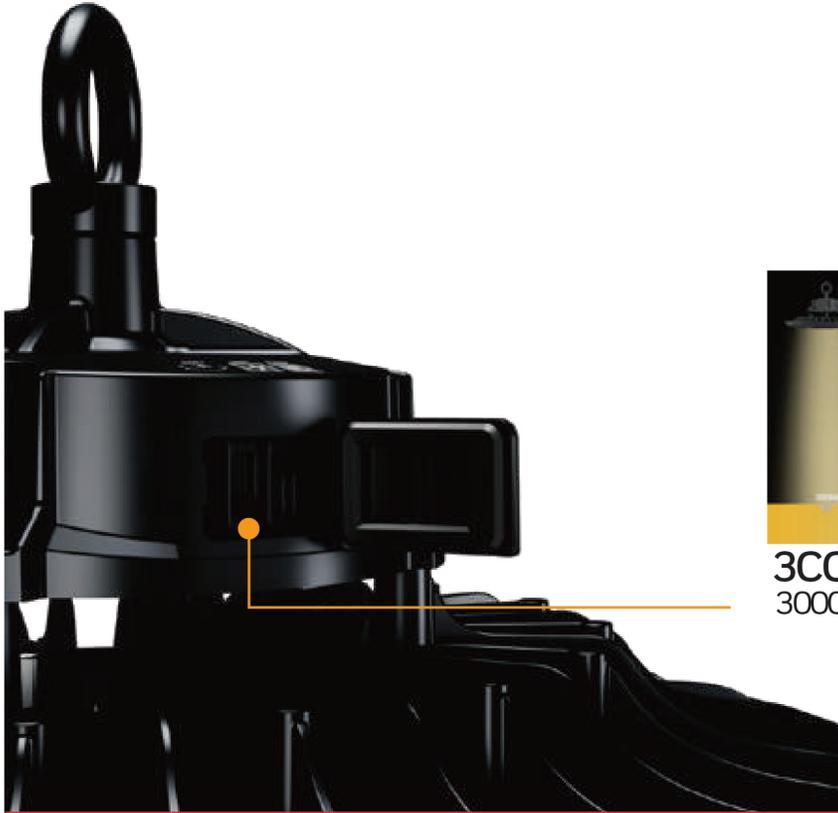


3CCT Selectable
3000K, 4000K, 6000K

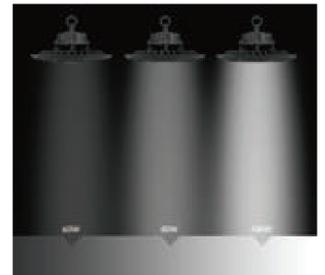

3 Power-in-1
110W/150W/200W
selectable

Rotate the lens to change the beam Angle

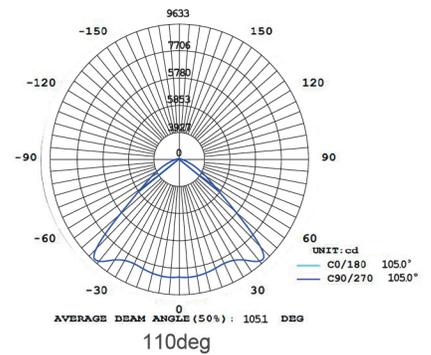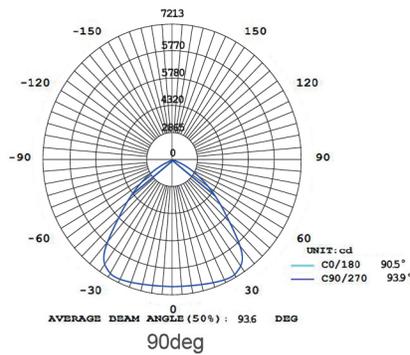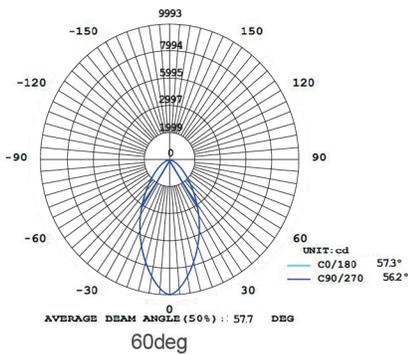

LED FLOOD LIGHT

HW-FL-01-10W



Outdoor

LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. Includes a breather valve that dissipates moisture.

FEATURES

- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- Anti Siphon Cable

APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes



IP 65

LED



Indoor
Outdoor




Save Money




Easy
Installation

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K or 6000K	Finish	Black	Input Power	10W
CCT Switchable	NO	Protection Level - IP	IP65	Operating Voltage	100-277 V
Luminous Flux	930 Lm	Dimensions (LxWxH)	90x28x65mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Wall or Ceiling Mount	Power Rating	>0.90
Beam Angle	120°	Body Frame	Aluminium	CRI	80
Efficiency	117 Lm / W	Optical Material	Glass	Dimmable	NO
		Operation Temperature	-20°C to +40°C		

DIMENSIONS

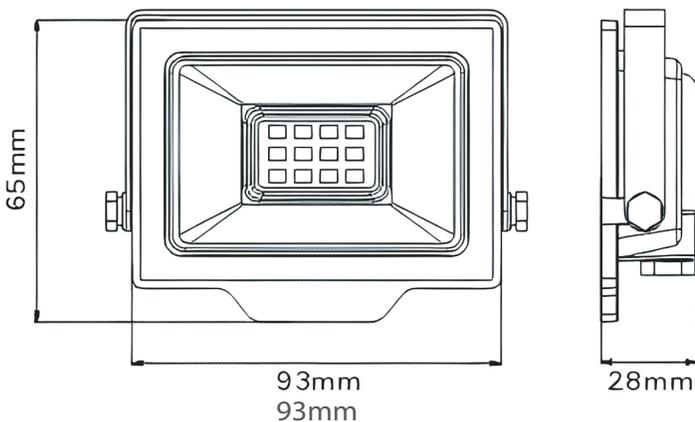

LUMINOUS INTENSITY DISTRIBUTION

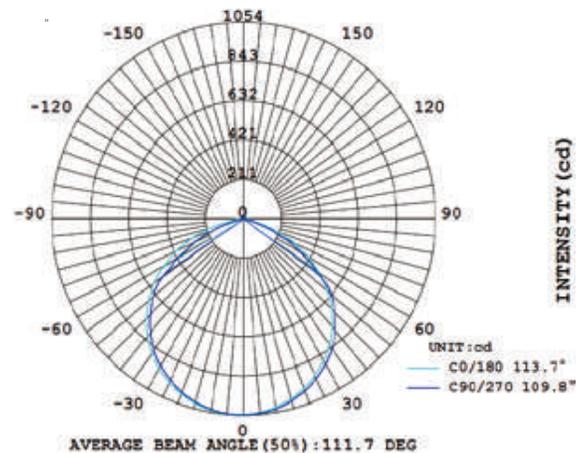

LED FLOOD LIGHT

HW-FL-01-30W-CCT



Outdoor

LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. Includes a breather valve that dissipates moisture.

FEATURES

- Energy efficiency
- Long Lifespan
- No UV emissions
- High uniform lighting
- Anti Siphon Cable

APPLICATION



- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes

CE IP65 LED




OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Color Temperature (CCT)	3000K, 4000K, 6000K	Finish	Black	Input Power	30W
CCT Switchable	YES	Protection Level - IP	IP65	Operating Voltage	100-277 V
Luminous Flux	3210 Lm	Dimensions (LxWxH)	140x28x120mm	Frequency	50-60 Hz
Type of Distribution	Direct Symmetrical	Type of Installation	Wall or Ceiling Mount	CRI	80
Beam Angle	120°	Body Frame	Aluminium	Dimmable	NO
		Optical Material	Glass		
		Operation Temperature	-20°C to +40°C		


DIMENSIONS

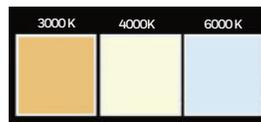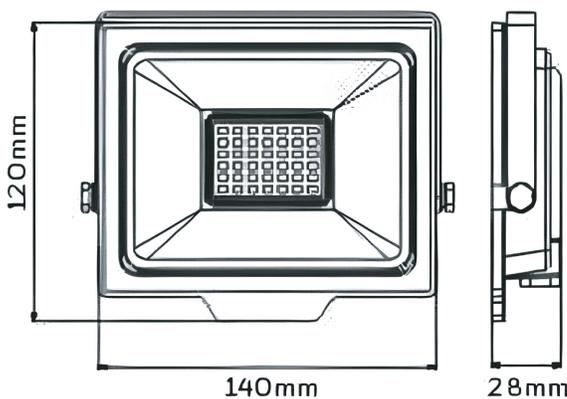

(CCT) Color Temperature Switch



LUMINOUS INTENSITY DISTRIBUTION

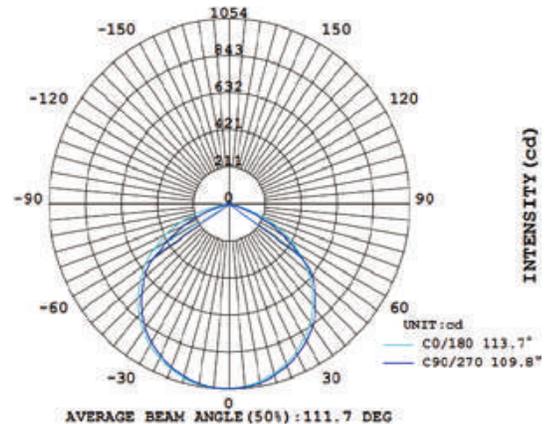

LED FLOOD LIGHT

HW-FL-02-RGB



LED outdoor floodlight luminaire, slim, modern and moisture-resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, installation surface-mounted with metal support. RGB color adjustment providing the color tone you

FEATURES

- Remote control included, RGB type.
- Energy efficiency
- No UV emissions
- Long Lifespan

APPLICATION

- Parks & Squares
- Facades
- Parking Lot
- Airport
- External Perimeter
- High Altitudes

Outdoor

CE IP65 LED



Indoor
Outdoor



Save Money



Easy
Installation

SPECIFICATIONS

Model	Power	CCT	Dimensions (LxWxH)	Remote Control	Use
HW-FL-02-10W-RGB	10W	RGB	110x28x90mm	YES	Indoor / Outdoor
HW-FL-02-50W-RGB	50W	RGB	175x28x140mm	YES	Indoor / Outdoor

OPTICAL DATA

Color Temperature (CCT)	RGB Color
Vented	YES
Type of Distribution	Direct Symmetrical
Beam Angle	120°



PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Glass
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Operating Voltage	100-277 V
Frequency	50-60 Hz
CRI	80
Remote Control Included	YES
Dimmable	NO


DIMENSIONS

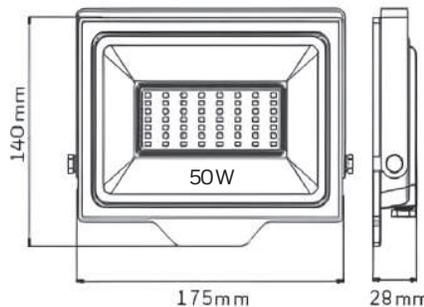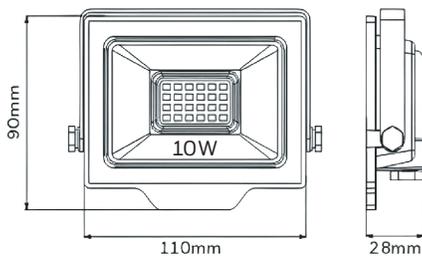

CCT RGB



LUMINOUS INTENSITY DISTRIBUTION

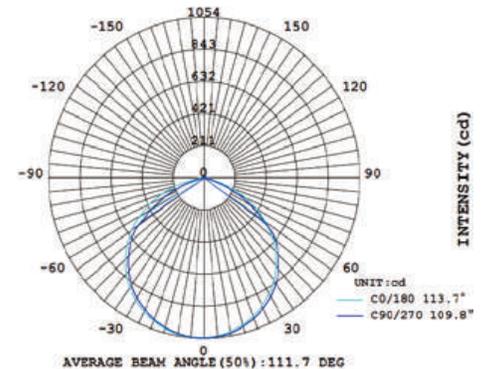

LED FLOOD LIGHT
HW-FL-03-50W-PS-CCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



Multi Wattage Switchable



Multi Color Temperature (CCT)



Indoor Outdoor



Easy Installation

SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-03-50W-PS-CCT	40W / 50W	3000K, 4000K, 6000K	6800 Lm / 7500 Lm	208x140x33mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	110 Lm / W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C


ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

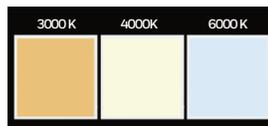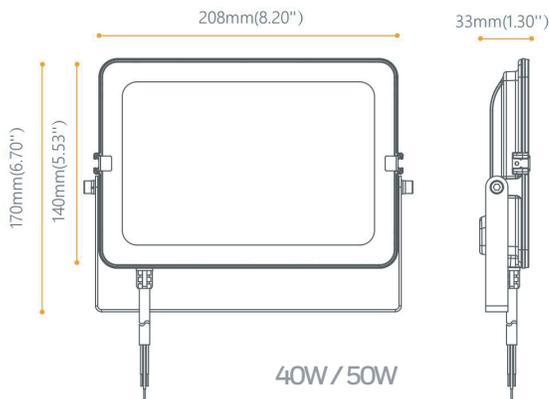


(CCT) Color Temperature Switch



Power Selectable Switch

40W 50W

LUMINOUS INTENSITY DISTRIBUTION

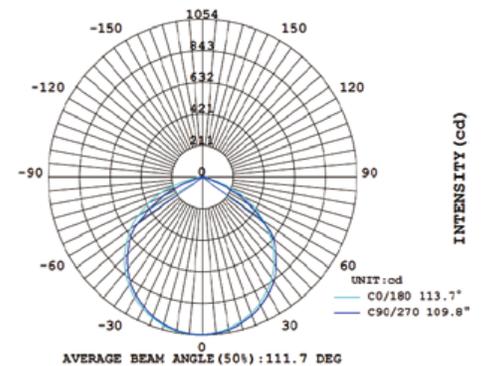

LED FLOOD LIGHT
HW-FL-03-100W-PS-CCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



Multi Wattage Switchable



Multi Color Temperature (CCT)



Indoor Outdoor



Easy Installation

SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-03-100W-PS-CCT	70W / 100W	3000K, 4000K, 6000K	12 700 Lm / 14 000 Lm	266x198x35mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	110 Lm / W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C

ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO


DIMENSIONS

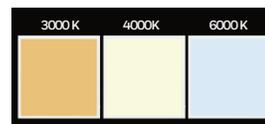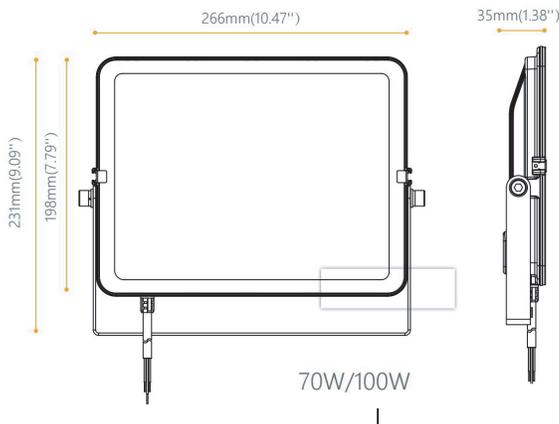


(CCT) Color Temperature Switch



Power Selectable Switch



LUMINOUS INTENSITY DISTRIBUTION

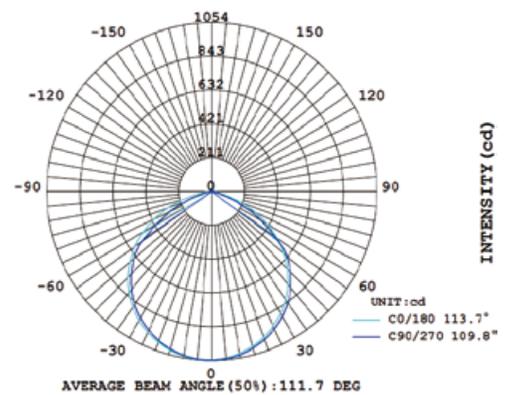

LED FLOOD LIGHT

HW-FL-03-200W-PS-CCT



Outdoor

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 66
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



Multi Wattage Switchable



Multi Color Temperature (CCT)



Indoor
Outdoor



Easy Installation

SPECIFICATIONS

Model	Power Selectable	CCT	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-03-200W-PS-CCT	150W / 200W	3000K, 4000K, 6000K	19125 Lm / 25500Lm	336x266x39mm	Indoor / Outdoor

OPTICAL DATA

CCT Switchable	YES
Type of Distribution	Direct Symmetrical
Beam Angle	110°
Efficiency	127.5Lm / W
Connector	Plastic Injected Connector
Life Span	50 000 Hrs



PHYSICAL DATA

Finish	Black
Protection Level - IP	IP66
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass
Operation Temperature	-20°C to +40°C


ELECTRICAL DATA

Power Selectable	YES
Operating Voltage	120-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO


DIMENSIONS

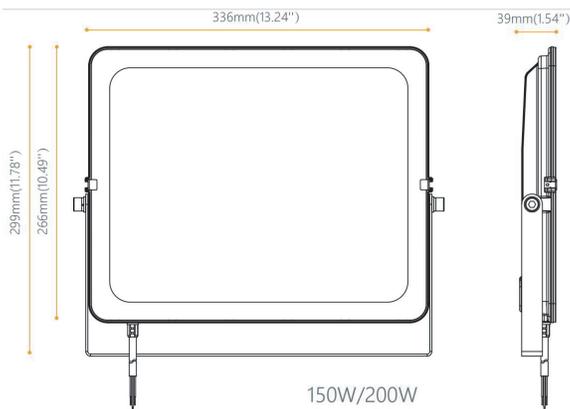


(CCT) Color Temperature Switch



Power Selectable Switch



LUMINOUS INTENSITY DISTRIBUTION

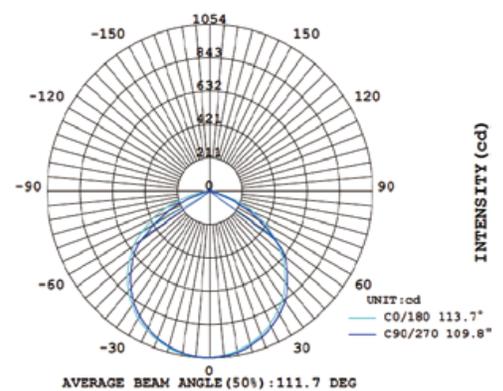

LED FLOOD LIGHT

HW-FL-04-50W



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-04-50W-3K	50W	3000K	50000Lm	175x128x25mm	Indoor / Outdoor
HW-FL-04-50W-6K	50W	6000K	50000Lm	175x128x25mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

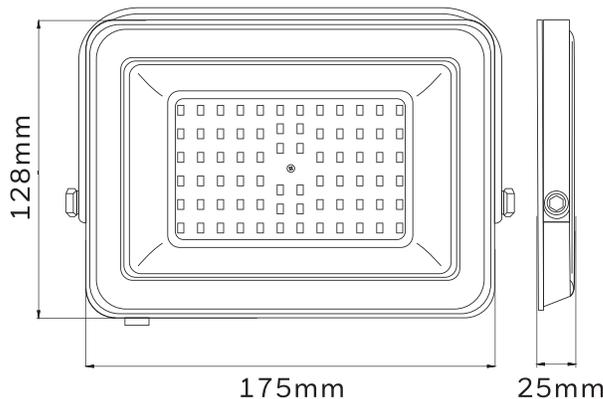

LUMINOUS INTENSITY DISTRIBUTION

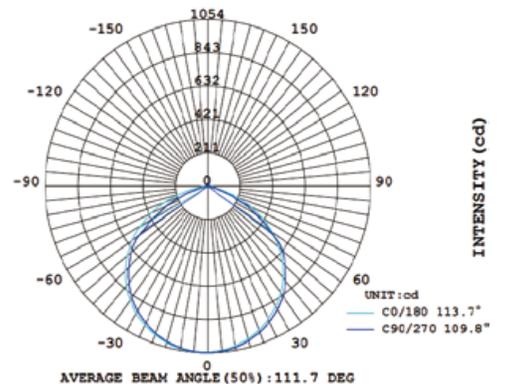

LED FLOOD LIGHT

HW-FL-04-100W



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP 65




SPECIFICATIONS


Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-04-100W-3K	100W	3000K	10000Lm	260x188x25mm	Indoor / Outdoor
HW-FL-04-100W-6K	100W	6000K	10000Lm	260x188x25mm	Indoor / Outdoor

OPTICAL DATA		PHYSICAL DATA		ELECTRICAL DATA	
Type of Distribution	Direct Symmetrical	Finish	Black	Power Selectable	NO
Beam Angle	110°	Protection Level - IP	IP65	Operating Voltage	100-277 V
Connector	Plastic Injected Connector	Type of Installation	Wall or Ceiling Mount	Frequency	50-60 Hz
Life Span	15 000 Hrs	Body Frame	Aluminium	Power Rating	>0.90
		Optical Material	Tempered Glass	CRI	80
				Dimmable	NO

DIMENSIONS

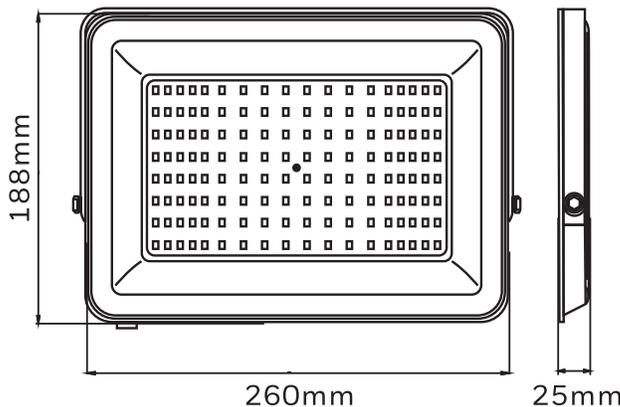


LUMINOUS INTENSITY DISTRIBUTION

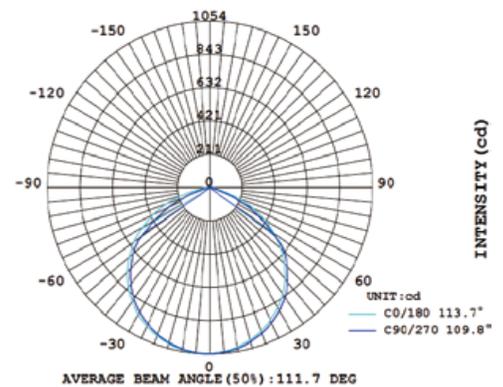

LED FLOOD LIGHT

HW-FL-04-200W-6K

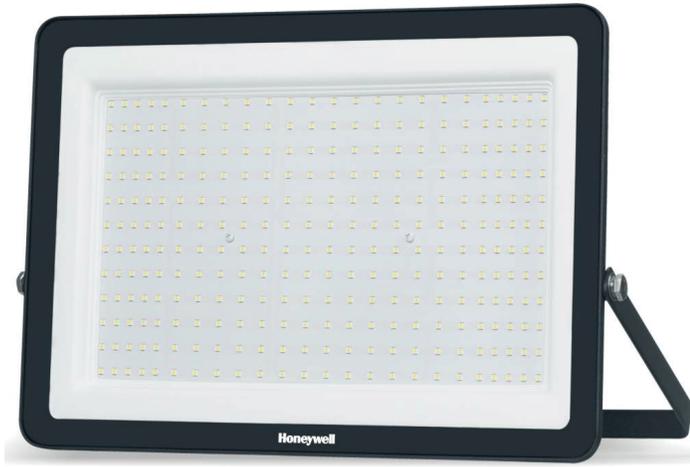

LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP 65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-04-200W-6K	200W	6000K	20000Lm	380x263x25mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

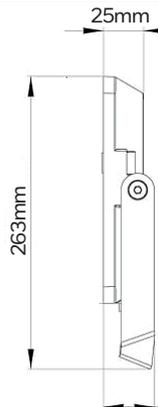

LUMINOUS INTENSITY DISTRIBUTION

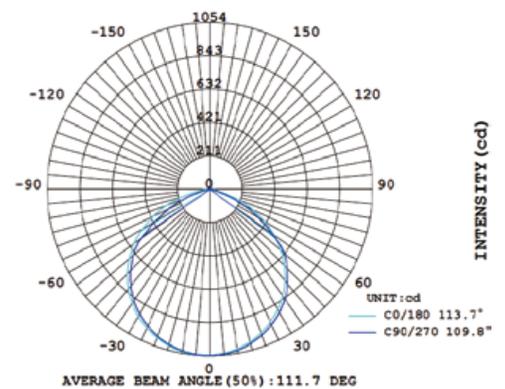

LED FLOOD LIGHT

HW-FL-04-300W-6K



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP 65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-04-300W-6K	300W	6000K	30000Lm	485x315x25mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

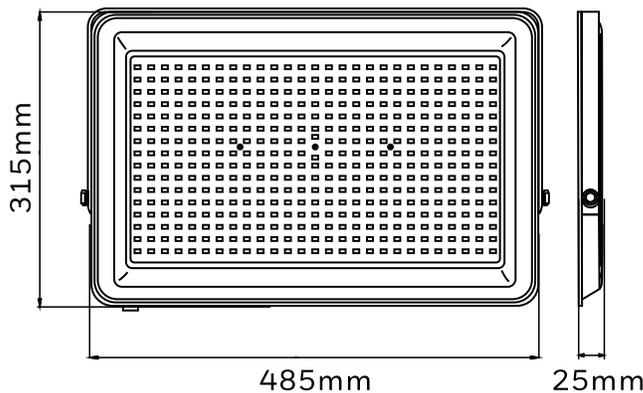

LUMINOUS INTENSITY DISTRIBUTION

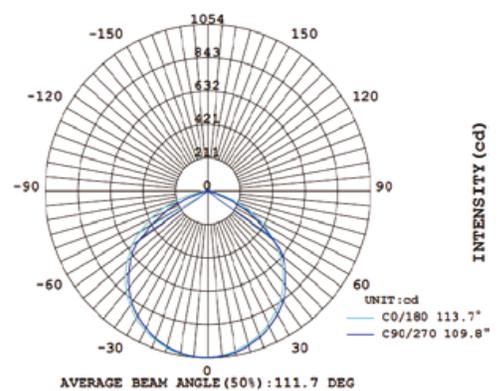

LED FLOOD LIGHT

HW-FL-05-500W-6K



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP 65



SPECIFICATIONS

Model	Power	Light Tone	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-04-500W-6K	500W	6000K	67000Lm	580x460x62mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

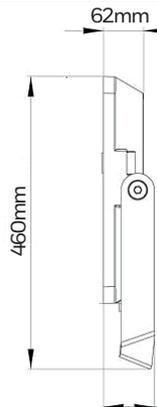

LUMINOUS INTENSITY DISTRIBUTION

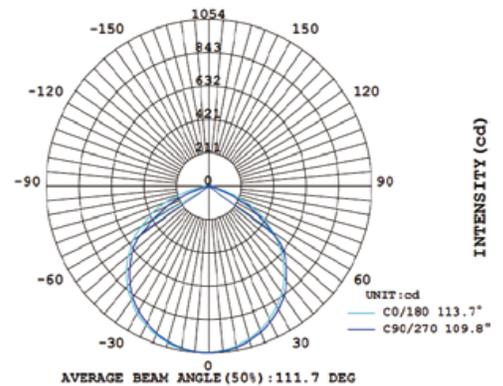

LED FLOOD LIGHT
HW-FL-06-100W-PS-CCT



LED luminaire for outdoor floodlights, slim, modern and resistant design, aluminum chassis, uniform light projection, reduces energy consumption and maintenance costs, surface mounting with metal bracket. The luminaire includes a breather valve that dissipates moisture.

FEATURES

- Powerful and ideal for working at heights
- IP 65
- No UV emissions
- High uniform lighting

APPLICATION

- Residential
- Sidewalks
- Squares
- Airport
- External Perimeter
- High Altitudes



IP 65



SPECIFICATIONS

Model	Power	CCT	Luminous Flux	Dimensions (LxWxH)	Use
HW-FL-06-100W-PS-CCT	100W	3000K/4000K/6500K	11500Lm	260X31X190mm	Indoor / Outdoor

OPTICAL DATA

Type of Distribution	Direct Symmetrical
Beam Angle	110°
Connector	Plastic Injected Connector
Life Span	50 000 Hrs


PHYSICAL DATA

Finish	Black
Protection Level - IP	IP65
Type of Installation	Wall or Ceiling Mount
Body Frame	Aluminium
Optical Material	Tempered Glass


ELECTRICAL DATA

Power Selectable	NO
Operating Voltage	100-277 V
Frequency	50-60 Hz
Power Rating	>0.90
CRI	80
Dimmable	NO

DIMENSIONS

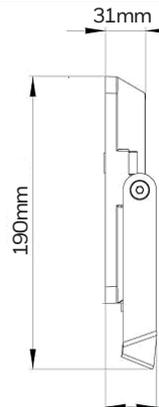

LUMINOUS INTENSITY DISTRIBUTION

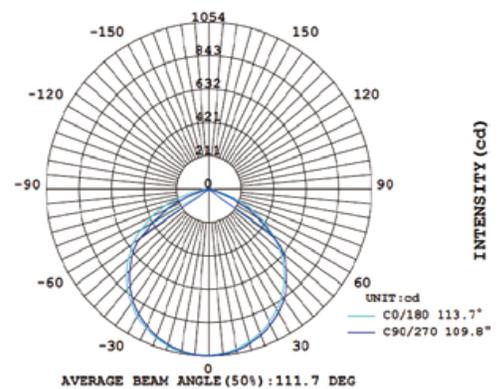



Honeywell

SOLAR LIGHTING 2026

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILLUMINACIONES TÉCNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SOLAR LED OUTDOOR LIGHT

HW-SST-01



Solar LED lighting, unified structure that includes LED luminaire, solar panel, lithium battery. This new solar technology offers a sustainable, with a minimum of investment and maintenance by not requiring electrical point or be connected to the network.

FEATURES

- Heavy Duty ABS + PC, Anti-UV, 94VO Fire-Proof
- Includes remote control allowing to set working modes, time and sensor settings
- Save Energy
- Longlife Span

APPLICATION

- Residential
- Park
- Square
- Parking Lot
- Public or Private roads
- And other places lighting.

Outdoor



Solar Panel



PIR Sensors



Water Proof



Save Money



Life Span
50,000 H

SPECIFICATIONS

Model	Power	Lumen	Solar Panel	Charging Time	Battery Power
HW-SST-01-30W-6K	30 W	162 Lm/W	7W / 6V	12 Hrs	12 000 mAh
HW-SST-01-60W-6K	60 W	162 Lm/W	9W / 6V	12 Hrs	18 000 mAh
HW-SST-01-90W-6K	90 W	162 Lm/W	12W / 9V	12 Hrs	24 000 mAh
HW-SST-01-150W-6K	150 W	162 Lm/W	22W / 9V	10 Hrs	36 000 mAh

OPTICAL DATA

Color Temperature (CCT)	6000 K
Beam Angle	55°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H

PHYSICAL DATA



Finish	Black
Protection Level - IP	IP65
Body Frame	ABS + PC
Optical Material	Diffuser PC
Operation Temperature	-20°C to +50°C

ELECTRICAL DATA


Control Remote Included	YES
Rechargeable battery	LiFePO4
RA	70
Dimmable	NO

DIMENSIONS

Model	Size (LxWxH)
HW-SST-01-30W-6K	385x258x65mm
HW-SST-01-60W-6K	460x258x65mm
HW-SST-01-90W-6K	616x270x65mm
HW-SST-01-150W-6K	778x270x65mm

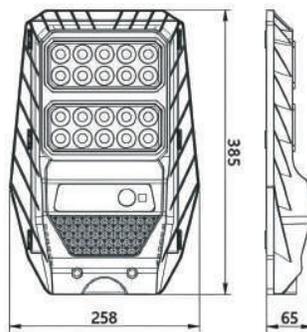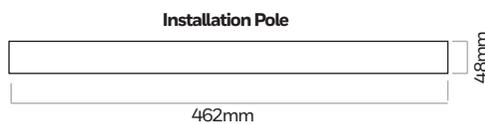


LUMINOUS INTENSITY DISTRIBUTION

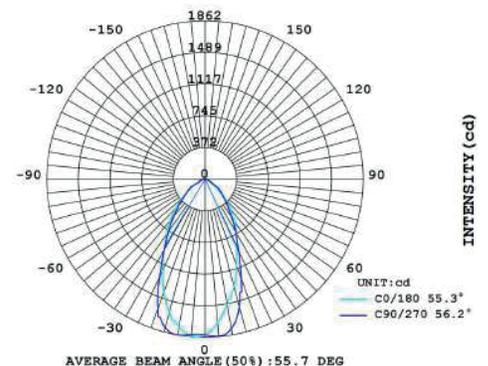


SOLAR LED OUTDOOR LIGHT

HW-SST-01

SPECIFICATIONS		
Model	Rating	Photovoltaic Panel
HW-SST-01-30W-6K	DC3.2V 12AH(32700) 13W	6V 7W Monocrystalline
HW-SST-01-60W-6K	DC3.2V 18AH(32700) 16W	6V 9W Monocrystalline
HW-SST-01-90W-6K	DC6.4V 12AH(32700) 27W	9V 12W Monocrystalline
HW-SST-01-150W-6K	DC6.4V 15AH(32140) 40W	9V 22W Monocrystalline

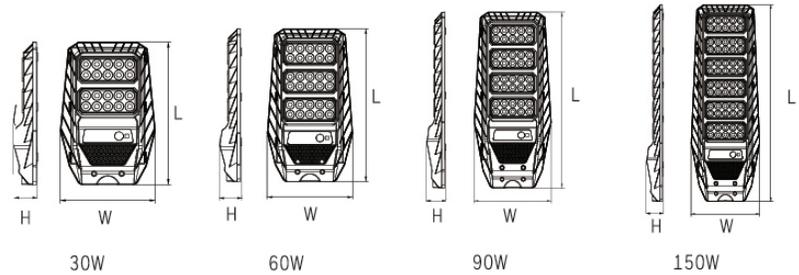


REMOTE CONTROL

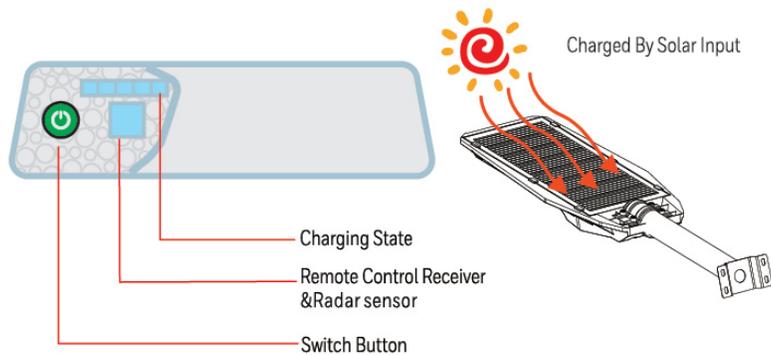


NOTE :
Charge the solar lights outdoor for 6-8 hours under the sunshine before first use.

RED : Battery Charging
GREEN : Battery Full

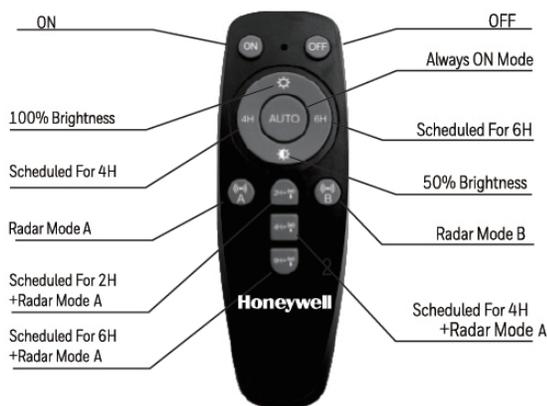


Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

WORKING MODES

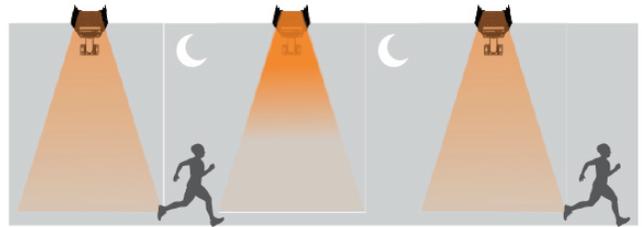

Mode 1: Radar Mode A

The lamp remains off during the daytime. At night, it stays at low brightness when no motion is detected. When motion is detected, the lamp switches to full brightness. Once the person leaves the radar sensor detection range, the lamp remains at full brightness for 15 seconds, then automatically returns to low brightness until dawn, when it turns off.

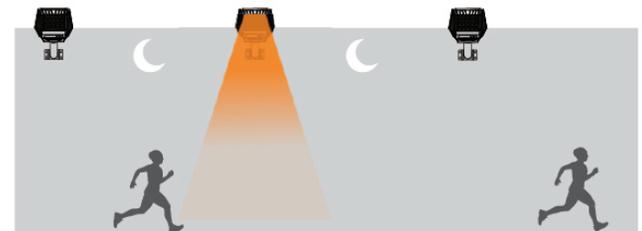

Mode 2: Radar Mode A

The lamp remains off during the daytime and stays off at night when no motion is detected. When motion is detected at night, the lamp switches to full brightness. Once the person leaves the radar sensor detection range, the lamp remains at full brightness for 15 seconds, then automatically turns off until dawn.



Mode 3: Always - On Mode

The lamp remains off during the daytime and stays at full brightness throughout the night. The radar sensor is disabled in this mode at night.

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC600 | 01-2025

LED FLOODLIGHT SOLAR

HW-SFL-01



LED luminaire for street and outdoor lighting, modern and compact design, uniform light projection, high efficiency, long life and easy installation, reduces energy consumption and maintenance costs.

FEATURES

- Heavy Duty Die Cast aluminum housing with ample heat sinking.
- LED fixture whit bracket can adjustable in 0-270 degrees.
- Control Remote Included
- Slipfit Arm included
- IP65/IK08.
Long Lifespan.

APPLICATION

- Park
- Square
- Trails
- Residential buildings
- Parking lot
- Bridges



SPECIFICATIONS

Model	Power	Lumen	Solar Panel	Charging Time	Battery Power
HW-SFL-01-25W-3K	25 W	162 Lm/W	8W / 6V	5 Hrs	6000 mAh
HW-SFL-01-25W-6K	25 W	162 Lm/W	8W / 6V	5 Hrs	6000 mAh
HW-SFL-01-60W-6K	60 W	162 Lm/W	20W / 6V	6Hrs	21 000 mAh
HW-SFL-01-100W-6K	100 W	162 Lm/W	30W / 9V	5Hrs	24 000 mAh
HW-SFL-01-200W-3K	200 W	162 Lm/W	35W / 9V	4 Hrs	30 000 mAh
HW-SFL-01-300W-6K	300 W	162 Lm/W	35W / 9V	5 Hrs	36 000 mAh

OPTICAL DATA

Color Temperature (CCT)	3000K or 6000K
Beam Angle	110°
Type of Distribution	Direct Symmetrical
Life Span	50 000 H

PHYSICAL DATA


Finish	Grey
Protection Level- IP	IP65
Body Frame	Aluminium + ABS
Optical Material	Diffuser PC
Operation Temperature	0°C to +50°C

ELECTRICAL DATA


Control Remote Included	YES
Rechargeable battery	LiFePO4
RA	70
Dimmable	NO

DIMENSIONS

Model	Size (LxWxH)
HW-SFL-01-25W-3K	163x50x185mm
HW-SFL-01-25W-6K	163x50x185mm
HW-SFL-01-60W-6K	204x55x237mm
HW-SFL-01-100W-6K	250x55x290mm
HW-SFL-01-200W-6K	250x55x290mm
HW-SFL-01-300W-6K	250x55x290mm

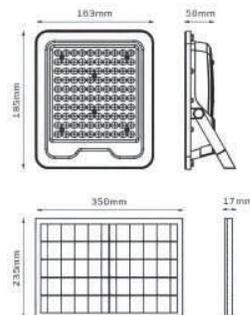

LUMINOUS INTENSITY DISTRIBUTION

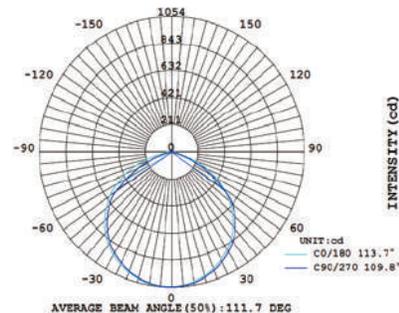



Honeywell

EXTENSION CORDS 2026

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

INDOOR AND OUTDOOR HEAVY DUTY EXTENSION CORD



Indoor / Outdoor

1
OUTLET

25'
FEET

16
GAUGE



Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- They allow you to use tools in the garden or workshops.
- Ideal for landscaping.
- Long lifespan.

Highly Visible

Orange jacket provides extra safety and prevents tripping while working in the yard.

Common Uses

Ideal for landscaping and powering appliances such as a shop vac, weed wacker, bush trimmer, leaf blower and electric lawn mower.

AVAILABLE OPTIONS:

HW-E-01-25FT

HW-E-01-50FT

HW-E-01-100FT

ENERGY INFORMATION

100FT

Max Power:	1625W	1250W
Voltage/Hz:	125V/50-60HZ	
Current:	13A	10A

ADDITIONAL INFORMATION

No. of Outlet Plug:	1
Finish:	Orange
Specification:	16 GAUGE / 3-pronged
Certificate	UL
Major Placements:	Copper, Plastic
Size:	25 / 50 / 100 ft

For more information, please visit www.HoneywellLights-fans.com



1 OUTLET EXTENSION CORD

Indoor



1 OUTLET	6' FEET	125 VOLT	
--------------------	-------------------	--------------------	--

Benefits:

- Extend range of outlets.
- Easy to install and move
- Long lifespan

Common Uses

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

AVAILABLE OPTIONS:

HW-E-16

PERFORMANCE PARAMETER

Finish:	Gray
Packing:	Sleeve
Size:	6' ft

ENERGY INFORMATION

Max Power:	1875W
Voltage:	125V
Current:	15A
Frequency:	50-60Hz
Usage:	Indoor
Certificate:	ETL

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com


©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC414 | 01-2025



3 OUTLETS EXTENSION CORD

Indoor

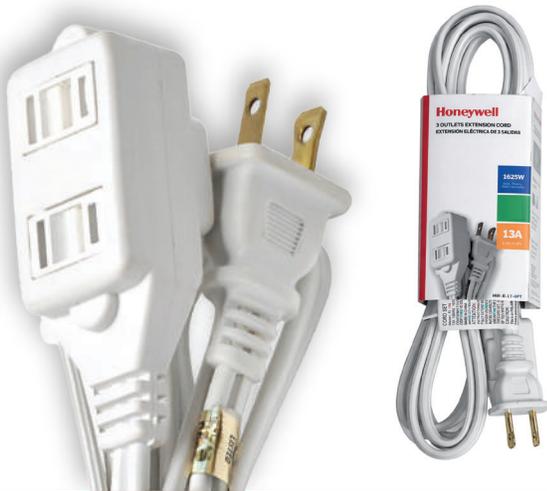

Benefits:

- Extend range of outlets.
- Easy to install and move
- Long lifespan
- Thermoplastic Insulation
- Hard Service Cord

Common Uses

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

AVAILABLE OPTIONS:

HW-E-17-6FT

HW-E-17-9FT

HW-E-17-12FT

PERFORMANCE PARAMETER

Finish: White

Packing: Sleeve

Size: 6' ft

ENERGY INFORMATION

Max Power: 1625W

Voltage: 125V

Current: 13A

Frequency: 60Hz

Usage: Indoor

Certificate: ETL

For more information, please visit www.HoneywellLights-fans.com

4 OUTLET POWER STRIP WITH LIGHTED SWITCH ON/OFF



4 OUTLET	90 JOULES	3' FEET	
--------------------	---------------------	-------------------	--

Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

4 Outlets

This power strip with lighted switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off). Provide 90 joules can protect your equipments.

Common Uses

Built-in circuit breaker for safety. Perfect for home and travel use.

AVAILABLE OPTIONS:

HW-E-09

ENERGY INFORMATION

Max Power:	1875W
Voltage/Hz:	125V
Current:	15A
Surge Protect:	90J

ADDITIONAL INFORMATION

No. of Outlet Plug:	4-outlet
Finish:	White
Specification:	14AWG*3C/SJT/3FT
Certificate	ETL
Major Placements:	Copper, Plastic



For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC407 | 01-2025

6 OUTLET SURGE PROTECTOR POWER STRIP WITH LIGHTED SWITCH ON/OFF

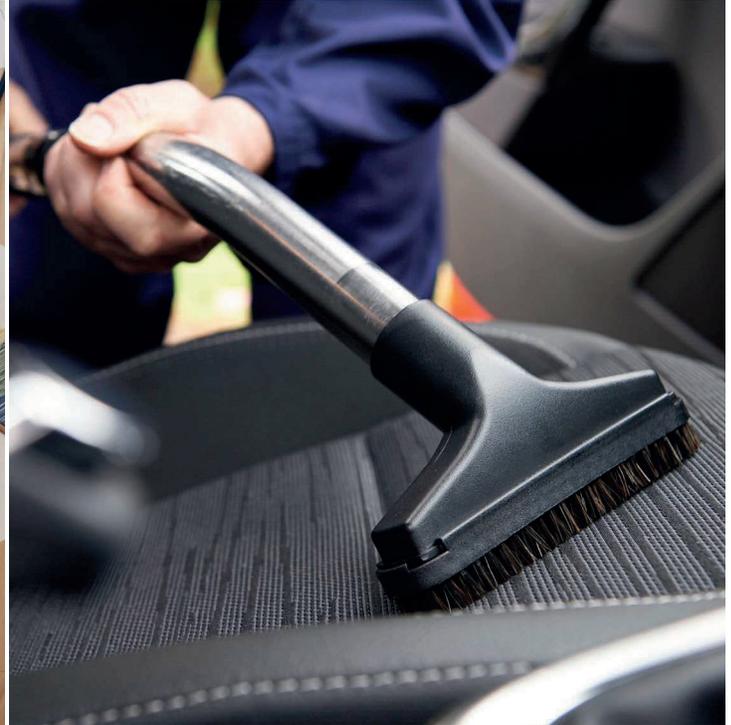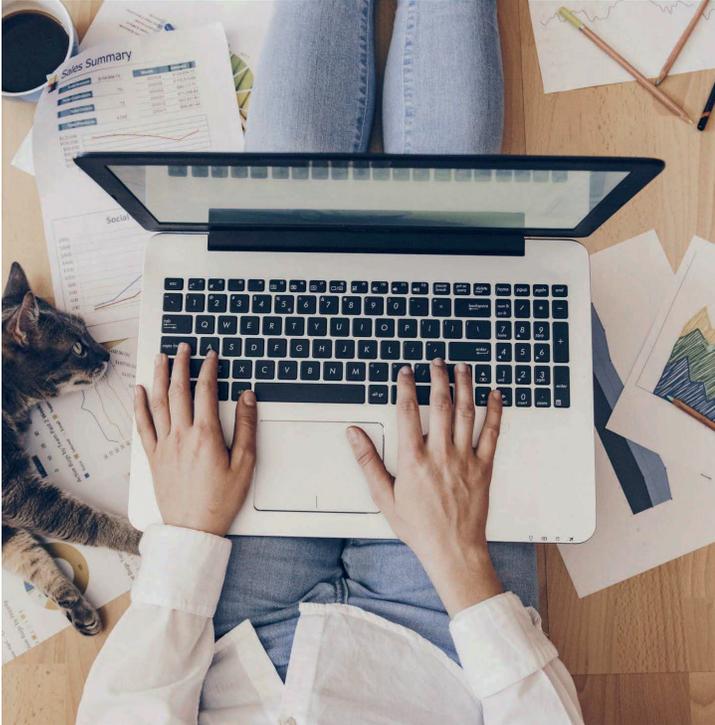

Indoor



6 OUTLET	350 JOULES	14 GAUGE		
--------------------	----------------------	--------------------	--	--

Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple tools in the garage or workbench.
- Long lifespan.

6 Surge Protected Outlets

This power strip provide 350J can protect your equipments. Built-in 15A circuit breaker provides overload protection for safety. Lighted reset switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off).

Common Uses

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

AVAILABLE OPTIONS:

HW-E-05

ENERGY INFORMATION

Max Power: 1875W

Voltage/Hz: 125V/60HZ

Current: 15A

Surge Protect: 350J

ADDITIONAL INFORMATION

No. of Outlet Plug: 6

Finish: White

Specification: 14AWG*3C/SJT/3FT

Certificate: ETL

Major Placements: Copper, Plastic

For more information, please visit www.HoneywellLights-fans.com

3 OUTLET EXTENDER POWER STRIP AND SURGE PROTECTOR



Indoor



3 OUTLET	450 JOULES	3' FEET		
--------------------	----------------------	-------------------	--	--

Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

3 Surge Protected Outlets

With LED indicator and 3 outlets allow you to power your iPhone, Android, laptop, tablet, Nintendo Switch, Fitbit, smartwatch, Bluetooth speaker, TV, sound system or lamps in any space. Provide 450 joules can protect your equipments.

Common Uses

Versatile: Whether you're stuck at the airport and desperately need to charge your devices or need an extra few feet of power to reach the outlet when working remotely at the library or coffee shop.

AVAILABLE OPTIONS:

HW-E-07

ENERGY INFORMATION

Max Power:	1625W
Voltage/Hz:	125V
Current:	13A
Surge Protect:	450J

ADDITIONAL INFORMATION

No. of Outlet Plug:	3-outlet
Finish:	White
Specification:	1.6AWG*3C/ SPT-2
Certificate:	ETL
Size:	3' ft


For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC405 | 01-2025

6 OUTLET POWER STRIP WITH LIGHTED SWITCH ON/OFF

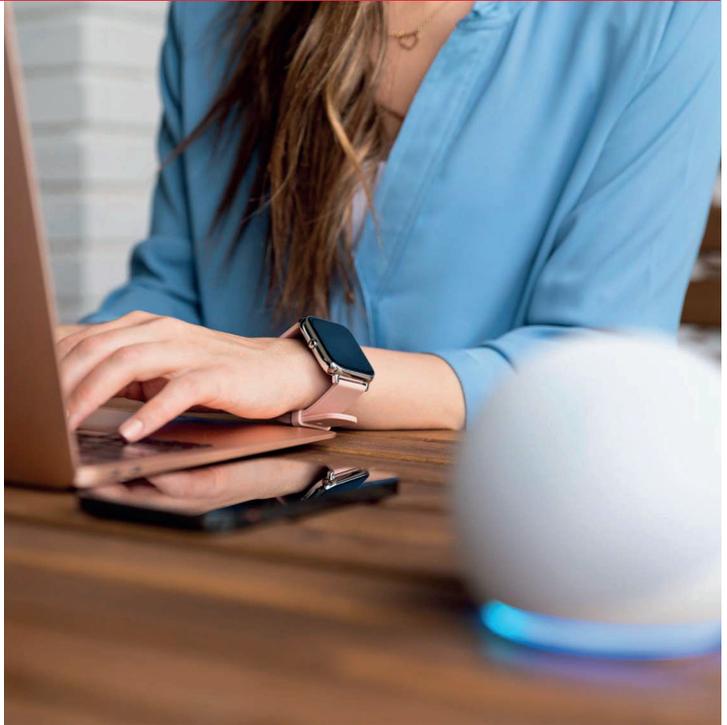

Indoor



6 OUTLET **3'** FEET **cUL** US LISTED

Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

6 Outlets

This power strip with lighted switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off). Built-in circuit breaker provides overload protection for safety.

Common Uses

Perfect for entertainment centers, offices, and anywhere multiple devices need power.

AVAILABLE OPTIONS:

HW-E-12

ENERGY INFORMATION

Max Power:	1875W
Voltage/Hz:	125V
Current:	15A

ADDITIONAL INFORMATION

No. of Outlet Plug:	6-outlet
Finish:	White
Specification:	14AWG*3C/SJT
Certificate:	UL
Size:	3' ft

For more information, please visit www.HoneywellLights-fans.com



6 OUTLETS POWER STRIP

Indoor



6 OUTLET	1875 WATTS	125 VOLT	UL LISTED
--------------------	----------------------	--------------------	---------------------

Benefits:

- Extend range of outlets.
- Easy to install and move
- Long lifespan
- Useful for light to medium duty items
- Allow to operate multiple devices at office or home.

Common Uses

Allow you to power your Phone, Laptop, Tablet, Video Game Console, Smartwatch, Bluetooth Speaker, TV, Sound System or Lamps in any space. With LED indicator.

AVAILABLE OPTIONS:

HW-E-19

PERFORMANCE PARAMETER


Finish: White
Packing: Sleeve

ENERGY INFORMATION

Max Power: 1875W
Voltage: 125V
Current: 15A
Frequency: 50-60Hz
Usage: Indoor
Certificate: UL

For more information, please visit www.HoneywellLights-fans.com

POWER STRIP WITH LIGHTED SWITCH ON/OFF

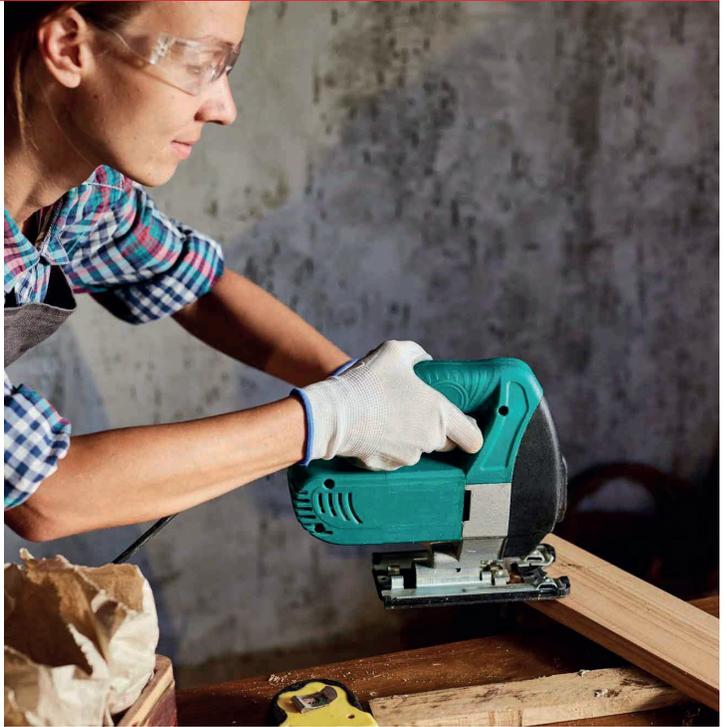

Indoor



Honeywell
POWER STRIP WITH LIGHTED SWITCH ON/OFF

Industrial look and ruggedly designed with 4 compact outlets and 2 wide spacing outlets, with fasteners for horizontal or vertical mounting.

- 1875W Maximum Loading
- 15A 120V 50/60Hz
- 90J Protection



Indoor / Outdoor

6
OUTLET

3'
FEET

14
GAUGE



Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple tools in the garage or workbench.
- Long lifespan.

6 Outlets

Industrial look and ruggedly designed with 4 compact outlets and 2 wide spacing outlets. Cord holder design for wrap the cord, with two horizontal or vertical mounting keyholes.

Common Uses

Bright Yellow/Black metal housing used in garage or shop workbench to operate multiple tools and equipments.

AVAILABLE OPTIONS:

HW-E-06

ENERGY INFORMATION

Max Power:	1875W
Voltage/Hz:	125V/60HZ
Current:	15A
Surge Protect:	90J

ADDITIONAL INFORMATION

No. of Outlet Plug:	6
Finish:	Black + Yellow
Specification:	14AWG*3C/SJT/3FT
Certificate	ETL
Major Placements:	Iron, Plastic

For more information, please visit www.HoneywellLights-fans.com



SURGE PROTECTOR POWER STRIP LIGHTED SWITCH ON/OFF

Outdoor / Indoor



Honeywell
SURGE PROTECTOR POWER STRIP
LIGHTED SWITCH ON/OFF

Industrial look and ruggedly designed with 8 compact outlets and 3 wide spacing outlets.



1875W
Maximum
Loadable

15A
125V
50-60Hz

90J
Surge
Protection

HW-E-14

8
OUTLET

90
JOULES

125
VOLT



Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move
- Long lifespan

Surge Protector Power Strip Lighted Switch ON/OFF:

Industrial look and ruggedly designed whit 8 compact outlets and 3 wide spacing outlets.

Common Uses

Bright Yellow/Black metal housing used in garage or shop workbench to charge and operate multiple tools and equipments at the same time.

AVAILABLE OPTIONS:

HW-E-14

PERFORMANCE PARAMETER

Finish: Yellow/Black
Packing: Box

ENERGY INFORMATION

Max Power: 1875W
Voltage: 125V
Frequency: 50-60Hz
Current: 15A
Surge Protect: 90J
Certificate: ETL

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC412 | 01-2025

HEAVY DUTY SURGE PROTECTOR POWER STRIP WITH LIGHTED SWITCH ON/OFF



Indoor



8 OUTLET	350 JOULES	14 GAUGE		
--------------------	----------------------	--------------------	--	--

Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple tools in the garage or workbench.
- Long lifespan.

8 Surge Protected Outlets

This power strip provide 350J can protect your equipments. Built-in 15A circuit breaker provides overload protection for safety. Lighted reset switch to indicate power ON/OFF at a glance (light on when power is on; light off when power is off).

Common Uses

Perfect for entertainment centers, offices, and anywhere multiple devices need power.

AVAILABLE OPTIONS:

HW-E-11

ENERGY INFORMATION

Max Power:	1875W
Voltage/Hz:	125V
Current:	15A
Surge Protect:	350J

ADDITIONAL INFORMATION

No. of Outlet Plug:	8-outlet
Finish:	White
Specification:	14AWG*3C/SJT/3FT
Certificate:	ETL
Major Placements:	Copper, Plastic

For more information, please visit www.HoneywellLights-fans.com



SURGE PROTECTOR EXTENDER

Indoor



6 OUTLET	1000 JOULES	125 VOLT	
--------------------	-----------------------	--------------------	--

Benefits:

- Extend range of outlets.
- Easy to install and move
- Long lifespan
- Useful for light to medium duty items
- Allow to operate multiple devices at office or home.

Common Uses

Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

AVAILABLE OPTIONS:

HW-E-18

PERFORMANCE PARAMETER


Finish: White
Packing: Box

ENERGY INFORMATION

Max Power: 1875W
Voltage: 125V
Current: 15A
Frequency: 60Hz
Usage: Indoor
Certificate: ETL

For more information, please visit www.HoneywellLights-fans.com

3 OUTLET WALL SURGE PROTECTOR EXTENDER WITH 2 USB PORT

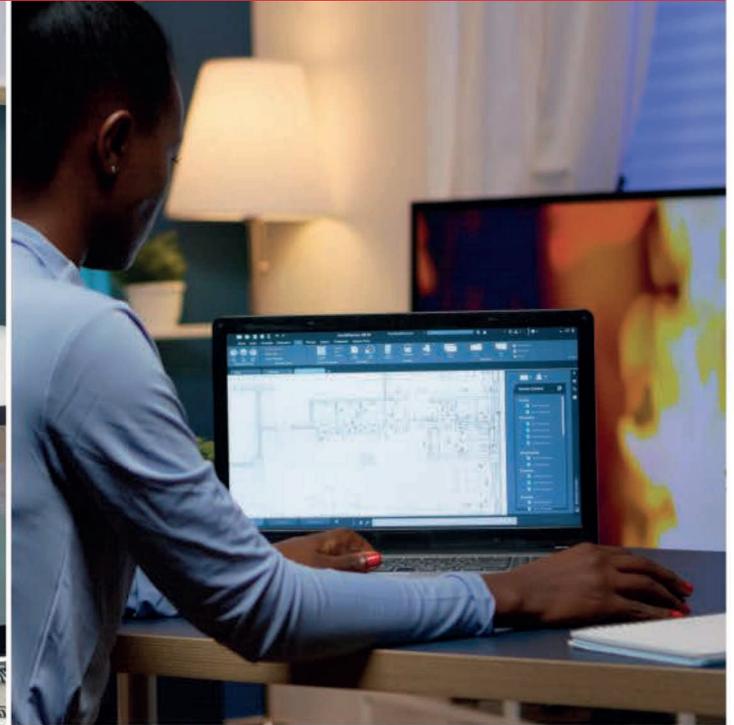

Indoor



Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

3 Surge Protected Outlets

Outlet adapter has 3 outlets and 2USB charging ports share 2.4A that allows you to power your electronics and charge your portable devices all in one place. Provide 300J can protect your equipments.

Multi-functional USB Charging Station

Perfect for keeping smartphones, tablets, and other rechargeable devices at home and travel use.

AVAILABLE OPTIONS:

HW-E-02

ENERGY INFORMATION

Max Power:	1875W
Voltage/Hz:	125V/60HZ
Current:	15A
Surge Protect:	300J

ADDITIONAL INFORMATION

No. of Outlet Plug:	3-outlet
Finish:	White
Specification:	2USB DC5V/2.4A total
Certificate:	UL
Major Placements:	Copper, Plastic

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

6 OUTLET WALL EXTENDER



Indoor



Benefits:

- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move.
- Allow to operate multiple devices at office or home.
- Long lifespan.

Space Saving

Expanding your outlet can be sleek with this slim outlet adapter wall tap to power your devices.

Power More

Turn 2 outlets into 6-Outlet Adapter that can power your home or office electronics

AVAILABLE OPTIONS:

HW-E-04

ENERGY INFORMATION

Max Power: 1875W

Voltage/Hz: 125V/60HZ

Current: 15A

ADDITIONAL INFORMATION

No. of Outlet Plug: 6-outlet

Finish: White

Certificate ETL

Major Placements: Copper, Plastic

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC402 | 01-2025



6 OUTLET WALL EXTENDER

Indoor



Benefits:

- With Plug System
- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move
- Allow to operate multiple devices at office or home.
- Long lifespan

Common Uses

Plugs into Standard Home Outlets.
Is perfect for entertainment centers, offices, and anywhere multiple devices need power.

AVAILABLE OPTIONS:	
HW-E-13	

PERFORMANCE PARAMETER	
Finish:	White
Packing:	Blister

ENERGY INFORMATION	
Max Power:	125V
Frequency:	60Hz
Current:	15A
Usage:	Indoor
Certificate:	ETL

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC411 | 01-2025



WALL EXTENDER WITH MOTION SENSOR

Indoor



Benefits:

- With Motion Sensor
- With Night Light
- Save Energy
- Extend range of outlets.
- Useful for light to medium duty items.
- Easy to install and move
- Long lifespan

Common Uses

Allow you power your phone, laptop, tablet, video game console, smartwatch, bluetooth speaker, TV, sound system, or lamps in any space. With night light.

AVAILABLE OPTIONS:

HW-E-15

PERFORMANCE PARAMETER

Finish: White
Packing: Blister

ENERGY INFORMATION

Max Power: 1875W
Voltage: 125V-15A
Frequency: 50-60Hz
Usage: Indoor
Certificate: ETL

For more information, please visit www.HoneywellLights-fans.com



Honeywell

SURGE & VOLTAGE PROTECTORS 2026

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILLUMINACIONES TÉCNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.



VOLTAGE PROTECTOR

120
VOLT

140
JOULES

PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.
- Delay time is 30s.

Common Uses

A/A up to 18,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



LED Indicator / Indicador LED

- Normal Voltage / Voltaje Normal
- Time Delay / Ciclo de Espera
- Overvoltage Indicator / Indicador de Sobre Voltaje
- Undervoltage Indicator / Indicador de Bajo Voltaje

AVAILABLE OPTIONS:

HW-SP-10

PERFORMANCE PARAMETER

Finish:	Black
Packing:	Blister
Delay Time:	30s

ENERGY INFORMATION

Voltage:	120V
Frequency:	50/60Hz
Current:	15A
Surge Protection:	140J
Max Loading:	1800W
Under voltage:	90V
Over voltage:	140V

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC504 | 01-2025



VOLTAGE PROTECTOR

120
VOLT

140
JOULES

PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

Common Uses

Refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers.

A/C up to 12,000BTU (10Amp)


A/C up to 18,000BTU (15Amp)



Voltage protector-10A
HW-SP-02



Voltage protector-15A
HW-SP-03

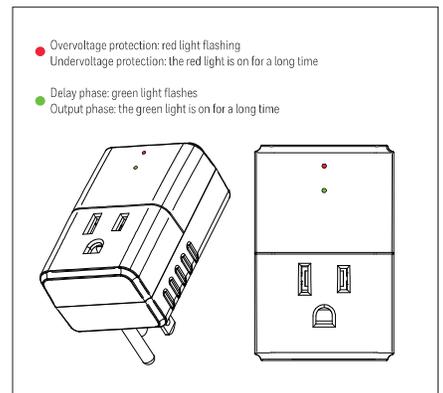

AVAILABLE OPTIONS:

HW-SP-02 ETL Certification

HW-SP-03 CE Certification

PERFORMANCE PARAMETER

Surge Protect: 140J

ENERGY INFORMATION

	HW-SP-02	HW-SP-03
Voltage:	120V	120V
Frequency:	60Hz	50/60Hz
Current:	10A	15A
Delay time:	180s	180s
Under voltage:	90V	90V
Over Voltage:	140V	140V

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: info@HoneywellLights-fans.com

www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC500 | 01-2025



VOLTAGE PROTECTOR



PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

Common Uses


A/C up to 30,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



HW-SP-06



HW-SP-07

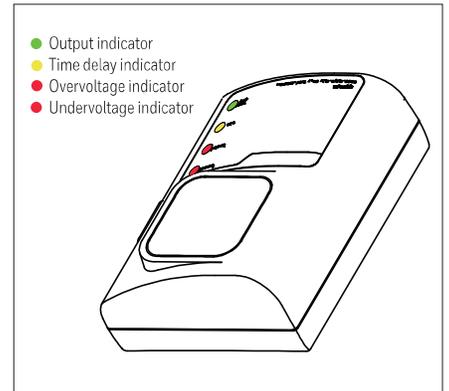

AVAILABLE OPTIONS:

HW-SP-06	ETL Certification
HW-SP-07	CE Certification

PERFORMANCE PARAMETER

Color:	White
--------	-------

ENERGY INFORMATION

	HW-SP-06	HW-SP-07
Voltage:	120V	220V
Frequency:	50/60Hz	50/60Hz
Current:	20A	20A
Delay time:	180s	180s
Under voltage:	90V-105V	170V-197V
Over Voltage:	140V	265V

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC501 | 01-2025



VOLTAGE PROTECTOR



PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

Common Uses


A/A up to 30,000BTU (HW-SP-11), A/A up to 18,000BTU (HW-SP-12), refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



HW-SP-12



HW-SP-11

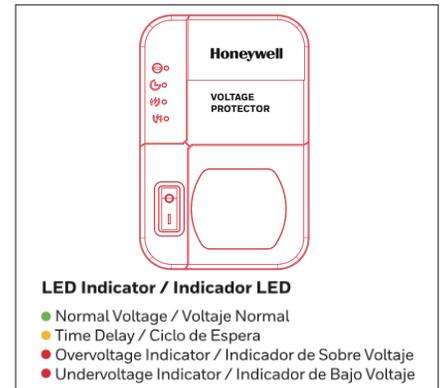

AVAILABLE OPTIONS:

HW-SP-11

HW-SP-12

PERFORMANCE PARAMETER

Finish: White

Packing: Blister

ENERGY INFORMATION

	HW-SP-11	HW-SP-12
Voltage:	220V	120V
Frequency:	50/60Hz	60Hz
Current:	20A	15A
Max Loading:	4400W	1800W
Under voltage:	170-197V	90-105V
Over voltage:	265V	140V

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: info@HoneywellLights-fans.com

www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC505 | 01-2025



VOLTAGE PROTECTOR



PROTECTION FUNCTION


- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

Common Uses


A/A up to 18,000BTU (HW-SP-13), A/A up to 30,000BTU (HW-SP-14), refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



HW-SP-13

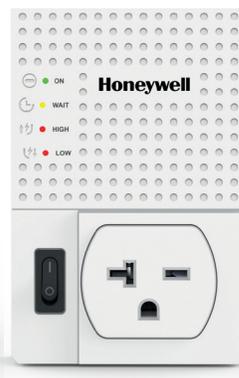

HW-SP-14

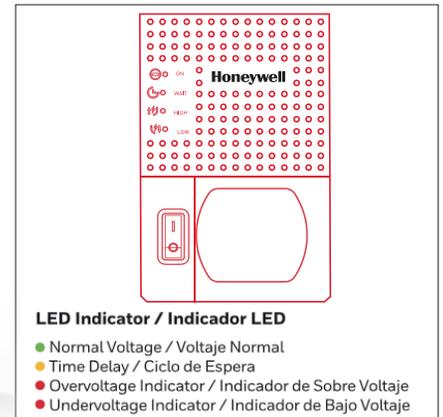

AVAILABLE OPTIONS:

HW-SP-13

HW-SP-14

PERFORMANCE PARAMETER

Finish: White

Packing: Blister

ENERGY INFORMATION

	HW-SP-13	HW-SP-14
Voltage:	120V	220V
Frequency:	60Hz	50/60Hz
Current:	15A	20A
Max Loading:	1800W	4400W
Under voltage:	90-105V	170-197V
Over voltage:	140V	265V

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: info@HoneywellLights-fans.com

www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC506 | 01-2025



VOLTAGE PROTECTOR



PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Flame retardant shell.

Common Uses


A/A up to 18,000BTU (HW-SP-15), A/A up to 30,000BTU (HW-SP-16), refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



HW-SP-15



HW-SP-16

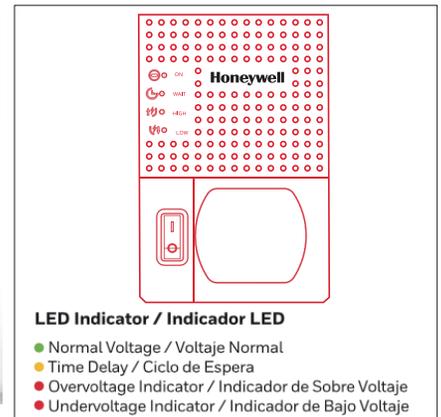

AVAILABLE OPTIONS:

HW-SP-15-120V

HW-SP-16-220V

PERFORMANCE PARAMETER

Finish: Transparent Black

Packing: Blister

ENERGY INFORMATION

	HW-SP-15	HW-SP-16
Voltage:	120V	220V
Frequency:	60Hz	50/60Hz
Current:	15A	20A
Max Loading:	1800W	4400W
Under voltage:	90-105V	170-197V
Over voltage:	140V	265V

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC507 | 01-2025



SURGE PROTECTOR WITH MECHANICAL TIMER


350 JOULES	120 VOLT	 SURGE INDICATOR
----------------------	--------------------	---

PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Lighting Protection.
- Phosphor copper parts.
- Flame retardant shell.

Common Uses

Refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.

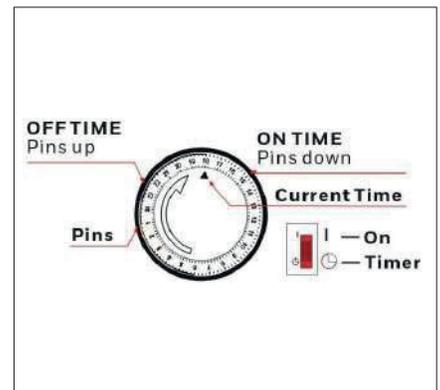

AVAILABLE OPTIONS:

HW-SP-08

PERFORMANCE PARAMETER

Finish: White
Packing: Blister

ENERGY INFORMATION

Voltage:	120V
Frequency:	50/60Hz
Current:	15A
Max Loading:	1800W
Surge Protect:	350J
Time Setting:	24 Hours

For more information, please visit www.HoneywellLights-fans.com



VOLTAGE PROTECTOR




PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

Common Uses

A/A up to 60,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.

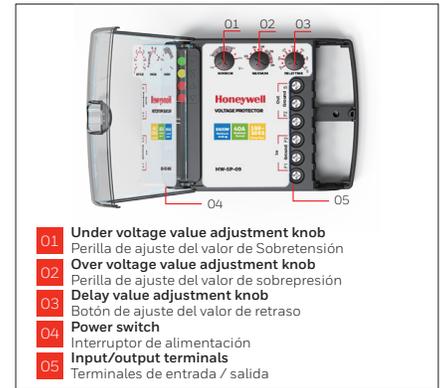

AVAILABLE OPTIONS:

HW-SP-09

PERFORMANCE PARAMETER

Finish: White
Packing: Blister

ENERGY INFORMATION

Voltage: 220V
Frequency: 45/85Hz
Current: 40A
Max Loading: 8800W
Under voltage: 170V-210V
Over voltage: 220V-260V

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2024 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC102 | 02-2024



Honeywell

CEILING FANS 2026

How to use the fan:
Panama Area Offices: (800) 553-4432
Email: info@honeywell-light-fans.com
www.honeywell-light-fans.com

© 2025 HONEYWELL TECHNOLOGIES S.A. All rights reserved.
The Honeywell trademarks used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Summaclima World S.A.



VERONA

APPLICATION:

- Indoor
- Small Room (up to 10' X 10')

BENEFITS:

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-01-SN	Satin Nickel
HW-F-01-WH	White

SPECIFICATIONS

Watts (High):	42W
Volt:	100-130V
Size:	32"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	AC 153*12MM

ENERGY INFORMATION

Airflow (CFM):	3180
RPM (High):	250

ADDITIONAL INFORMATION

Blades:	Plywood
Installation:	Tri-mount
Down Length:	5" + 10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	ETL

LIGHT SOURCE

Number of Lamps:	1
Light Bulb Usage:	E27 Base (not included) / 40W
Capacitor:	3.5+4+6uF
Control:	3 Speed Pull chain

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC300 | 01-2025



HOOVER

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-02-BK	Black
HW-F-02-WH	White
Also Available in:	Oil Rubbed Bronze, Brushed Nickel

SPECIFICATIONS

Watts (High):	55W
Volt:	100-130V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	AC 153*15 mm

ENERGY INFORMATION

Airflow (CFM) when operated at high speed:	4500
Airflow (CFM):	3105
RPM (High):	175

ADDITIONAL INFORMATION

Blades:	Plywood Blades
Installation:	Tri-Mount
Max Ceiling Angle:	18°
Lead Wire:	20"
Reverse Airflow:	Yes
Certification:	ETL

LIGHT SOURCE

Number of Lamps:	2
Light Bulb Usage:	E27 Base (not included)
Capacitor:	4uF/5uF/6uF
Control:	Pull chain
Switch Housing Cap:	Included

For more information, please visit www.HoneywellLights-fans.com



FULTON

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-03-SN Brushed Nickel

Also Available in: White

SPECIFICATIONS

Watts (High): 54W

Volt: 100-130V

Size: 52"

Motor Finish: Silicon Steel + Copper Wire

Motor Size: AC 153*15mm

ENERGY INFORMATION

Airflow (CFM) when operated at high speed: 4580

Airflow (CFM): 3204

RPM (High): 215

ADDITIONAL INFORMATION

Blades: Plywood

Reverse Airflow: Yes

Installation: Tri-Mount

Down Rod: 5" + 10"

Max Ceiling Angle: 18°

Certification: ETL

LIGHT SOURCE

Light Usage: LED

Wattage: 15W

Control: 3 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS SA. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas SA.

SPEC302 | 01-2025



CALERA

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-05-BNW Brushed Nickel

SPECIFICATIONS

Watts (High): 56W
 Volt: 100-130V
 Size: 52"
 Motor: Silicon Steel + Copper Wire
 Motor Size: AC 153*15MM

ENERGY INFORMATION

Airflow (CFM) when operated at high speed: 4530
 RPM (High): 170

ADDITIONAL INFORMATION

Blades: Plywood
 Installation: Tri-mount
 Down Rod: 5"+10"
 Max Ceiling Angle: 16°
 Reverse Airflow: Yes
 Certification: ETL
 Control: 3 Speed Pull Chain

LIGHT SOURCE

Number of Lamps: 2
 Light Bulb Usage: E27 Base (not included)
 Capacitor: 4+5+6uF

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC304 | 01-2025



ELIO

APPLICATION:

- Indoor
- Small Room (up to 10' X 10')

BENEFITS:

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-41-SL	Silver
HW-F-41-BK	Black

SPECIFICATIONS

Watts (High):	28W
Volt:	110-240V
Size:	42"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	153*10mm

ENERGY INFORMATION

Airflow (CFM):	4688
RPM (High):	288

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Tri-Mount
Down Rod:	5" + 10"
Max Ceiling Angle:	16°
Certification:	CE, ETL
Control:	6 Speed Remote Control

LIGHT SOURCE

Source:	LED 20W
CCT switchable:	3000K/4000K/6500K

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC306 | 01-2025



CULLMAN

IP20

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-47-SN-SN

HW-F-47-SN-LW

SPECIFICATIONS

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*12mm

ENERGY INFORMATION

Airflow (CFM):	7300
RPM (High):	230

ADDITIONAL INFORMATION

Blades:	ABS Blades
Installation:	Tri-mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	ETL, CE

LIGHT SOURCE

Lamp:	Led 20W
Color temperature:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com



FLORENCE

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-50-DW Dark Wood

SPECIFICATIONS

Watts (High): 41W
 Volt: 110-240V
 Size: 52"
 Motor: Silicon Steel + Copper Wire
 Motor Size: DC 153*12mm

ENERGY INFORMATION

Airflow (CFM): 6500
 RPM (High): 210

ADDITIONAL INFORMATION

Blades: Solid Wood
 Installation: Tri-mount
 Down Length: 5"+10"
 Max Ceiling Angle: 16°
 Reverse Airflow: Yes
 Certification: ETL, CE

LIGHT SOURCE

Source: LED 20W
 Control: 6 Speed Remote Control
 CCT Switchable: 3000K/4000K/6000K

For more information, please visit www.HoneywellLights-fans.com



DULUTH

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-51-SN: Satin Nickel

SPECIFICATIONS

Watts (High): 38W
 Volt: 110-240V
 Size: 52"
 Motor: Silicon Steel + Copper Wire
 Motor Size: DC 153*12mm

ENERGY INFORMATION

Airflow (CFM): 7260
 RPM (High): 200

ADDITIONAL INFORMATION

Blades: Plywood
 Installation: Tri-mount
 Down Rod: 5"+10"
 Max Ceiling Angle: 16°
 Reverse Airflow: Yes
 Certification: ETL, CE

LIGHT SOURCE

Source: LED 20W
 CCT switchable: 3000K/4000K/6000K
 Control: 6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com



OXFORD

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-52-WH	White
HW-F-52-BK	Black

SPECIFICATIONS

Watts (High):	38W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*15mm

ENERGY INFORMATION

Airflow (CFM):	6379
RPM (High):	127

ADDITIONAL INFORMATION

Blades:	ABS Blades
Installation:	Tri-mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	ETL, CE

LIGHT SOURCE

Source:	LED 20W
CCT switchable:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com



BUTLER

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-53-WH White

SPECIFICATIONS

Watts (High): 36W
 Volt: 110-240V
 Size: 52"
 Motor Finish: Silicon Steel + Copper Wire
 Motor Size: DC 153*12mm

ENERGY INFORMATION

Airflow (CFM): 7600
 RPM (High): 225

ADDITIONAL INFORMATION

Blades: ABS
 Installation: Tri-mount
 Down Rod: 5"+10"
 Max Ceiling Angle: 16°
 Reverse Airflow: Yes
 Certification: ETL, CE

LIGHT SOURCE

Lamp: Led 20W CCT
 Color temperature: 3000K/4000K/6000K
 Control: 6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com



PORTLAND

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-70-DW Dark wood

SPECIFICATIONS

Watts (High): 36W

Volt: 110-240V

Size: 52"

Motor Finish: Silicon Steel + Copper Wire

Motor Size: DC 153*10mm

ENERGY INFORMATION

Airflow (CFM): 6695

RPM (High): 170

ADDITIONAL INFORMATION

Blades: Wood

Installation: Standard & Angled

Down Rod: 5"+10"

Max Ceiling Angle: 16°

Reverse Airflow: Yes

Certification: CE

LIGHT SOURCE

Source: LED 18W

CCT switchable: 3000K/4000K/6000K

Control: 6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC314 | 01-2025



ELLE

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



IP20



AVAILABLE OPTIONS:

- HW-F-71-SN-LW Satin Nickel - Light Wood
- HW-F-71-SN-WH Satin Nickel - White

SPECIFICATIONS

- Watts (High): 36W
- Volt: 110-240V
- Size: 52"
- Motor Finish: Silicon Steel + Copper Wire
- Motor Size: DC 153*12mm

ENERGY INFORMATION

- Airflow (CFM): 4500
- RPM (High): 210

ADDITIONAL INFORMATION

- Blades: Plywood
- Installation: Tri-mount
- Down Rod: 5"+10"
- Max Ceiling Angle: 16°
- Reverse Airflow: Yes
- Certification: ETL, CE

LIGHT SOURCE

- Lamp: LED 20W
- Color temperature: Switch 3000K/4000K/6500K
- Control: 6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC315 | 01-2025



LUXOR

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



IP20



AVAILABLE OPTIONS:

HW-F-87-BK Black

SPECIFICATIONS

Watts (High): 33W
 Volt: 110-240V
 Size: 52"
 Motor Finish: Silicon Steel + Copper Wire
 Motor Size: DC 153*12mm

ENERGY INFORMATION

Airflow (CFM): 7200
 RPM (High): 186

ADDITIONAL INFORMATION

Blades: ABS
 Installation: Tri-mount
 Down Rod: 5'+10"
 Max Ceiling Angle: 16°
 Reverse Airflow: Yes
 Certification: ETL, CE

LIGHT SOURCE

Source: LED 20W
 CCT switchable: 3000K/4000K/6000K
 Control: 6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC316 | 01-2025



LUXIA

APPLICATION:

- Indoor
- Large Room (up to 20' X 20')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-104-SL-WH	Silver
HW-F-104-BK-DW	Dark Wood
HW-F-104-BK	Black

SPECIFICATIONS

Watts (High):	40W
Volt:	110-240V
Size:	66"
Motor :	Silicon Steel + Copper Wire
Motor Size:	DC 153*20mm

ENERGY INFORMATION

Airflow (CFM):	6100
RPM (High):	125

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Tri-mount
Down Rod:	5"+10"
Max Ceiling Angle:	12°
Reverse Airflow:	Yes
Certification:	ETL, CE

LIGHT SOURCE

Source:	LED 20W
CCT switchable:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com



UFO

APPLICATION:

- Indoor
- Small Room (up to 10' X 10')

BENEFITS:

- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.
- Internal Rotative Shade.



AVAILABLE OPTIONS:

HW-F-108-LW Light Wood

HW-F-108-DW Dark Wood

HW-F-108-WH White

SPECIFICATIONS

Watts (High): 13W

Volt: 110-240V

Size: 19"

ENERGY INFORMATION

Airflow (CFM): 5900

RPM (High): 1040

ADDITIONAL INFORMATION

Blades: PC

Installation: Ceiling Mount

LIGHT SOURCE

Source: LED 43W

CCT Switchable: 3000K/4000K/6000K

Control: 6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432

Email: info@HoneywellLights-fans.com

www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC318 | 01-2025



DECKER

IP20

APPLICATION:

- Indoor
- Small Room (up to 10' X 10')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



AVAILABLE OPTIONS:

HW-F-110-WH	White
HW-F-110-BK	Black

SPECIFICATIONS

Watts (High):	35W
Volt:	110-240V
Size:	42"
Motor Size:	122*10mm

ENERGY INFORMATION

Airflow (CFM):	5400
RPM (High):	240

ADDITIONAL INFORMATION

Blades:	PC
Installation:	Ceiling + Angled Mount
Down Rod:	5"+10"
Reverse Airflow:	Yes

LIGHT SOURCE

Source:	LED 24W
CCT switchable:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC320 | 01-2025



BIRNEY

APPLICATION:

- Indoor
- Small Room (up to 10' X 10')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

IP20



AVAILABLE OPTIONS:

- HW-F-111-CF Coffee
- HW-F-111-WH-DW White-Dark Wood

SPECIFICATIONS

- Watts (High): 35W
- Volt: 110-240V
- Size: 42"
- Motor Size: 122*10mm

ENERGY INFORMATION

- Airflow (CFM): 5400
- RPM (High): 240

ADDITIONAL INFORMATION

- Blades: PC
- Installation: Ceiling Mount
- Down Rod: 5"+10"
- Max Ceiling Angle: 16°
- Reverse Airflow: Yes

LIGHT SOURCE

- Source: LED 24W
- Control: Remote Control Included
- CCT Switchable: 3000K/4000K/6000K

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC321 | 01-2025



CARNEY

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



AVAILABLE OPTIONS:

HW-F-112-BK	Black
HW-F-112-WH	White
HW-F-112-SN	Satin Nickel

SPECIFICATIONS

Watts (High):	37W
Volt:	110-240V
Size:	52"
Motor Size:	153*15mm

ENERGY INFORMATION

Airflow (CFM):	7300
RPM (High):	175

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Ceiling + Angled Mount
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes

LIGHT SOURCE

Source:	LED 32W
CCT switchable:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC322 | 01-2025



MEMPHIS

APPLICATION:

- Indoor or Outdoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-113-BK	Black
HW-F-113-WH	White

SPECIFICATIONS

Watts (High):	31W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*10mm

ENERGY INFORMATION

Airflow (CFM):	6700
RPM (High):	210

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Standard & Angled
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	CE

LIGHT SOURCE

Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com



ZANE

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-114-BK	Black
HW-F-114-WH	White
HW-F-114-DW	Dark Wood

SPECIFICATIONS

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153*10mm

ENERGY INFORMATION

Airflow (CFM):	6400
RPM (High):	210

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Standard & Angled
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	CE

LIGHT SOURCE


Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC324 | 01-2025

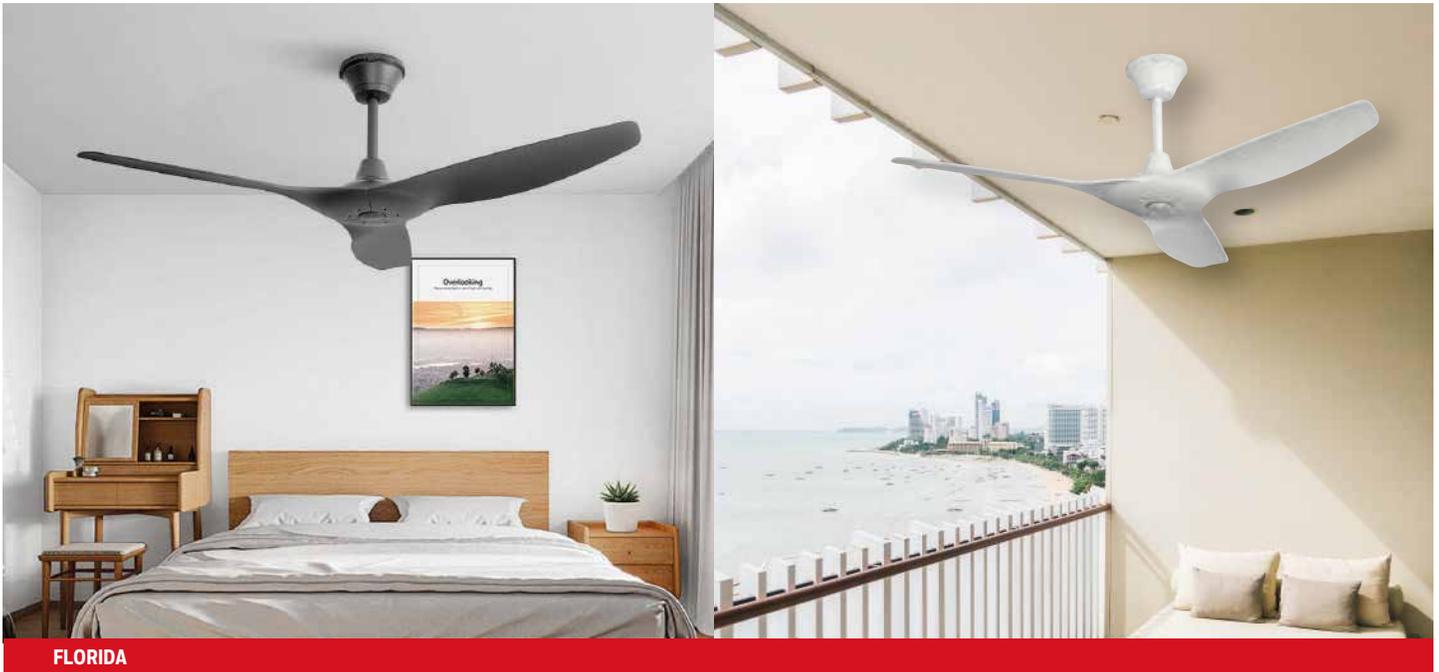

FLORIDA

APPLICATION:

- Indoor or Outdoor
- Large Room (up to 15x15')

BENEFITS:

- Improved environmental performance.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



IP44



AVAILABLE OPTIONS:

HW-F-115-BK	Black
HW-F-115-WH	White

SPECIFICATIONS

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor Finish:	Silicon Steel + Copper Wire
Motor Size:	DC 153x10mm

ENERGY INFORMATION

Airflow (CFM):	6560
RPM (High):	210

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Standard & Angled
Down Rod :	5"+10"
Max Ceiling Angle:	15°
Certification:	CE
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS SA. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC325 | 01-2025



BUFFALO

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-116-DW

SPECIFICATIONS

Watts (High):	36W
Volt:	110-240V
Size:	52"
Motor:	Silicon Steel + Copper Wire
Motor Size:	DC 153*10mm

ENERGY INFORMATION

Airflow (CFM):	6400
RPM (High):	215

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Standard & Angled
Down Rod:	5"+10"
Max Ceiling Angle:	16°
Reverse Airflow:	Yes
Certification:	CE

LIGHT SOURCE

Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com



ONTARIO

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

CERTIFICATE:



AVAILABLE OPTIONS:

HW-F-117-BK Black

SPECIFICATIONS

Watts (High): 51W
 Volt: 110-240V
 Size: 54"
 Motor Finish: Silicon Steel + Copper Wire
 Motor Size: DC 153*16mm

ENERGY INFORMATION

Airflow (CFM): 6500
 RPM (High): 160

ADDITIONAL INFORMATION

Blades: ABS
 Installation: Standard & Angled
 Down Rod: 5"+10"
 Max Ceiling Angle: 16°
 Reverse Airflow: Yes
 Certification: CE

LIGHT SOURCE

Lamp: Led 18W
 Color temperature: 3000K/4000K/6500K
 Control: 6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS SA. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC327 | 01-2025



VEGAS

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.



AVAILABLE OPTIONS:

HW-F-120-BK	Black
HW-F-120-SN	Silver
HW-F-120-CF	Coffee
HW-F-120-WH	White

SPECIFICATIONS

Watts (High):	44W
Volt:	110-240V/50-60Hz
Size:	52"

ENERGY INFORMATION

Airflow (CFM):	6000
RPM (High):	205

ADDITIONAL INFORMATION

Blades:	Plywood
Installation:	Standard & Angled
Reverse Airflow:	Yes
Location:	Indoor

LIGHT SOURCE

Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC328 | 01-2025




VEGAS

APPLICATION:

- Indoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

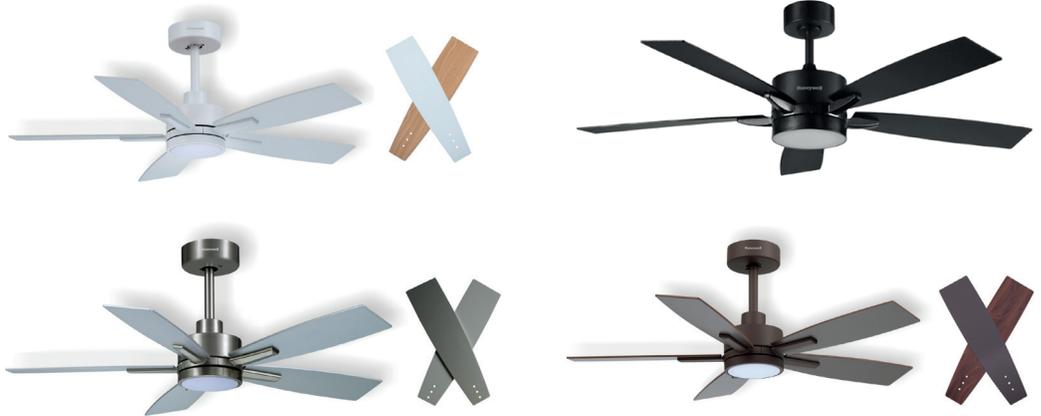

AVAILABLE OPTIONS:

HW-F-121-BK	Black
HW-F-121-SN	Satin Nickel
HW-F-121-CF	Coffee
HW-F-121-WH	White

SPECIFICATIONS

Watts (High):	48W
Volt:	110-240V/50-60Hz DC
Size:	42"
Motor Size:	133*12mm

ENERGY INFORMATION

Airflow (CFM):	4164
RPM (High):	260

ADDITIONAL INFORMATION

Blades:	Plywood
Installation:	Standard & Angled
Reverse Airflow:	Yes
Location:	Indoor
Certification:	CE

LIGHT SOURCE

Lamp:	Led 20W
Color temperature:	3000K/4000K/6000K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC329 | 01-2025



DANVILLE

APPLICATION:

- Indoor & Outdoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

IP44



AVAILABLE OPTIONS:

HW-F-123-BK	Black
HW-F-123-WH	White
HW-F-123-SN	Satin Nickel

SPECIFICATIONS

Watts (High):	56W
Volt:	110-240V/50-60Hz DC
Size:	70"
Motor Size:	133*12mm

ENERGY INFORMATION

Airflow (CFM):	13500
----------------	-------

ADDITIONAL INFORMATION

Blades:	ABS
Installation:	Standard & Angled
Reverse Airflow:	Yes
Location:	Indoor or Outdoor
Certification:	CE

LIGHT SOURCE

Lamp:	Led 30W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC329 | 01-2025



CONCORD

APPLICATION:

- Indoor & Outdoor
- Large Room (up to 15' X 15')

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Long lifespan.

IP44



AVAILABLE OPTIONS:

HW-F-124-BK	Black
HW-F-124-WH	White

SPECIFICATIONS

Watts (High):	56W
Volt:	110-240V/50-60Hz DC
Size:	70"
Motor:	155 DC Motor

ENERGY INFORMATION

Airflow (CFM):	13,458
----------------	--------

ADDITIONAL INFORMATION

Blades:	Aluminium
Installation:	Standard & Angled
Reverse Airflow:	Yes
Location:	Indoor or Outdoor
Certification:	CE

LIGHT SOURCE

Lamp:	Led 18W
Color temperature:	3000K/4000K/6500K
Control:	6 Speed Remote Control

For more information, please visit www.HoneywellLights-fans.com

Illuminaciones Técnicas S.A.
 Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.
 The Honeywell trademark is used under license from Honeywell International Inc.
 Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC329 | 01-2025



Honeywell

SOLAR PANEL 2026


Iluminaciones Técnicas S.A.
Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2026 ILUMINACIONES TÉCNICAS S.A. All rights reserved.
The Honeywell trademark is used under license from Honeywell International Inc.
Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

HW-7N66HC-BF

600W~620W

MONOCRYSTALLINE MODULE

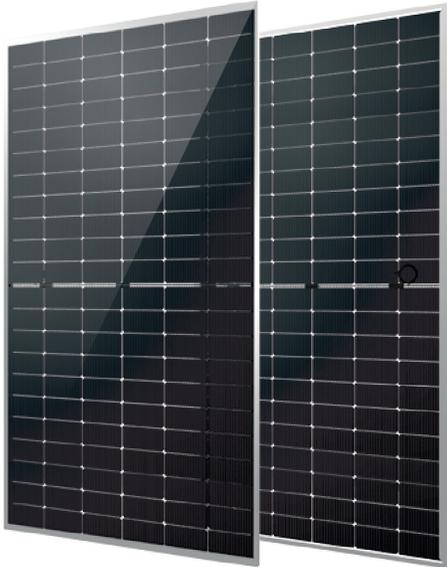

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 620W with module efficiency up to 23.00% by using the most advanced , N-Type TOPCon cell technology.
- Transparent double glass with excellent fire rating, with better temperature coefficient.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.


CERTIFICATIONS

- IEC 61215 (2021), IEC 61730(2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

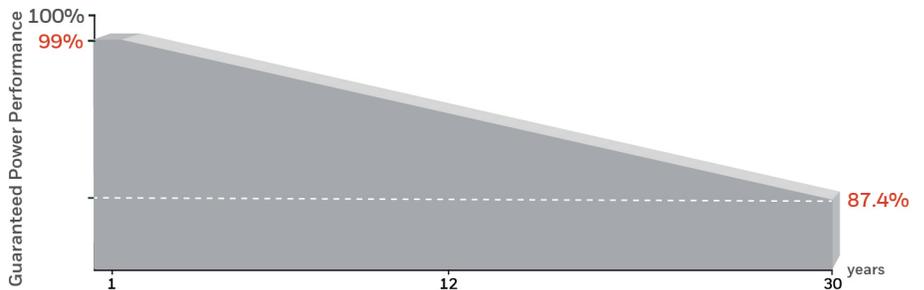

Passionately
committed to
delivering innovative
energy solutions

ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P _{max})	600W	605W	610W	615W	620W
Open Circuit Voltage (V _{oc})	47.70 V	47.90 V	48.10V	48.30V	48.50 V
Short Circuit Current (I _{sc})	15.95 A	16.00 A	16.05 A	16.10 A	16.15 A
Maximum Power Voltage (V _{mp})	39.44 V	39.60 V	39.77 V	39.96 V	40.15 V
Maximum Power Current(I _{mp})	15.21 A	15.28 A	15.34 A	15.39 A	15.45 A
Module Efficiency (%)	22.20 %	22.40 %	22.60 %	22.80 %	23.00 %
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Safety Class	Class A				
Maximum Series Fuse	25 A				

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5; Tolerance of P_{max}: ±3%; Measurement Tolerance: ±3%

ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P _{max})	453.60 W	457.38 W	461.16 W	464.94 W	468.72 W
Open Circuit Voltage (V _{oc})	44.84 V	45.03 V	45.21V	45.40 V	45.58 V
Short Circuit Current (I _{sc})	12.68 A	12.72 A	12.76 A	12.80A	12.84 A
Voltage at Maximum Power (V _{mp})	37.27 V	37.42 V	37.58 V	37.76 V	37.94 V
Current at Maximum Power (I _{mp})	12.17A	12.22 A	12.27 A	12.31 A	12.36A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

Module Type	600M	605M	610M	615M	620M
Maximun Power (Wp)	648W	653W	658W	663W	668.5W
Open Circuit Voltage (Voc)	47.7V	47.9V	48.1V	48.3V	48.5V
Short Circuit Current (Isc)	17.2A	17.26V	17.32A	17.37V	17.42A
Maximun Power Voltage (Vm)	39.44V	39.6V	39.77V	39.96V	40.15V
Maximun Power Current (Im)	16.43A	16.49A	16.55A	16.6A	16.65A

*Bifacial=P_{max,Rear}/Rated P_{max, Front}

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type, Bifacial (182x210mm)
Number of cells	132 (6x11x2)
Module dimensions	2382x1134x30mm
Weight	32.5kg
Front / Back cover	low-iron tempered glass 2.0 / 2.0 mm
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm ² , 300mm in length, length can be customized
Connector	MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P _{max}	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C


PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	180 pcs
Module quantity per 40' container	720 pcs (HQ)

ENGINEERING DRAWINGS

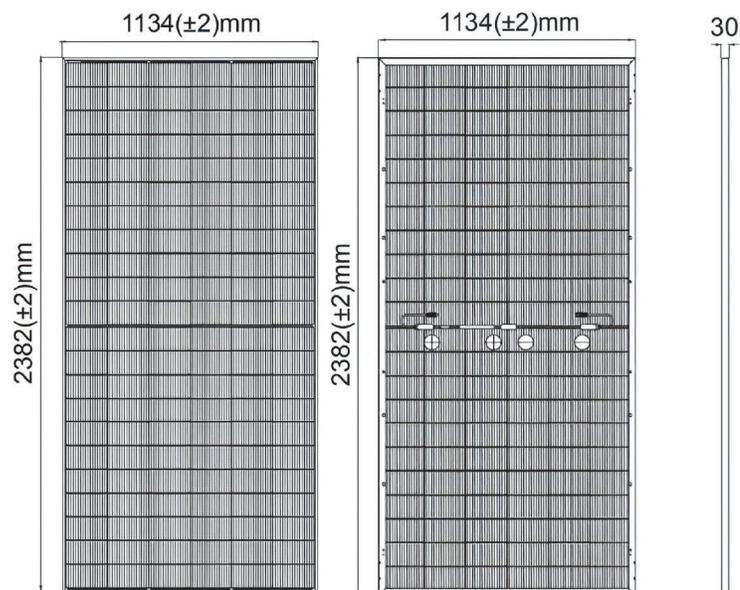


CURRENT-VOLTAGE CURVES

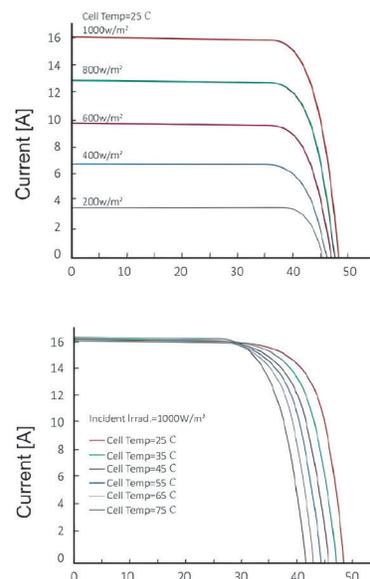

HW-8N66HC-BF

695W~720W

MONOCRYSTALLINE MODULE

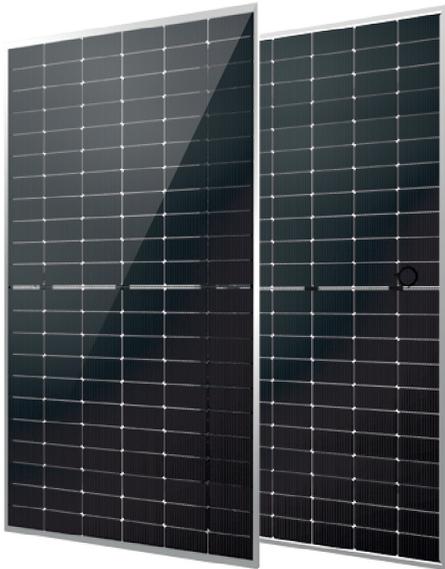

ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 720W with module efficiency up to 23.18% by using the most advanced , N-Type TOPCon cell technology.
- Transparent double glass with excellent fire rating, with better temperature coefficient.
- Lower annual power degradation and higher energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).
- More power gain up to 30% by utilizing the ambient light reflected from surrounding surface.


CERTIFICATIONS

- IEC 61215 (2021), IEC 61730(2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

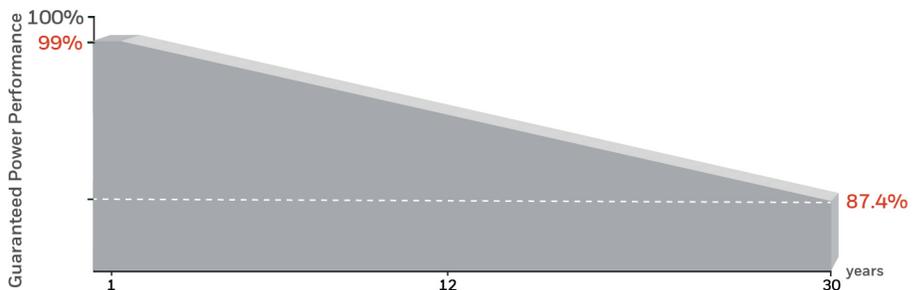

**Passionately
committed to
delivering innovative
energy solutions**

ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P _{max})	695W	700W	705W	710W	715W	720W
Open Circuit Voltage (V _{oc})	48.43 V	48.60 V	48.77 V	48.94 V	49.11 V	49.24 V
Short Circuit Current (I _{sc})	18.30 A	18.35 A	18.40 A	18.45 A	18.50 A	18.55 A
Maximum Power Voltage (V _{mp})	40.18 V	40.35 V	40.52 V	40.69 V	40.86 V	41.03 V
Maximum Power Current (I _{mp})	17.30 A	17.35 A	17.40 A	17.45 A	17.50 A	17.55 A
Module Efficiency (%)	22.37 %	22.53 %	22.70 %	22.86 %	23.02 %	23.18 %
Operating Temperature	-40°C to +85°C					
Maximum System Voltage	1500V DC					
Fire Safety Class	Class A					
Maximum Series Fuse	30A					

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5; Tolerance of P_{max}: ±3%; Measurement Tolerance: ±3%

ELECTRICAL CHARACTERISTICS WITH 10% SOLAR IRRADIATION RATIO

Module Type	695M	700M	705M	710M	715M	720M
Maximum Power (Wp)	750.6W	756W	761.4W	766.8W	772.2W	777.6W
Open Circuit Voltage (V _{oc})	48.43V	48.6V	48.77V	48.94V	49.11V	49.28V
Short Circuit Current (I _{sc})	19.76A	19.82V	19.87A	19.93V	19.98A	20.03A
Maximum Power Voltage (V _m)	40.18V	40.35V	40.52V	40.69V	40.86V	41.03V
Maximum Power Current (I _m)	18.68A	18.74A	18.79A	18.85A	18.90A	18.95A

*Bifacial=P_{max,Rear}/Rated P_{max, Front}

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type , Bifacial (210x105mm)
Number of cells	132 (6x11x2)
Module dimensions	2384x1303x33/35mm
Weight	37.7/38kg
Front / Back cover	low-iron tempered glass 2.0 / 2.0 mm
Frame	Aluminum hollow-chamber frame, anodized aluminum alloy silver
Junction box	IP68, 3 diodes
Cable	4mm ² , 300mm in length, length can be customized
Connector	MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P _{max}	-0.34%/°C
Temperature Coefficients of V _{OC}	-0.25%/°C
Temperature Coefficients of I _{SC}	+0.04%/°C


PACKAGING

Standard packaging	31 pcs/pallet
Module quantity per 40' container (33mm)	594 pcs (HQ)
Module quantity per 40' container (35mm)	558 pcs (HQ)

ENGINEERING DRAWINGS

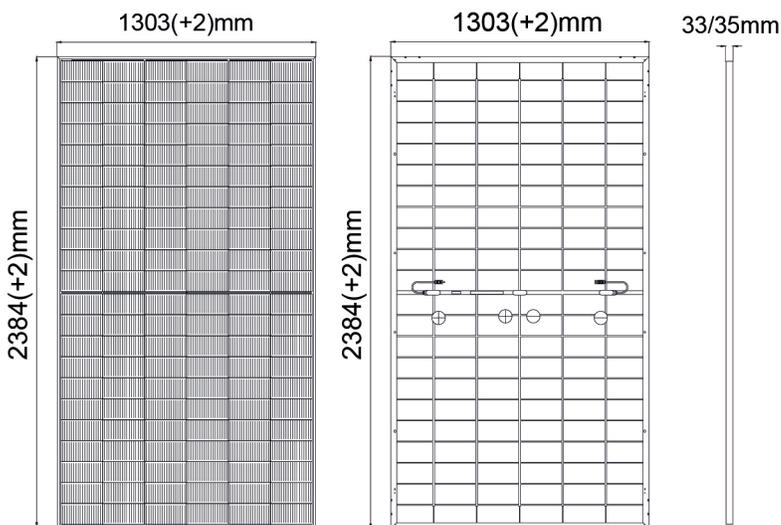

CURRENT-VOLTAGE CURVES

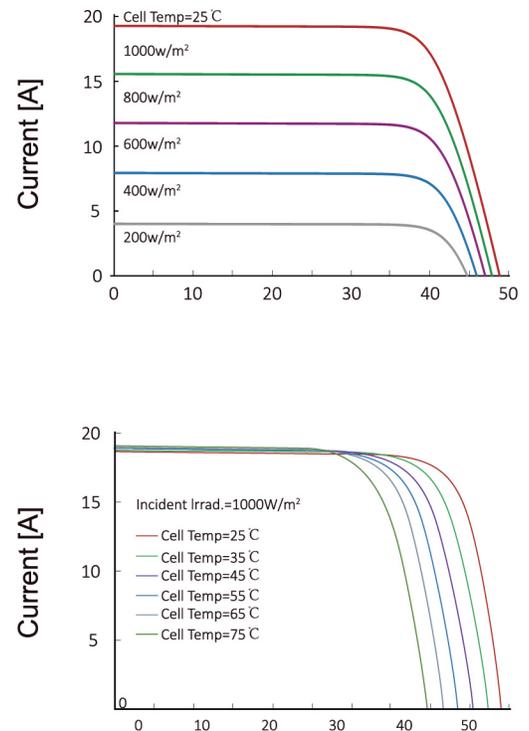

HW-7N54HC-MF-BK

425W~445W

MONOCRYSTALLINE MODULE



ADVANCED PERFORMANCE & PROVEN ADVANTAGES

- High module output up to 445W with module efficiency up to 22.79% by using the most advanced , N-Type TOPCon cell technology.
- Aesthetically appealing design with black back sheet and frame.
- Lower annual power degradation and high energy yield during the module's lifetime.
- Superior performance under high temperature and low light conditions.
- High load-bearing capacity which can withstand wind loads up to 2400Pa and snow loads up to 5400Pa.
- Excellent reliability and durability against extreme environmental conditions (high resistance to salt mist, ammonia, sand, acid and alkali, etc).

CERTIFICATIONS


- IEC 61215 (2021), IEC 61730 (2023), IEC 61701
- IEC 61215-2 (bifaciality): 2021
- ISO 9001:2015: Quality Management System
- ISO 14001:2015: Environment Management System
- ISO 45001:2018: Occupational health and safety management system



SPECIAL WARRANTY

- 20 years product warranty
- 30 years linear power output warranty
- < 1 % First year power degradation
- < 0.4 % Year 2-30 power degradation

Passionately
committed to
delivering innovative
energy solutions

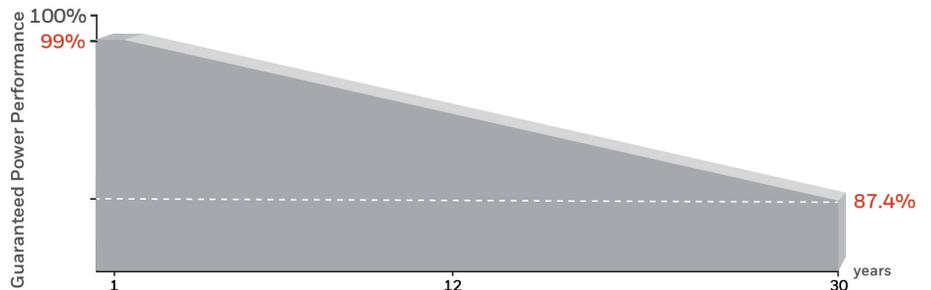

ELECTRICAL CHARACTERISTICS AT STC

Maximum Power (P _{max})	425W	430W	435W	440W	445W
Open Circuit Voltage (V _{oc})	38.20V	38.40V	38.60V	38.75V	38.90V
Short Circuit Current (I _{sc})	13.98 A	14.09 A	14.18 A	14.26 A	14.33A
Maximum Power Voltage (V _{mp})	32.10V	32.27 V	32.42 V	32.60V	32.80 V
Maximum Power Current(I _{mp})	13.24 A	13.33 A	13.42 A	13.50 A	13.57 A
Module Efficiency (%)	21.76 %	22.02 %	22.28 %	22.53 %	22.79 %
Operating Temperature	-40°C to +85°C				
Maximum System Voltage	1500V DC				
Fire Safety Class	Class C				
Maximum Series Fuse	25 A				

STC: Irradiance 1000W/m², Cell temperature 25°C, AM1.5; Tolerance of P_{max}: ±3%; Measurement Tolerance: ±3%

ELECTRICAL CHARACTERISTICS AT NOCT

Maximum Power (P _{max})	319.6 W	323.4 W	327 W	330 W	333 W
Open Circuit Voltage (V _{oc})	36.29V	36.48 V	36.60 V	36.70 V	36.80V
Short Circuit Current (I _{sc})	11.28 A	11.37 A	11.44 A	11.50 A	11.56A
Voltage at Maximum Power (V _{mp})	30.21 V	30.37 V	30.50 V	30.61 V	30.72 V
Current at Maximum Power (I _{mp})	10.58 A	10.65 A	10.72 A	10.78 A	10.84 A

NOCT: Irradiance 800W/m², Ambient temperature 20°C, Wind Speed 1 m/s

MECHANICAL CHARACTERISTICS

Cell type	Monocrystalline Silicon N-type (182x91mm)
Number of cells	108 (6x9x2)
Module dimensions	1722x1134x30mm
Weight	20.5kg
Front cover	low-iron tempered glass / 3.2mm
Backsheet	Black
Frame	Aluminum hollow-chamber frame, nodized aluminum alloy black
Junction box	IP68, 3 diodes
Cable	4mm ² , 300mm in length, length can be customized
Connector	MC4 compatible


TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	45°C±2°C
Temperature Coefficients of P _{max}	-0.30%/°C
Temperature Coefficients of VOC	-0.24%/°C
Temperature Coefficients of ISC	0.043%/°C


PACKAGING

Standard packaging	36 pcs/pallet
Module quantity per 20' container	216 pcs
Module quantity per 40' container	936 pcs (HQ)

ENGINEERING DRAWINGS

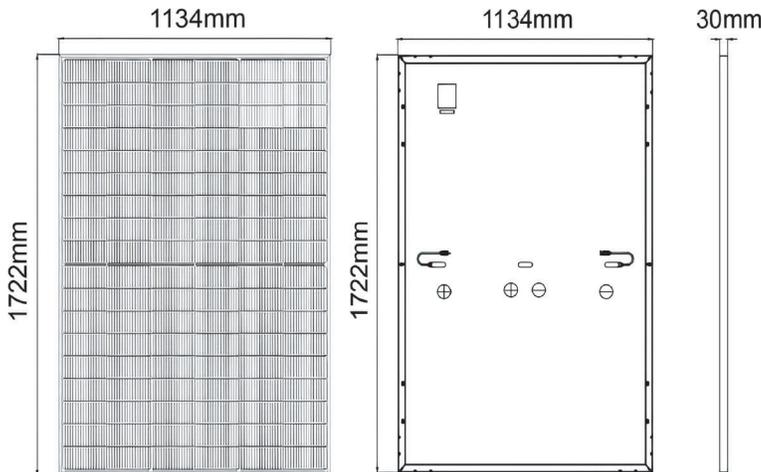

CURRENT-VOLTAGE CURVES

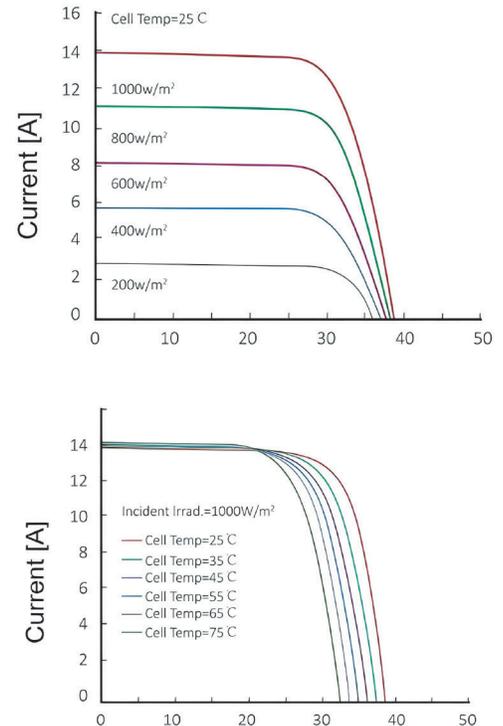



Honeywell

EXHIBITORS 2026

This Honeywell display unit completely enhance and stylize your storefront while offering a wide range of products.

CONTENTS

02
15
42
77
81
98
107
135
152

LED Panels

Pg. 2

LED Bulbs

Pg. 15

Commercial LED Lighting

Pg. 42

Solar Lighting

Pg. 77

Extensions Cords

Pg. 81

Surge Protectors

Pg. 98

Ceiling Fans


Pg. 107

Solar Panels

Pg. 135

Exhibitions

Pg. 152

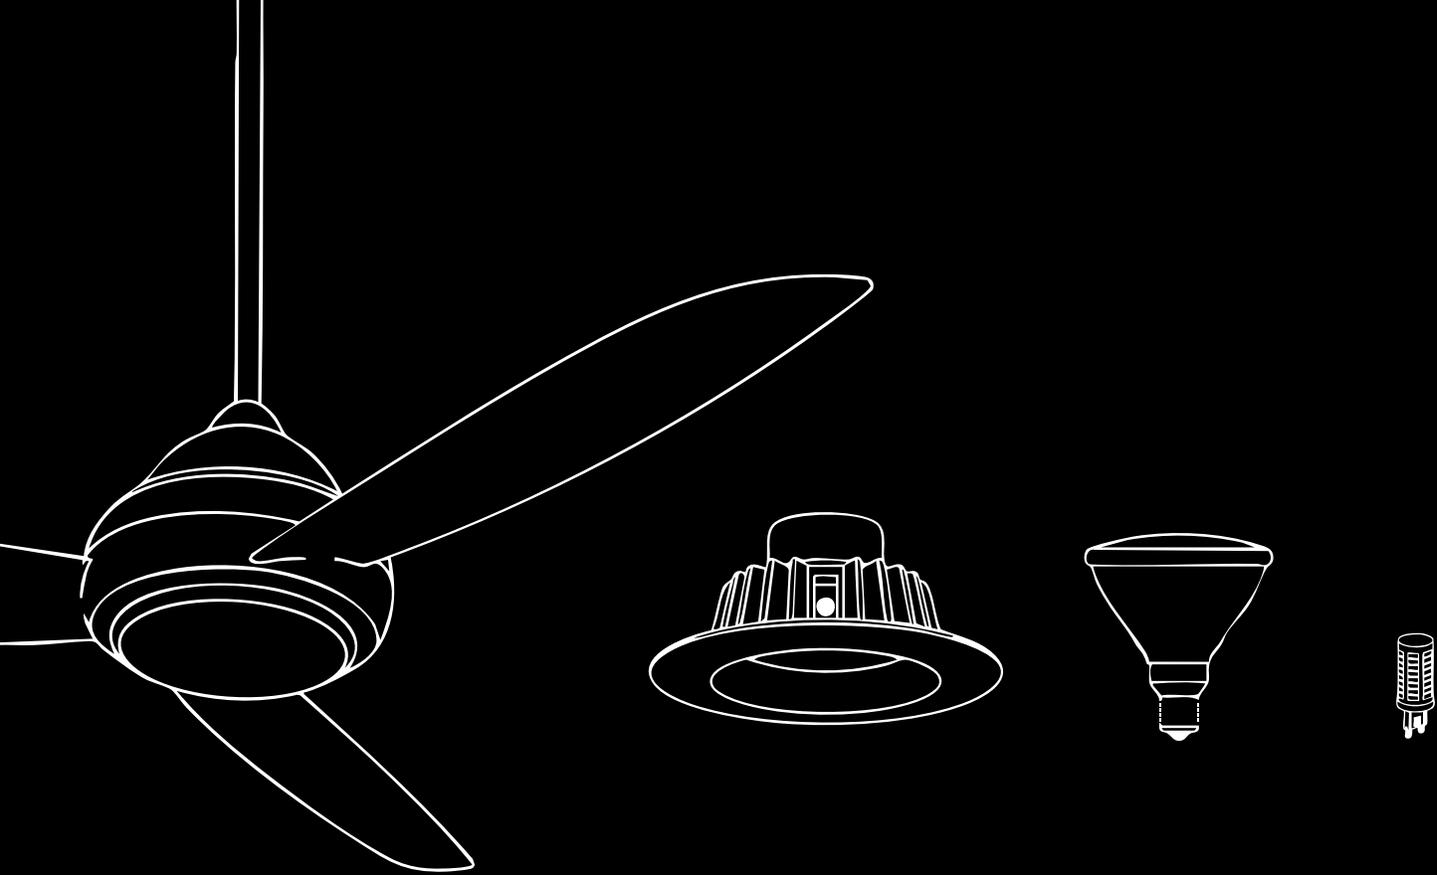

 **ilumitec**[®]
INTERNATIONAL

©2026 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc. Honeywell makes no representations or warranties with respect to this product.

Manufactured by Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432 / Email: info@HoneywellLights-fans.com / www.HoneywellLights-fans.com