



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



### AVAILABLE WATTAGE OPTIONS:


- 5W

### BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

### APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

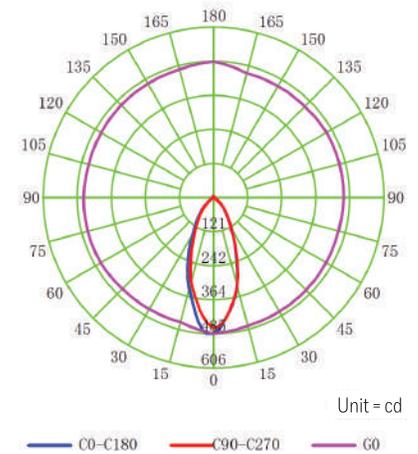

### SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

### ADDITIONAL INFORMATION

Height:	45mm
Length / Width:	90mm x 90mm
Beam Angle:	38° Degree

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-WH-6K
5W	3000K	380 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-3K
5W	6500K	410 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D02-5W-BK-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).

### Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC106 | 01-2025