



LED RECESSED SPOTLIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



AVAILABLE WATTAGE OPTIONS:


- 6.5W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

APPLICATION:

- Decorative applications.
- Retail shops and reception areas.
- Recessed ceiling.
- Indoors.

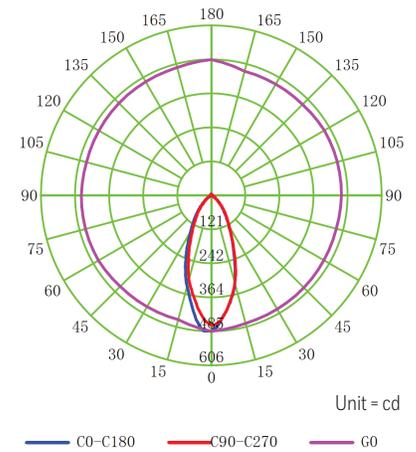

SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Tilttable Angle
Finish:	White and Black Available

ADDITIONAL INFORMATION

Height:	45mm
Length / Width:	90mm x 90mm
Beam Angle:	38° Degree

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Volt	Dimmable / Non Dimmable	Model
6.5W	3000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-WH-3K
6.5W	6500K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-WH-6K
6.5W	3000K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-BK-3K
6.5W	6500K	500 Lm	100-240V / 50-60Hz	Non Dimmable	HW-D04-6.5W-BK-6K

For more information, please visit www.HoneywellLights-fans.com

Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
 Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC105 | 01-2025