



RECESSED LED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 3 W
- 6 W
- 12W
- 18W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

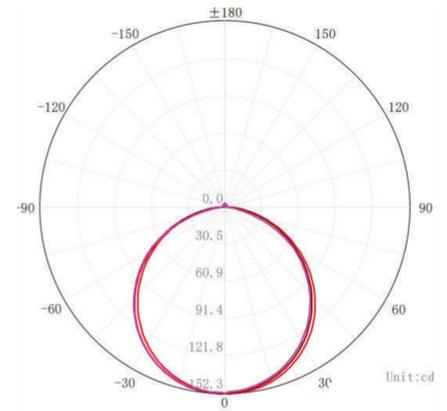

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
3W	3000K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-3K
3W	6500K	130 Lm	D-83mm H-16mm	Non Dimmable	HW-P01-R3W-6K
6W	3000K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-3K
6W	6500K	390 Lm	D-115mm H-16mm	Non Dimmable	HW-P01-R6W-6K
12W	3000K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-3K
12W	6500K	1000 Lm	D-170mm H-17mm	Non Dimmable	HW-P01-R12W-6K
18W	3000K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-3K
18W	6500K	1540 Lm	D-220mm H-17mm	Non Dimmable	HW-P01-R18W-6K

For more information, please visit www.HoneywellLights-fans.com.