




LED RECESSED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch
Only to 18W CCT and 24W cct models




AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

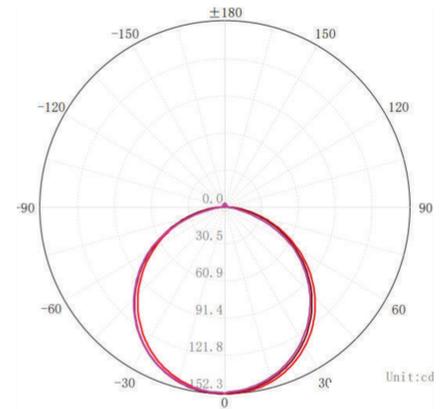

SPECIFICATIONS

Shape:	Square LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K	390 Lm	120mm x120mm x 18mm	Non Dimmable	HW-P02-S6W-3K
6W	6000K	390Lm	120mm x120mm x 18mm	Non Dimmable	HW-P02-S6W-6K
6W	3000K/4000K/6500K	323Lm/398Lm/332Lm	119mm x119mm x 18mm	Non Dimmable	HW-P06-S6W-CCT
12W	3000K/4000K/6500K	733Lm/824Lm/744Lm	169mm x169mm x 18mm	Non Dimmable	HW-P06-S12W-CCT
18W	3000K	1540Lm	220mm x220mm x 18mm	Non Dimmable	HW-P02-S18W-CCT
18W	6500K	1540Lm	220mm x220mm x 18mm	Non Dimmable	HW-P02-S18W-CCT
18W	3000K/4000K/6500K	1430Lm/1580Lm/1430Lm	220mm x220mm x 18mm	Non Dimmable	HW-P06-S18W-CCT
24W	3000K/4000K/6500K	1730Lm/1900Lm/1730Lm	290mm x290mm x 18mm	Non Dimmable	HW-P06-S24W-CCT

For more information, please visit www.HoneywellLights-fans.com.

Illuminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432
Email: info@HoneywellLights-fans.com
www.HoneywellLights-fans.com

©2025 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC103 | 01-2025