



LED SURFACE PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE




AVAILABLE WATTAGE OPTIONS:

- 12W
- 18W

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or uv emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

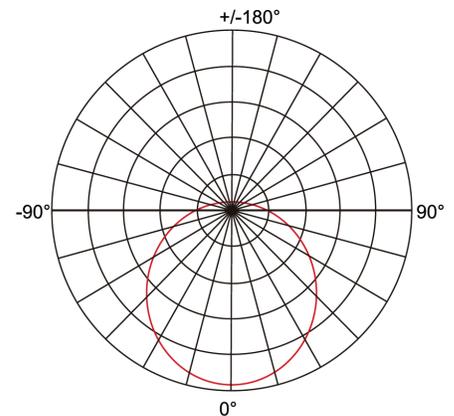

SPECIFICATIONS

Shape:	Round LED Lamp
Cap/Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
12W	6500K	750Lm	D-160mm H-27mm	Non Dimmable	HW-P03-R12W-6K
18W	6500K	1200Lm	D-210mm H-27mm	Non Dimmable	HW-P03-R18W-6K

For more information, please visit www.HoneywellLights-fans.com.