



**SURFACE MOUNTED LED PANEL**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**




**AVAILABLE WATTAGE OPTIONS:**

- 18W
- 24W

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

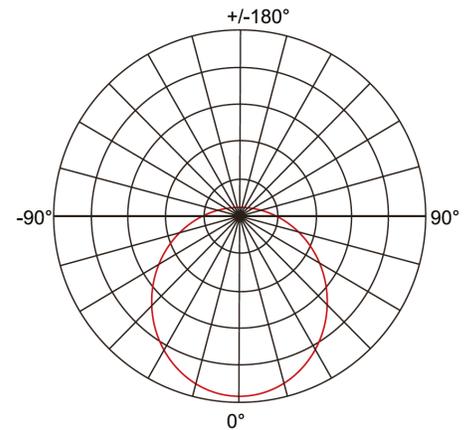

**SPECIFICATIONS**

Shape:	Square LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

**ADDITIONAL INFORMATION**

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
18W	6500K	1540Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-6K
18W	3000K	1540Lm	210mm x 210mm x 27mm	Non Dimmable	HW-P04-S18W-3K
24W	3000K	1400Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-3K
24W	6500K	1400Lm	282mm x 282mm x 28mm	Non Dimmable	HW-P04-S24W-6K

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).