



RECESSED LED PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 9W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

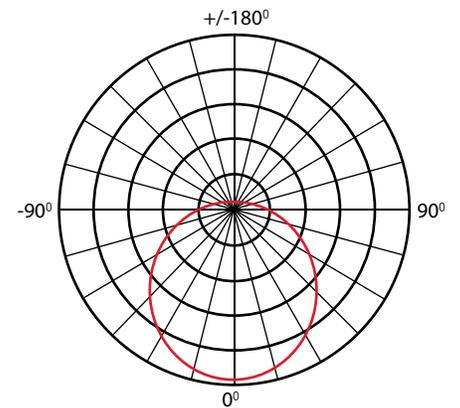

SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Recessed Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	362Lm/445Lm/353Lm	D-115mm H-18mm	Non Dimmable	HW-P05-R6W-CCT
9W	3000K/4000K/6500K	627Lm/667Lm/627Lm	D-167mm H-18mm	Non Dimmable	HW-P05-R9W-CCT
12W	3000K/4000K/6500K	815Lm/916Lm/827Lm	D-167mm H-18mm	Non Dimmable	HW-P05-R12W-CCT
18W	3000K/4000K/6500K	1430Lm/1580Lm/1430Lm	D-220mm H-18mm	Non Dimmable	HW-P05-R18W-CCT
24W	3000K/4000K/6500K	1730Lm/1900Lm/1730Lm	D-292mm H-18mm	Non Dimmable	HW-P05-R24W-CCT

For more information, please visit www.HoneywellLights-fans.com.