



LED SURFACE PANEL LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE



(CCT) Color Temperature Switch




### AVAILABLE WATTAGE OPTIONS:

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

### BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

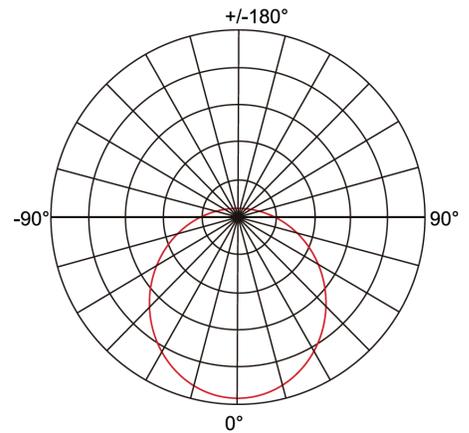

### SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

### ADDITIONAL INFORMATION

Volt:	100-265V 50-60Hz	100-277V 50-60Hz
Beam Angle:	110°	
Certification:	CE	

### AVAILABLE WATTAGE OPTIONS

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
6W	3000K/4000K/6500K	330 Lm / 440 Lm / 330 Lm	D-112mm H-28mm	Non Dimmable	HW-P07-R6W-CCT
12W	3000K/4000K/6500K	770 Lm / 880 Lm / 770 Lm	D-160mm H-28mm	Non Dimmable	HW-P07-R12W-CCT
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	D-210mm H-28mm	Non Dimmable	HW-P07-R18W-CCT (White or Black)
24W	3000K/4000K/6500K	1730 Lm / 1900 Lm / 1730 Lm	D-282mm H-28mm	Non Dimmable	HW-P07-R24W-CCT

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).