



**SURFACE MOUNTED LED PANEL**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



(CCT) Color Temperature Switch




**AVAILABLE WATTAGE OPTIONS:**

- 6W-CCT Switchable
- 12W-CCT Switchable
- 18W-CCT Switchable
- 24W-CCT Switchable

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

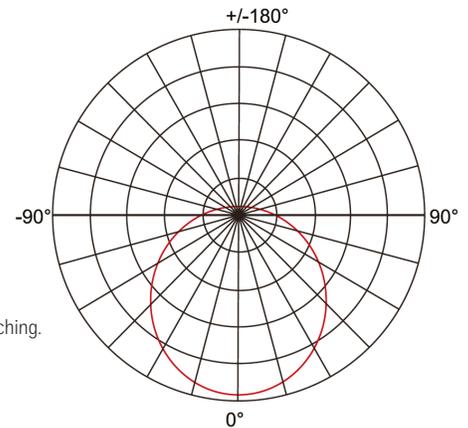

**SPECIFICATIONS**

Shape:	Square LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White or Black

**ADDITIONAL INFORMATION**

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Brightness	Size	Dimmable / Non Dimmable	Model
18W	3000K/4000K/6500K	1430 Lm / 1580 Lm / 1430 Lm	210mm x 210mm x 28mm	Non Dimmable	HW-P08-S18W-CCT (White or Black)

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).