




**DIMMABLE LED PANEL**

**LUMINOUS INTENSITY DISTRIBUTION CURVE**



**(CCT) Color Temperature Switch**




**AVAILABLE WATTAGE OPTIONS:**

- 6W-CCT Switchable
- 12W-CCT Switchable

**BENEFITS:**

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

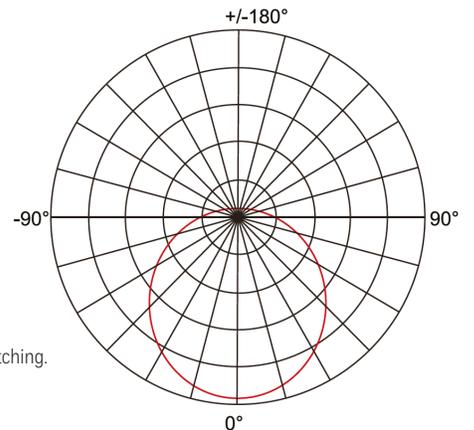

**SPECIFICATIONS**

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

**ADDITIONAL INFORMATION**

Volt:	110-130V 50-60Hz
Beam Angle:	110°
Certification:	CE

**AVAILABLE WATTAGE OPTIONS**

Power	Tone	Luminary Flux	Size	Dimmable / Non Dimmable	Model
6W	2700K/3000K/3500K/4000K/5000K	450 Lm	D-120mm H-20mm	Dimmable	HW-P10-R6W-5CCT
12W	2700K/3000K/3500K/4000K/5000K	945 Lm	D-170mm H-20mm	Dimmable	HW-P10-R12W-5CCT

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com).