




SLIM SURFACE LIGHT

LUMINOUS INTENSITY DISTRIBUTION CURVE




BENEFITS:

- Energy efficiency.
- Improved environmental performance.
- Ability to operate in cold conditions.
- No heat or UV emissions.
- Design flexibility.
- Instant lighting and the ability to withstand frequent switching.
- Long lifespan.
- General lighting for limited build-in height.

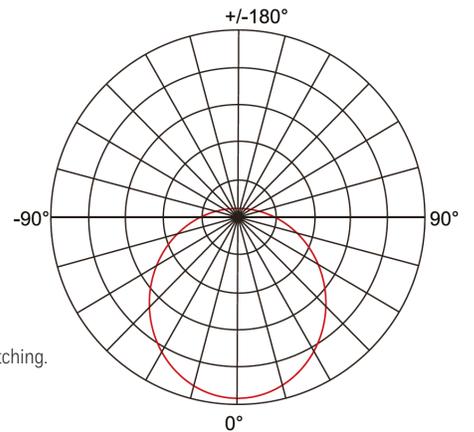

(CCT) Color Temperature Switch



SPECIFICATIONS

Shape:	Round LED Lamp
Fitting:	Surface Mounted Ceiling
Finish:	White

ADDITIONAL INFORMATION

Volt:	100-277V 50-60Hz
Beam Angle:	110°
Certification:	CE

AVAILABLE WATTAGE OPTIONS

Power	Tone	Luminary Flux	Size	Dimmable / Non Dimmable	Model
13W	3000K/4000K/6500K	1050 Lm	D-180mm H-26mm	Non Dimmable	HW-P11-R13W-CCT

For more information, please visit www.HoneywellLights-fans.com.