



## VOLTAGE PROTECTOR



### PROTECTION FUNCTION

- Over / Under Voltage Protection.
- Phosphor copper parts.
- Flame retardant shell.

### Common Uses


A/C up to 30,000/18,000BTU, refrigerators, TV's, freezers, washing machines, water cooler, computers, coffee makers, microwaves, electric stoves, and multiple electronic devices.



HW-SP-05



HW-SP-04

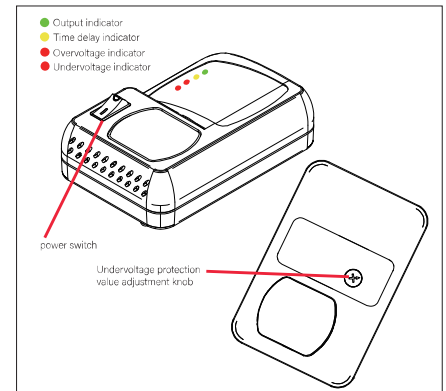

### AVAILABLE OPTIONS:

HW-SP-04

HW-SP-05 ETL Certification

### PERFORMANCE PARAMETER

Color: Transparent

### ENERGY INFORMATION

	HW-SP-05	HW-SP-04
Voltage:	120V	220V
Frequency:	60Hz	50/60Hz
Current:	15A	20A
Delay time:	180s	180s
Under voltage:	90V-105V	170V-197V
Over Voltage:	140V	265V

For more information, please visit [www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

### Iluminaciones Técnicas S.A.

Panama Headquarters 1 (888) 502-8432  
 Email: [info@HoneywellLights-fans.com](mailto:info@HoneywellLights-fans.com)  
[www.HoneywellLights-fans.com](http://www.HoneywellLights-fans.com)

©2022 ILUMINACIONES TECNICAS S.A. All rights reserved.

The Honeywell trademark is used under license from Honeywell International Inc.

Honeywell makes no representations or warranties with respect to this product. Manufactured by Iluminaciones Técnicas S.A.

SPEC084 | 01-2023